

<b>13BECS703</b>	<b>OBJECT ORIENTED ANALYSIS AND DESIGN</b>	<b>L</b>	<b>T</b>	<b>P</b>	<b>C</b>
		<b>3</b>	<b>0</b>	<b>0</b>	<b>3</b>

### **COURSE OBJECTIVES:**

- To understand the concepts of object oriented analysis and design
- To understand the object oriented life cycle.
- To know how to identify objects, relationships, services and attributes through UML.

### **LEARNING OUTCOMES:**

- To understand the use-case diagrams.
- To know the Object Oriented Design process.
- To know about software quality and usability.

#### **UNIT- I INTRODUCTION (9)**

An Overview of Object Oriented Systems Development - Object Basics – Object Oriented Systems Development Life Cycle.

#### **UNIT- II OBJECT ORIENTED METHODOLOGIES (9)**

Rumbaugh Methodology - Booch Methodology - Jacobson Methodology - Patterns – Frameworks – Unified Approach – Unified Modeling Language – Use case - class diagram - Interactive Diagram - Package Diagram - Collaboration Diagram - State Diagram - Activity Diagram.

#### **UNIT- III OBJECT ORIENTED ANALYSIS (9)**

Identifying use cases - Object Analysis - Classification – Identifying Object relationships - Attributes and Methods.

#### **UNIT- IV OBJECT ORIENTED DESIGN (9)**

Design axioms - Designing Classes – Access Layer - Object Storage - Object Interoperability.

#### **UNIT- V SOFTWARE QUALITY AND USABILITY (9)**

Designing Interface Objects – Software Quality Assurance – System Usability - Measuring User Satisfaction

**Total hours:45**

### **TEXT BOOKS:**

1. Ali Bahrami Object Oriented Systems Development Tata McGraw- Hill 2008
2. Martin Fowler Martin Fowler PHI/Pearson Education 2007

### **REFERENCES:**

1. Stephen R. Schach Introduction to Object Oriented Analysis and Design Tata McGraw-Hill 2003
2. James Rumbaugh, Ivar Jacobson, Grady Booch The Unified Modeling Language Reference Manual Addison Wesley 2005
3. Hans-Erik Eriksson, Magnus Penker, Brain Lyons, David Fado UML Toolkit OMG Press Wiley Publishing Inc 2004

## **LESSON PLAN**

### **COURSE EDUCATIONAL OBJECTIVES:**

- The main objective is the students become familiar with all phases of OOAD.
- Master the main features of the UML.
- Master the main concepts of Object Technologies and how to apply them at work and develop the ability to analyze and solve challenging problem in various domains.
- Learn the Object design Principles and understand how to apply them towards implementation.

### **COURSE OUTCOMES:**

After the completion of the course, students should be able to:

1. Select the basic elements of modeling such as Things, Relationships and Diagrams depending on the views of UML Architecture and SDLC.
2. Apply basic and Advanced Structural Modeling Concepts for designing real time applications.
3. Design Class and Object Diagrams that represent Static Aspects of a Software System.
4. Analyze Dynamic Aspects of a Software System using Use Case, Interaction and Activity Diagrams.
5. Apply techniques of State Chart Diagrams and Implementation Diagrams to model behavioral aspects and Runtime environment of Software Systems.

## Detailed Lesson Plan

S.NO	DATE	TOPIC TO BE COVERED	Actual Date	No. of HOURS	Content delivery Methods
<b>UNIT-I INTRODUCTION TO UML</b>					
1	22/06/15	Importance of Modelling		1	DM1
2	23/06/15	Principles of modelling		1	DM1
3	25/06/15	Object Oriented modelling		1	DM1
4	26/06/15	Conceptual model of the UML		1	DM1
5	27/06/15	Conceptual model of the UML		1	DM6
6	29/06/15	Conceptual model of the UML		1	DM6
7	30/06/15	UML Architecture		1	DM1
8	06/07/15	Software Development life cycle		1	DM6
9	07/07/15	<b>Tutorial-I</b>		1	<b>DM2</b>
10	09/07/15	Software Development life cycle		1	DM1
<b>UNIT-II STRUCTURAL MODELLING</b>					
11	10/07/15	<b>Basic Structural Modelling:</b> Classes		1	DM1

12	13/07/15	Basic Structural Modelling: Classes		1	DM6
13	14/07/15	Relation ships		1	DM1
14	16/07/15	Common mechanisms		1	DM1
15	17/07/15	Common mechanisms		1	DM6
16	20/07/15	Common mechanisms		1	DM6
17	21/07/15	Diagrams		1	DM1
18	23/07/15	<b>Tutorial-II</b>			<b>DM2</b>
19	24/07/15	Diagrams		1	DM6
20	25/07/15	<b>Advanced Structural Modelling: Classes</b>		1	DM2
21	27/07/15	Advanced Relation ships		1	DM1
22	28/07/15	Interfaces		1	DM6
23	30/07/15	Types and Roles		1	DM6
24	31/07/15	Packages			DM1
25	01/08/15	<b>Tutorial-III</b>			<b>DM2</b>

26	03/07/15	Review			DM6
	<b>UNIT-III CLASSES &amp; OBJECT DIAGRAMS</b>				
27	04/07/15	Terms & Concepts - Class diagrams		1	DM1
28	06/07/15	Modelling techniques for class diagrams		1	DM1
29	07/07/15	Modelling techniques for class diagrams		1	DM1
30	10/07/15	<b>MID-I EXAMS</b>			
31	11/07/15				
32	13/07/15				
33	14/07/15				
34	17/08/15				
35	18/08/15	Terms & Concepts - Object diagrams		1	DM1
36	20/08/15	Modelling techniques for Object diagrams		1	DM6
37	21/08/15	Modelling techniques for Object diagrams		1	DM6
38	22/08/15	<b>Tutorial-IV</b>		1	<b>DM2</b>
	<b>UNIT-IV BASIC BEHAVIORAL MODELLING</b>				

39	24/08/15	Interactions		1	DM1
40	25/08/15	Interaction diagrams- Sequence		1	DM1
41	27/08/15	Interaction diagrams - Collaborations		1	DM1
42	28/08/15	Interaction diagrams –C M Techniques		1	DM6
43	29/08/15	Use cases		1	DM1
44	31/08/15	Use case Diagrams		1	DM1
45	01/09/15	Common modelling techniques		1	DM6
46	03/09/15	Activity diagrams		1	DM1
47	04/09/15	Common modelling techniques		1	DM6
48	05/09/15	<b>Tutorial-V</b>		1	<b>DM2</b>
49	07/09/15	Review			DM6
50	08/09/15	Review			DM6
<b>UNIT-V</b>					
51	10/09/15	<b>Advanced Behavioral Modelling</b>		1	DM6
52	11/09/15	Events and Signals		1	DM1

53	14/09/15	Events and Signals		1	DM6
54	15/09/15	State machines		1	DM6
55	18/09/15	Processes and Threads		1	DM1
56	19/09/15	Time and Space		1	DM1
57	21/09/15	State Chart Diagrams		1	DM6
58	22/09/15	State Chart Diagrams		1	DM6
59	25/09/15	<b>Tutorial-VI</b>		1	<b>DM2</b>
60	26/09/15	<b>Architectural Modelling</b>		1	DM1
61	28/09/15	Components		1	DM1
62	29/09/15	Component Diagrams		1	DM6
63	01/10/15	Deployment		1	DM1
64	03/10/15	Deployment Diagrams		1	DM6
65	05/10/15	<b>Tutorial-VII</b>		1	<b>DM2</b>
66	06/10/15	Review		1	DM6
67	08/10/15	Review			DM6

68	09/10/15	Review			DM6
69	12/10/15	Review of Unit - IV			DM6
70	13/10/15	Review of Unit - III			DM6
71	15/10/15	Review of Unit - II			DM6
72	16/10/15	Review of Unit - II			DM6
73	17/10/15	Review of Unit - I			DM6
74	26/10/15	<b>MID – II EXAMS</b>			
75	27/10/15				
76	29/10/15				
77	30/10/15				
78	31/10/15				

TEXT BOOK :

1. Grady Booch, James Rumbaugh, Ivar Jacobson : The Unified Modeling Language User Guide, Pearson Education.

## UNIT-I

## Introduction:

The various trends in S/W development give the change in the languages. In earlier days S/W developers used Machine Languages, which deals with 0's and 1's [Binary Number]. S/W developers felt it was difficult to program using binary numbers. In later stage Assembly Language was used for a programming. Assembly Language uses mnemonics, which is better than binary language. Then high-level language was introduced. The human understandable English is used in the programming languages. Initial stages of high-level languages have the procedural /structural languages. Programmers concentrate more on functions rather than data. To overcome this object oriented programming languages was introduced. In OOProgramming the programmer concentrate or gives equal importance to functions and data. The advantages over procedure languages are OOPS concepts.


Machine Language 0,1



Assembly Language Mnemonics



High Level Language Human Understandable Language

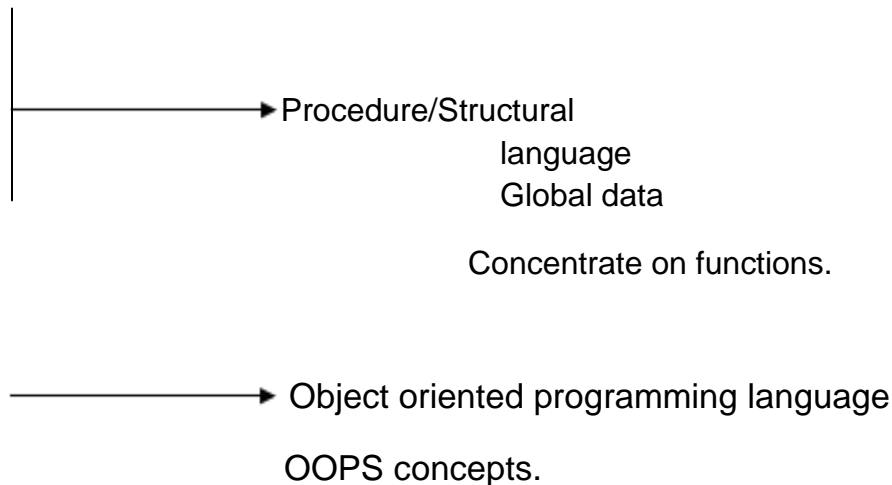

The OOPS concepts are

Data hiding

Data encapsulation

Data abstraction

Inheritance

Polymorphism

Objects

Class

Dynamic binding

Message passing.

The detailed view of oops concepts is discussed later.

## OBJECT ORIENTATION:

Object oriented methods enable us to create sets of objects that work together synergistically to produce software that better module their problem domains than similar systems produced by traditional techniques. The system created using object oriented methods are easier to adapt changing requirements, easier to maintain, more robust, promote greater design. The reasons why object orientation works

High level of abstraction.

Seamless transition among different phases of software development.

Encourage of good programming techniques.

Promotion of reusability.

### High level of abstraction:

Top-down approach    It supports abstraction of the function level.

Objects oriented approach     It supports abstraction at the object level.

The

object encapsulate both the data (attributes) and functions (methods), they work as a higher level of abstraction. The development can proceed at the object level, this makes designing, coding, testing, and maintaining the system much simpler.

### Seamless transition among different phases of software development

Traditional Approach:

The software development using this approach requires different styles and methodologies for each step of the process. So moving from one phase to another requires more complex transistion.

Object-oriented approach:

We use the same language to talk about analysis, design, programming and database design. It returns the level of complexity and reboundary, which makes clearer and robust system development.

### Encouragement of good programming techniques:

A class in an object-oriented system carefully delineates between its interface and the implementation of that interface. The attributes and methods are encapsulated within a class (or) held together tightly. The classes are grouped into subsystems but remain independent one class has no impact on other classes. Object oriented approach is not a magical one to promote perfect design (or) perfect code.

Raising the level of abstraction from function level to object level and focusing on the real-world aspects of the system, the object oriented method tends to Promote clearer designs.

Makes implementation easier.

Provide overall better communication.

### Promotion of Reusability:

Objects are reusable because they are modeled directly out of real world. The classes are designed generically with reuse. The object orientation adds inheritance, which is a powerful technique that allows classes to built from each other. The only differents and enhancements between the classes need to be designed and coded. All the previous functionality remains and can be reused without change.

## OBJECT-ORIENTED SYSTEM DEVELOPMENT

Traditional Software Development:

The S/W development is based on function and procedures.

Object-oriented software development:

It is a way to develop software by building self-contained modules or objects that can be easily replaced, modified and reused. In an object-oriented environment, software is a collection of discrete objects that encapsulate their data as well as the functionality to model real-world objects. An object orientation yields important benefits to the practice of software construction. Each object has attributes (data) and methods (function). Objects are grouped into classes.

In object-oriented system, everything is an object and each object is responsible for itself.

For example:

Windows applications need windows objects that can open themselves on screen and either display something or accept input.

Windows objects are responsible for things like opening, sizing, and closing themselves.

When a window displays something, that something is an object. (ex) chart.


Chart objects are responsible for maintaining their data and labels and even for drawing themselves.


Review of objects:

The object-oriented system development makes software development easier and more natural by raising the level of abstraction to the point where applications can be implemented. The name object was chosen because “everyone knows what an object is”. The real question is “what do objects have to do with system development” rather than “what is an object?”

Object:

A car is an object, a real-world entity, identifiable and separate from its surroundings. A car has a well-defined set of attributes in relation to other objects.

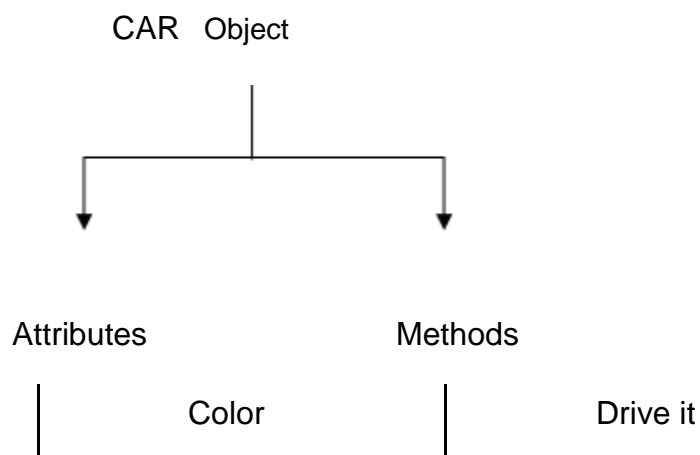

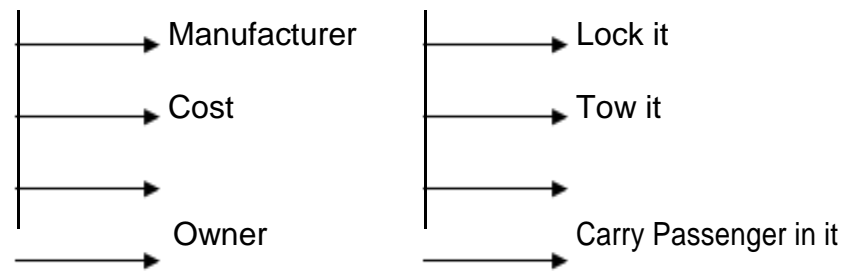

### Attributes:

Data of an object.

Properties of an object.

### Methods:

Procedures of an  
object. or

Behaviour of an object.

The term object was formally utilized in the similar language. The term object means a combination of data and logic that represent some real-world entity.

When developing an object-oriented application, two basic questions arise

What objects does the application need?


What functionality should those objects have?

Programming in an object-oriented system consists of adding new kinds of objects to the system and defining how they behave. The new object classes can be built from the objects supplied by the object-oriented system.

Object state and properties (Attributes):

Properties represent the state of an object. In an object oriented methods we want to refer to the description of these properties rather than how they are represented in a particular programming language.

Car

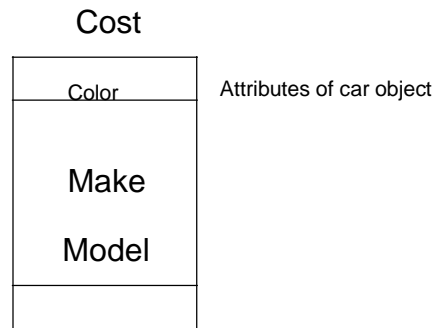

We could represent each property in several ways in a programming languages.

For example:

- Color
1. Can be declared as character to store sequence or character [ex: red, blue, ..]
  2. Can declared as number to store the stock number of paint [ex: red paint, blue paint, ..]
  3. Can be declared as image (or) video file to refer a full color video image.

The importance of this distinction is that an object abstract state can be independent of its physical representation.

Object Behaviour and Methods:

We can describe the set of things that an object can do on its own (or) we can

do with it.

For example:

Consider an object car,

We can drive the car.

We can stop the car.

Each of the above statements is a description of the objects behaviour. The objects behaviour is described in methods or procedures. A method is a function or procedures that is defined in a class and typically can access to perform some operation. Behaviour denotes the collection of methods that abstractly describes what an object is capable of doing. The object which operates on the method is called receiver. Methods encapsulate the behaviour or the object, provide interface to the object and hide any of the internal structures and states maintained by the object. The procedures provide us the means to communicate with an object and access it properties.

For example:

An employee object knows how to compute salary. To compute an employee salary, all that is required is to send the compute payroll message to the employee object.


So the simplification of code simplifies application development and maintenance.

Objects Respond to Messages:

The capability of an object's is determined by the methods defined for it. To do an operation, a message is sent to an object. Objects represented to messages according to the methods defined in its class.

For example:

When we press on the brake pedal of a car, we send a stop message to the car object. The car object knows how to respond to the stop message since brake have been designed with specialized parts such as break pads and drums precisely respond to that message.

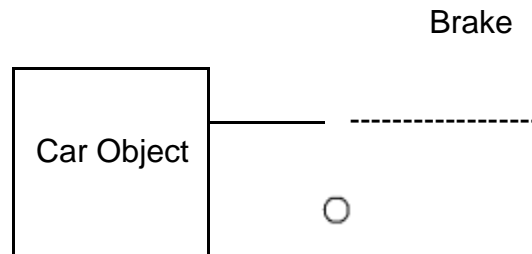


Different object can respond to the same message in different ways. The car, motorcycle and bicycle will all respond to a stop message, but the actual operations performed are object specific.

It is the receiver's responsibility to respond to a message in an appropriate manner. This gives the great deal or flexibility, since different object can respond to the same message in different ways. This is known as polymorphism.

Objects are grouped in classes:


The classification of objects into various classes is based its properties (states) and behaviour (methods). Classes are used to distinguish are type of object from another. An object is an instance of structures, behaviour and inheritance for objects. The chief rules are the class is to define the properties and procedures and applicability to its instances.


For example:

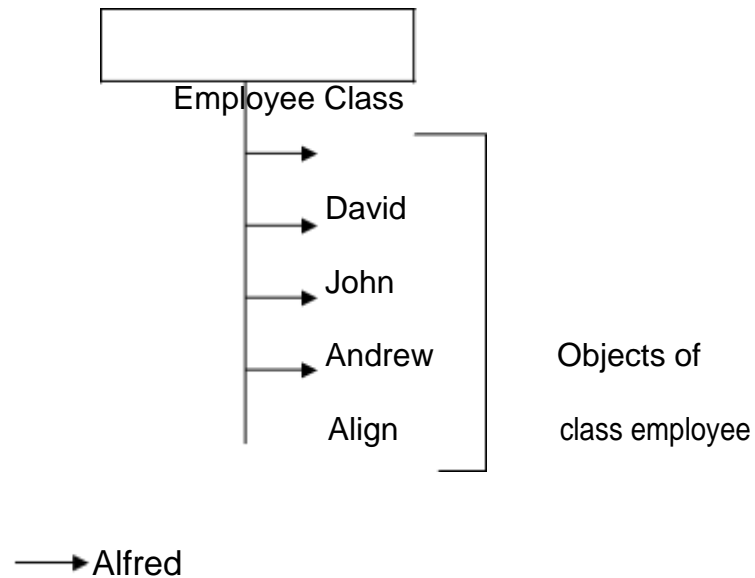

Class Hierarchy:

An object-oriented system organizes classes into a subclass super class hierarchy. The properties and behaviours are used as the basis for making distinctions between classes are at the top and more specific are at the bottom of the class hierarchy. The family car is the subclass of car. A subclass inherits all the properties and methods defined in its super class.


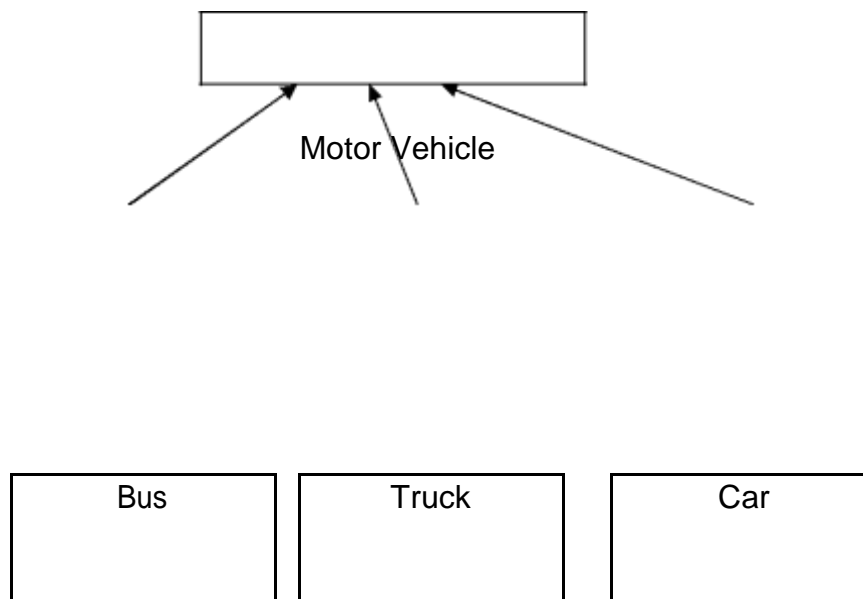


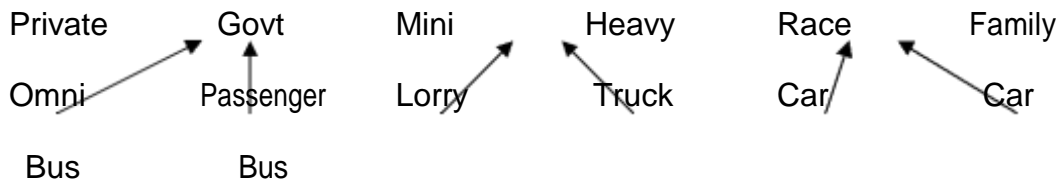

Super class/Subclass Hierarchy

### Inheritance:

It is the property of object-oriented systems that allow objects to be built from other objects. Inheritance allows explicitly taking advantage of the commonality of objects when constructing new classes. Inheritance is a relationship between classes where one class is the parent class of another (derived) class. The derived class holds the properties and behaviour of base class in addition to the properties and behaviour of derived class.

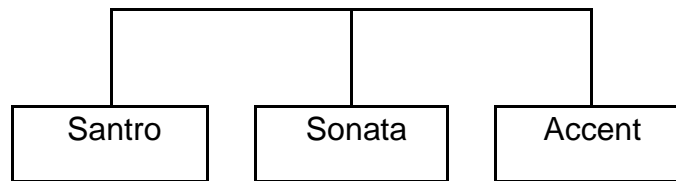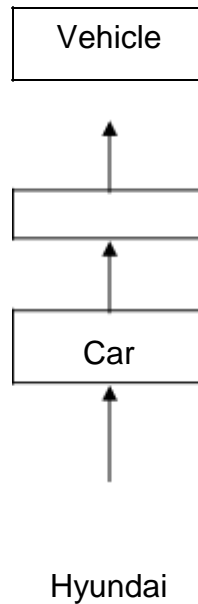

Inheritance allows reusability.

Dynamic Inheritance:

Dynamic inheritance allows objects to change and evolve over time. Since base classes provide properties and attributes for objects, hanging base classes changes the properties and attributes of a class.

Example:


A window objects change to icon and basic again. When we double click the folder the contents will be displayed in a window and when close it, changes back to icon. It involves changing a base class between a windows class and icon class.

Multiple Inheritances:

Some object-oriented systems permit a class to inherit its state (attributes) and behaviour from more than one super class. This kind of inheritance is referred to as multiple inheritances.

For example:

Utility vehicle inherits the attributes from the Car and Truck classes.

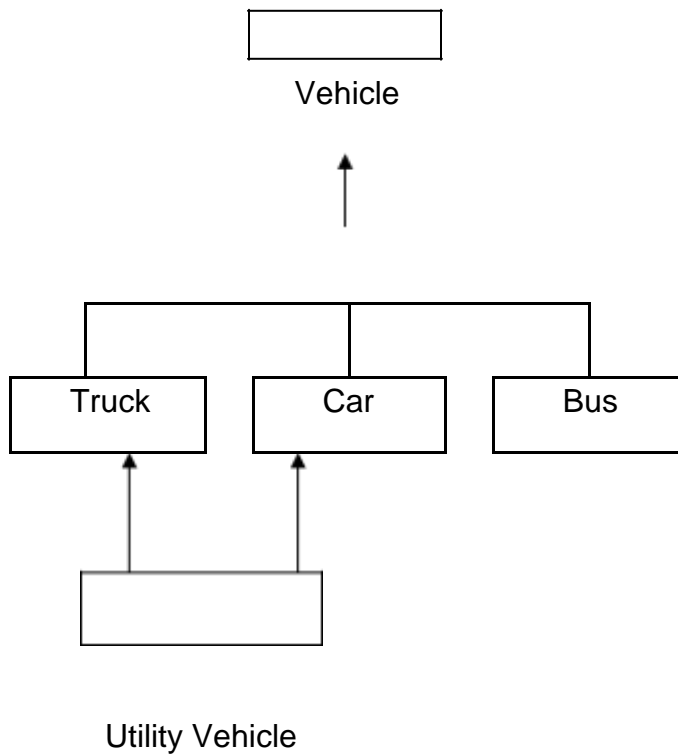

## Encapsulation and Information Hiding:

Information hiding is the principle of concealing the internal data and procedures of an object. In C++ , encapsulation protection mechanism with private, public and protected members.

In per-class protection:

Class methods can access any objects of that class and not just the receiver.

In per-object protection:

Methods can access only the receiver.

An important factor in achieving encapsulation is the design at different classes of objects that operate using a common protocol. This means that many objects will respond to the message using operations tailored to its class.

A car engine is an example of encapsulation. Although engines may differ in implementation, the interface between the driver and car is through a common protocol.

Polymorphism:

Poly      "many"

Morph    "form"

It means objects that can take on or assume many different forms. Polymorphism means that the same operations may behave differently on


different classes. Booch defines polymorphism as the relationship of objects many different classes by some common super class. Polymorphism allows us to write generic, reusable code more easily, because we can specify general instructions and delegate the implementation detail to the objects involved.

Example:

In a pay roll system, manager, office worker and production worker objects all will respond to the compute payroll message, but the actual operations performed are object specific.

Object Relationship and associations:

Association represents the relationships between objects and classes. Associations are bi-directional. The directions implied by the name are the forward direction and the opposite is the inverse direction.



Flown by

A pilot “can fly” planes. The inverse of can fly is “is flown by “. Plane “is flown by” pilot


Cardinality:

It specifies how many instances of one class may relate to a single instance of an associated class. Cardinality constrains the number of related objects and often is described as being “one” or “many”.

Consumer-producer association:

A special form of association is a consumer-producer relationship, also known as a client-server association (or) a use relationship. It can be viewed as one-way interaction. One object requests the service of another object. The object that makes the request is the consumer or client and the object that receives the request and provides the service is the producer (or) server


Example:

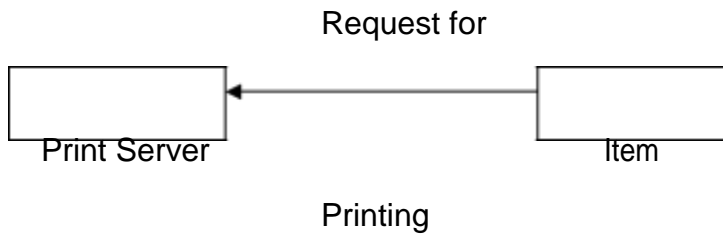

The consumer-producer association we have a print object that prints the consumer object. The print producer provides the ability to print other objects.

### Aggregations:

All objects, except the most basic ones, are composed of and may contain other objects. Breaking down objects into the objects from which they are composed is decomposition. This is possible because an object's attributes need not be simple data fields; attributes can reference other objects. Since each object has an identity, one object can refer to other objects. This is known as aggregation. The car object is an aggregation of other objects such as engine, seat and wheel objects.

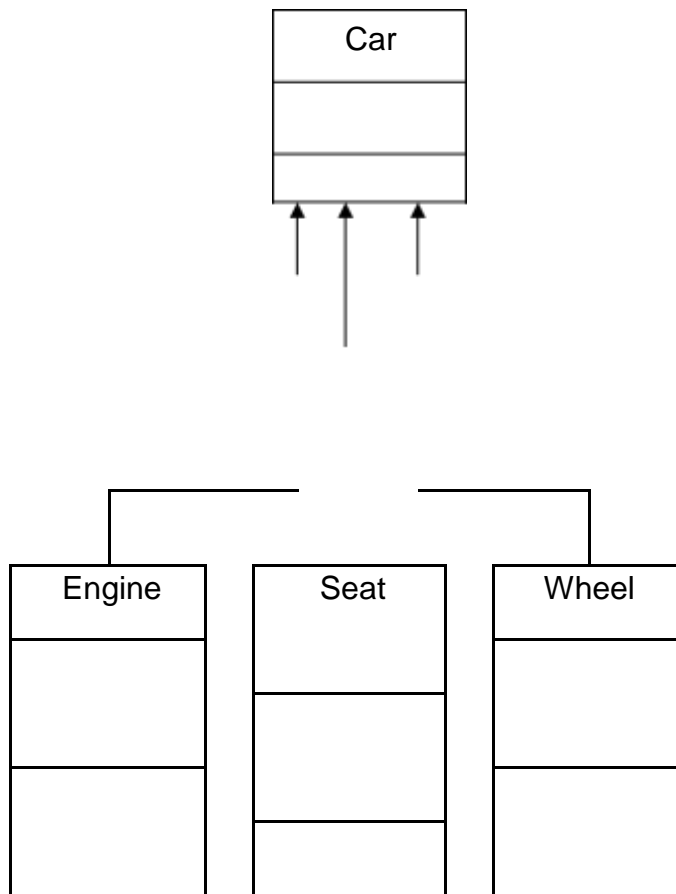

Static and Dynamic Binding:

Determining which function has to be involved at compile time is called static binding. Static binding optimized the calls. (Ex) function call.

The process of determining at run time which functions to involve is termed dynamic binding. Dynamic binding occurs when polymorphic call is issued. It allows some method invocation decision to be deferred until the information is known.

Example:

Cut operation in a edit submenu. It pass the cut operation to any object on the desktop, each or which handles the message in its own way.

Object Persistence:

Objects have a lifetime. They are explicitly created and can exist for a period of time that has been the duration of the process in which they were created. A file or database can provide support for objects having a longer lifeline, longer than the duration of the process for which they are created. This characteristic is called object persistence.

### Meta-Classes:

In an object-oriented system every thing is an object, what about a class? Is a class an object?. Yes, a class is an object. So, If it is an object, it must belong to a class, such a class belong to a class called a meta-class (or) class or classes.

## Object-Oriented Systems Development Life Cycle [OOSDLC]

### Introduction:

The S/W development process that consists of Analysis, Design, implementation, testing and refinement is to transform users needs into a software solution that satisfies those needs. Some people view the s/w developing process as interesting but feel it has less importance in developing s/w. Ignoring the process and plunge into the implementation and programming phases of s/w development is much like the builder who would by pass the architect. The object oriented approach requires a more rigorous process to do things right. We have to spend more time on gathering requirements, developing a requirements model and an analysis model, then turning them into the design model. We should consult a prototype of some of the key system components shortly after the products are selected. It is used to understand how easy or difficult it will be to implement some of the features of the system.

### Software Development process:

S/W development can be viewed as a process. The development itself is a process of change, retirement, transformation (or) addition to the existing product. It is possible to replace one sub process with a new one, as long as the new sub process has the same interface as the old one, to allow it to fit into the process as a whole. The object-oriented approach provides us a set of rules for describing inheritance and specialization in a consistent way when a sub process changes the behaviour of its parent process. The process can be divided into small, interacting phases know as sub processes. The sub processes must be defined in such a way that they are clearly spelled out, to allow each activity to be performed as independently of other sub processes as possible. Each sub process must have

A description in terms of how it works

Specification of the input required for the process


Specification of the output to be produced.

The software development process can be viewed as a series of transformations, where the output of one transformation becomes the input of the subsequent transformation.

Transformation 1 [Analysis]


Transformation 2 [Design]

Transformation 3 [Implementation]

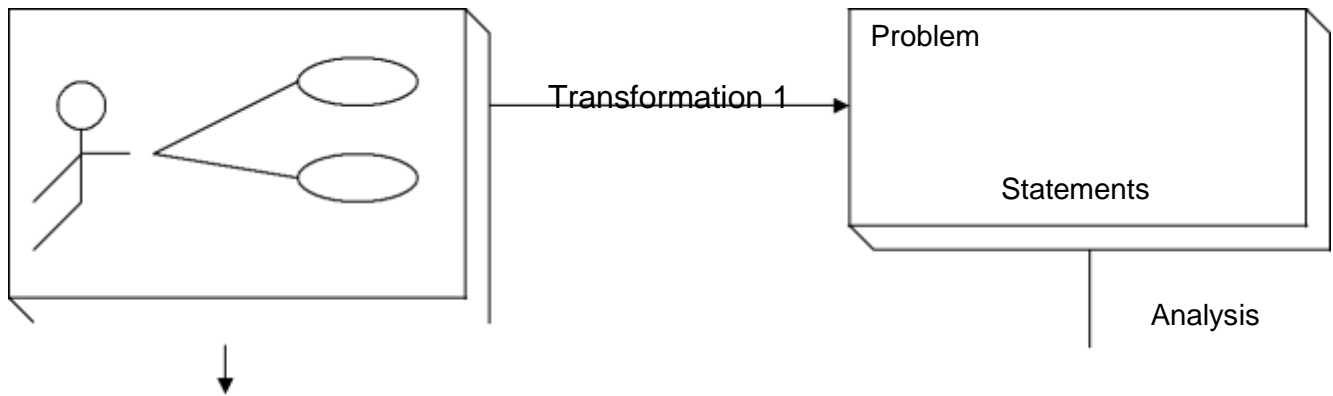

Who are the users of the system?

Transformation 2

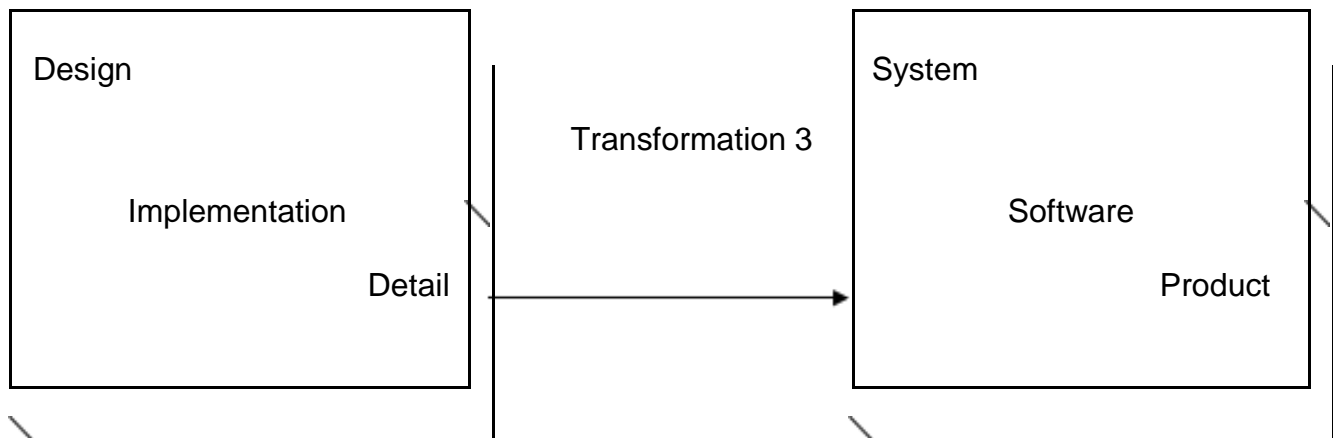

Transformation 1 [Analysis]

It translates the users' needs into system requirements and responsibilities.  
The way they use can provide insight into user requirements.

Transformation 2 [Design]

It begins with a problem statement and ends with a detailed design that can be transformed into an operational system. This transformation includes the bulk of the software development activity, including definition of how to build the software, its development and its testing. It includes the design descriptions, the program and the testing materials.

### Transformation 3 [Implementation]


It refines the detailed design into the system deployment that will satisfy the users needs. It represents embedding the software product within its operational environment.

The software development process is the waterfall approach which starts with deciding

what is to be done (what is the problem)

How to accomplish  
them Which we do it

Test the result to see if we have satisfied the users  
requirements Finally we use what we have done

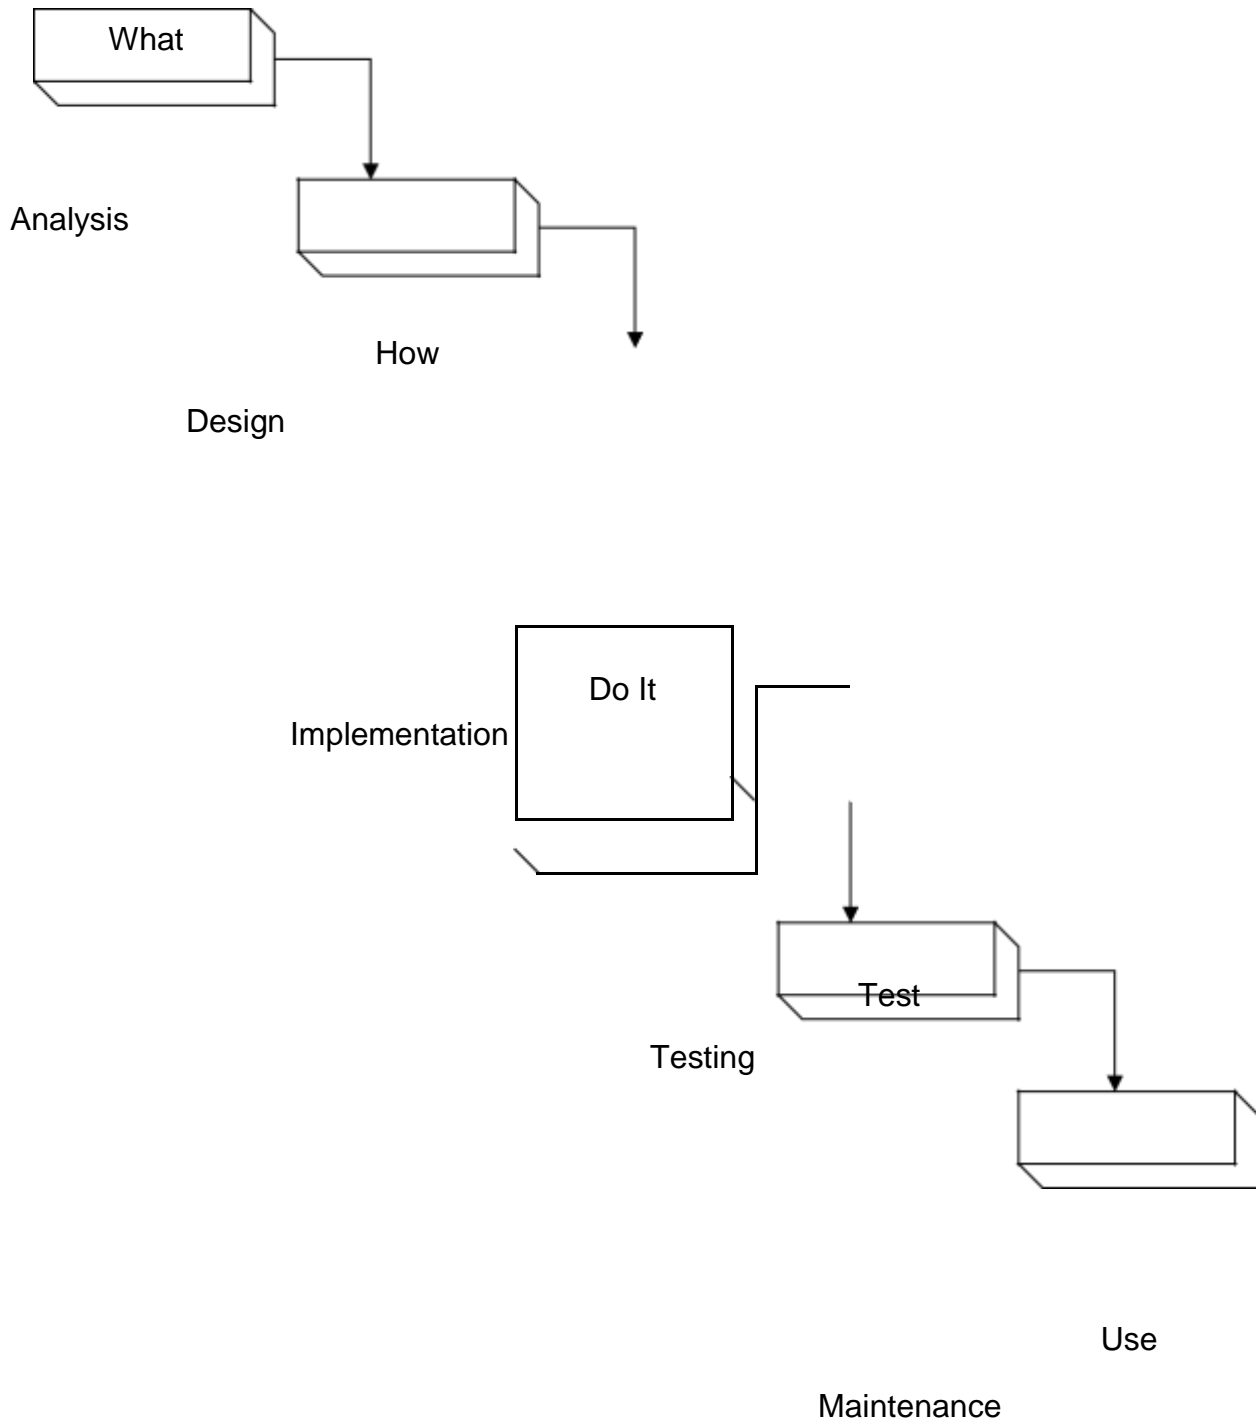

The water fall S/W development process

## Building High-Quality Software

The software process transforms the users needs via the application domain to a software solution that satisfies those needs. High-Quality products must meet users needs and expectations. The quality of the product should be improved prior to delivery rather than correcting them after deliver.

To achieve high quality software we need to be able to answer the following question.

How do we determine when the system is ready for delivery?

It is now operational system that satisfies users needs?


It is correct and operating as we thought it should?

Does it pass an evaluation process?

There are different approaches for systems testing. Blum describes a means of system evaluation in terms of four quality measures,

Correspondence  
Correctness

Verification  
and Validation

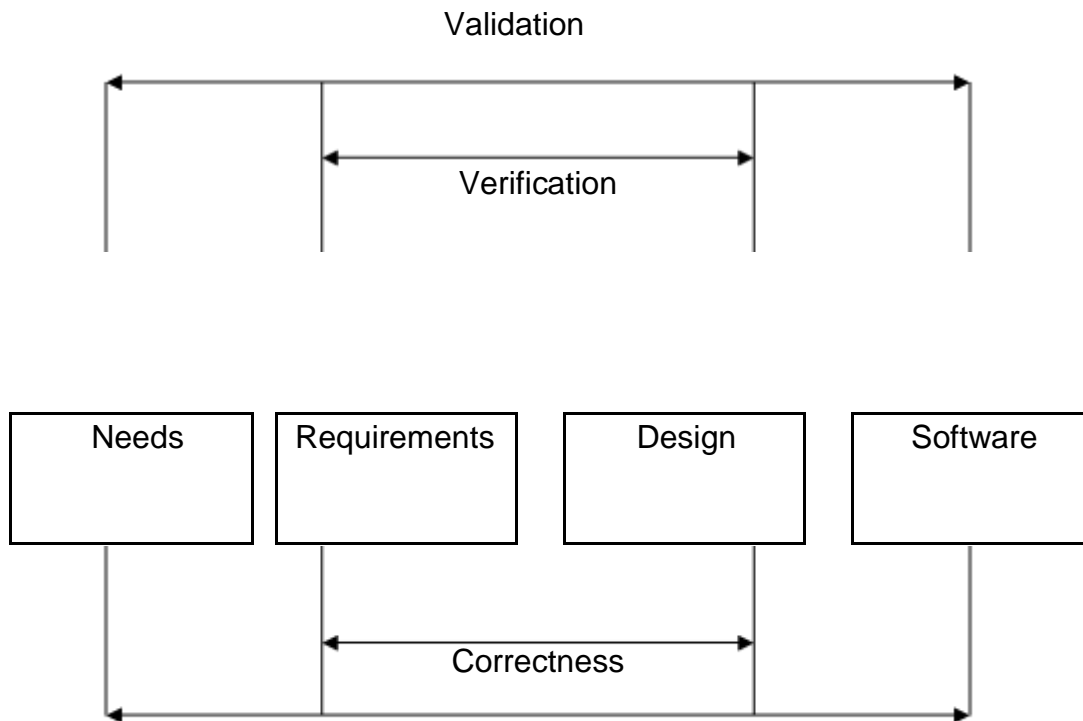

- \* Correspondence measures how well the delivered system matches the needs of the operational environment as described in the original requirements statement.

- \* Validation is the task of predicting correspondence. True correspondence can be determined only after the system is in place

- \* Correctness measures the consistency of the product requirements with respect to the design specification

- \* Verification is the exercise of determining correctness.

Boehm observes that these quality measures, verification and validation is answering the following questions.

Verification- Am I building the product right?


Validation- Am I building the right product.

Object-Oriented Systems Development: A use-case Driven Approach:

The object-oriented S/W development Life Cycle (SDLC) consists of three macro process.

Object-Oriented Analysis  
Object-oriented Design and

Object-oriented Implementation.

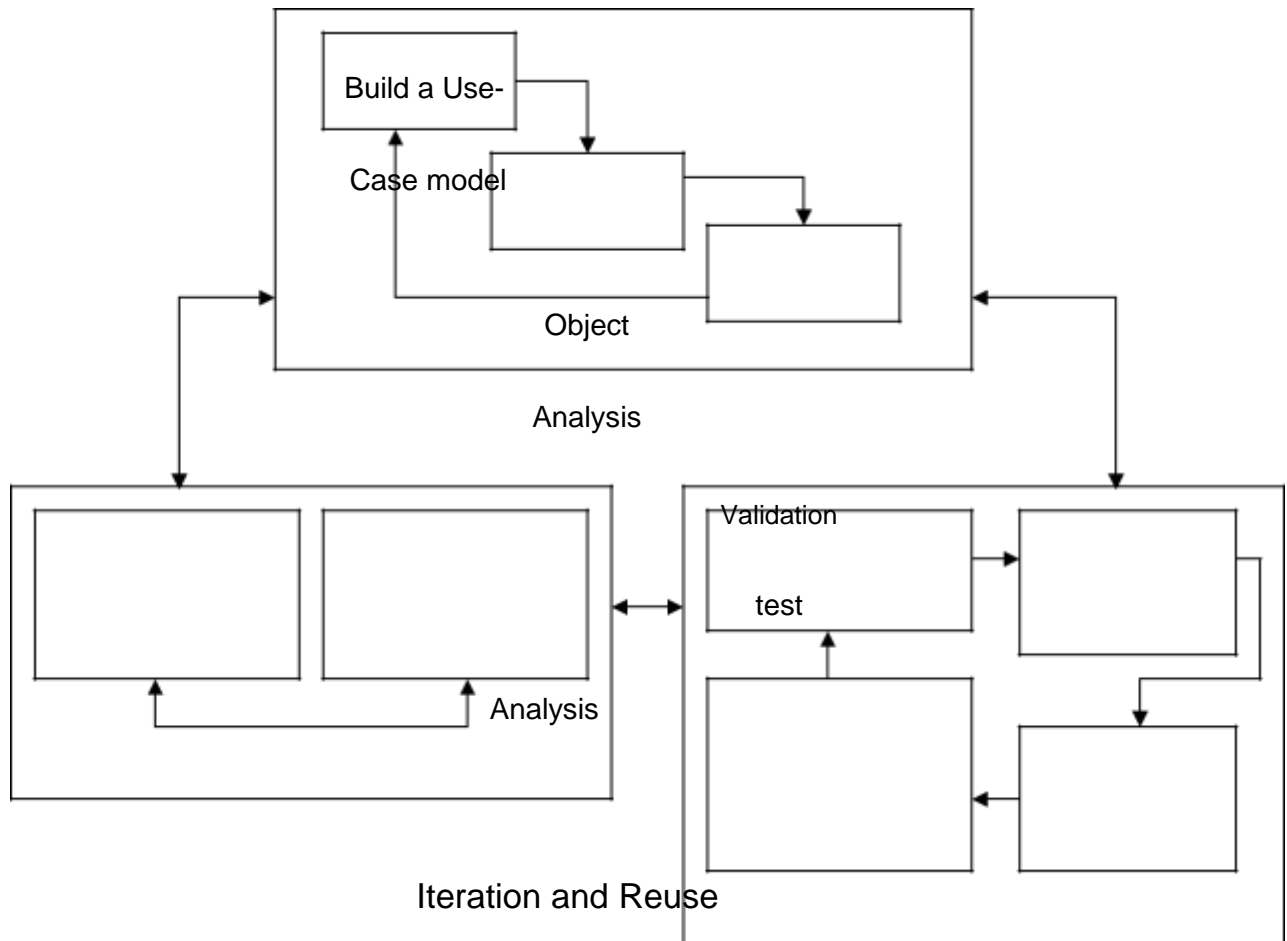

Using Tools  
CASE and/or OO  
Programming  
languages

User Satisfaction  
Usability & QA  
Tests

Design Classes  
Define Attributes  
& Methods

Build Object  
and Dynamic  
Model

Implementation

User satisfaction  
Usability test &  
quality assurance  
test

Build User  
Interface &  
Prototype

Design

The use-case model can be employed throughout most activities of software development. The main advantage is that all design decisions can be traced back directly to user requirements.

Object-oriented Analysis – Use case  
driven Object-oriented design

Prototyping

Component-based development  
Incremental testing

Object-Oriented Analysis –Use-Case Driven:

The object-oriented analysis phase of S/W development is concerned with determining the system requirements and identifying classes and their relationship to other classes in the problem domain. To understand the system requirements we need to identify the users or the actors. Who are the actors and how do they use the system, scenarios are used to help analysis to understand the requirements. Ivar Jacobson came up with the concept of the use case, his name for scenario to describe user-computer system interaction. The object-oriented community has adopted use case to a remarkable degree.

Scenarios are a great way of examine who does what in the interactions among objects and what role they play. That is their inert relationship. This inter actions among the objects roles to achieve a given goal is called collaboration.

A use-case is a typical interaction between a user and a system that captures user goals & needs. Expressing these high-level processes and interactions it is referred to as use-case modeling. Once the use case model is better understood and developed we should start to identify classes and create their relationships.

The physical objects in the system also provide us important information an objects in the system. The objects could be individuals' organizations, machines, units of information; pictures (or) what ever else makes up the application and makes sense in the context of the real-world system.

For example: The object in the payroll system is as follows,

The employee, worker, supervisor, office admin. The paycheck.

The product being made.

The process used to make the product.

The objects need to have meaning only within the context of the application domain.

Few guide lines to use in object-oriented design.

Reuse, rather than build, anew class, know the existing classes.

Design a large number of simple numbers of simple classes, rather than a small number of complex classes.

Design methods.

Critique what we have proposed. It possible go back and refine the classes.

Prototyping:

It is important to construct a prototype of some of the key system components shortly after the products are selected. A prototype is a version of a software product developed in the early stages of the product's life cycle for specific, experimental purposes. It enables to fully understand how easy or difficult it will be to implement some of the features of the system. It gives users a chance to comment on the usability and usefulness of the user interface design, it can define use cases and it makes use Case modeling much easier.

Prototyping was used as a "quick and dirty" way to test the design, user interface and so forth, something to be thrown away when the "industrial strength" version was developed. The rapid application development (RAD) refines the prototype into the final product.

Prototypes have been categorized in various ways. The following categorized are some of the commonly accepted prototypes.

Horizontal prototype

Vertical prototype

Analysis prototype

Domain prototype

#### Horizontal Prototype:

It is a simulation of the interface but contains no functionality. This has the advantages of being very quick to implement, providing a good overall feel of the system and allowing users to evaluate the interface on the basis of their normal, expected perception of the system.

#### Vertical Prototype:

It is a subset of the system features with complete functionality. The advantage of this method is that the few implemented functions can be tested in great depth. The prototypes are hybrid between horizontal and vertical, the major portions of the interface are established so the user can get the feel of the system and features having a high degree of risk are prototyped with much more functionality.

#### Analysis Prototype:

It is an aid for exploring the problem domain. This class of prototype is used to inform the user and demonstrate the proof of a concept. It is not used as the basis of development and is discarded when it has served its purpose.

#### Domain Prototype:

It is an aid for the incremental development of the ultimate software solution. It demonstrates the feasibility of the implementation and eventually will evolve into a deliverable product.

The typical time required to produce a prototype is anywhere from a few days to several weeks, depending on the type and function of prototype. The prototype makes the end users and management members to ascertain that the general structure of the prototype meets the requirements established for the overall design. The purpose of this review is

To demonstrate that the prototype has been developed according to the specification and that the final specification is appropriate.

To collect information about errors or other problems in the system, such as user interface problems that need to be addressed in the intermediate prototype stage

To give management and everyone connected with the project the first glimpse of what the technology can provide.

Prototyping is a useful exercise of almost any stage of the development. Prototyping should be done in parallel with the preparation of the functional specification. It also results in modification to the specification.

Implementation:

Software components are built and tested in-house, using a wide range of technologies. Computer aided software engineering (CASE) tools allow their users to rapidly develop information systems. The main goal of CASE technology is the automation of the entire information system's development life cycle process using a set of integrated software tools, such as modeling, methodology and automatic code generation. The code generated by CASE tools is only the skeleton of an application and a lot needs to be filled in by programming by hand.

Component-Based Development: (CBD)

CASE tools are the beginning of Component-Based Development. Component-Based Development is an industrialized approach to the software development process. Application development to assembly of prebuilt, pretested, reusable software components that operate with each other: The two basic ideas of using Component-Based development.

1. The application development can be improved significantly if applications can be assembled quickly from prefabricated software components.
2. An increasingly large collection of interpretable software components could be made available to developers in both general and specified catalogs.

A CBD developer can assemble components to construct a complete software system. The software components are the functional units of a program, building blocks offering a collection of reusable services. The object-Oriented concept addresses analysis, design and programming, where as component-Based development is concerned with the implementation and system integration aspects of software development.

## Rapid Application Development (RAD):

RAD is a set of tools and techniques that can be used to build application faster than typically possible with traditional methods. The term is often conjunction with S/W prototyping. RAD encourages the incremental development approach of “grow, do not build” software.

### Testing:

(Refer Software Engineering Book )



Design Patterns:

Design pattern is instructive information for that captures the essential structure and insight of a successful family of proven design solutions to a recurring problem that arises within a certain context.

Gang Of Four (GoF) [Erich Gamma, Richard Helm, Ralph Johnson and John Vlissides] introduced the concept of design patterns.

#### Characteristics of Design Patterns:

1. It solves the problem – Design patterns are not just abstract representations of theoretical research. To be accepted as a pattern it should have some proven practical experiences.
2. It's a proven concept – Patterns must have a successful history.
3. It describes a relationship – Patterns do not specify a single class instead it specifies more than one classes and their relationship.
4. It has a human component - Good patterns make the job of the programmer easy and time saving.

#### Contents of Design Pattern:

- Name of the pattern is used to identify the pattern as well as an descriptive of the problem solution in general. Easy to remember and context related names makes remembering patterns easy.
- Context of the pattern describes when and where the pattern is applicable. It also describes the purpose of pattern and also the place where it is not applicable due to some specific conditions.
- Solution of the design pattern is describes how to build the appropriate design using this appropriate design.
- Consequences of design patterns describe the impact of choosing a particular design pattern in a system.

#### Pattern Template:


1. PATTERN NAME (good and relevant names make patterns easy to remember)
2. INTENT (Which problem does the pattern solve)
3. ALSO KNOWN AS(alias names given to the pattern)
4. APPLICABILITY(when should this pattern be applied)
5. STRUCTURE(Graphical representation of the Pattern (using UML))
6. PARTICIPANTS(classes and objects taking part in the pattern and their relationship)

7. COLLABORATORS (says how objects/actors interact to achieve the goal).
  8. CONSEQUENCES (how does they solve the problem and what are the consequences if the problem is solved by this way.)
  9. IMPLEMENTATION (Issues related with Implementation, language specific issues)
  10. KNOWN USES (Examples of the same pattern used in real systems)
  11. RELATED PATTERNS (Specify is there any similar patterns. Where are they used.)
- The Singleton Design Pattern:

1. Pattern Name – Singleton
2. Intent – To ensure a class has only one instance a global point of access to it.
3. Motivation – Its common in software development where some component developers specify that more than one object of a Class alive make systems ambiguous.

4. Applicability – Singleton can be used where there must be exactly one object and it must be accessible to multiple clients/objects.

5. Structure:

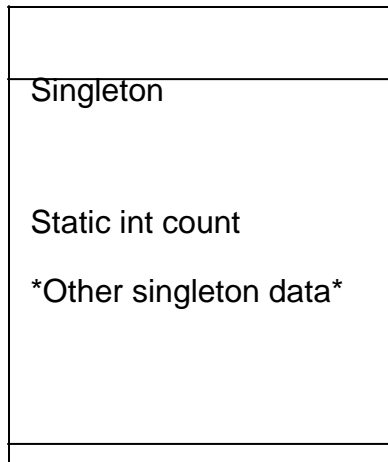

Static singleton \*

create\_Instance()

\*Other singleton

behaviour\*

6. Participants – Singleton class defines a Class function which can be accessed by the clients for creating instance.

7. Collaborations – Clients access a singleton object solely through instance operation.

8. Consequences – Controlled access to the single instance, Reduced name space, can be sub classed and more behaviors can be added, and can be modified for existence of more than one objects(BASED ON THE DOMAIN).

Implementation:

```
class singleton
```

```
{
```

```
    private:
```

```
static int no_of_obj;  
static singleton * pointer_instance;  
// other private data members and member functions
```

```
public:
```

```
static singleton * create_instance()  
{  
    if (no_of_obj==0)  
    {  
        pointer_instance=new singleton;  
        no_of_obj=1;  
    }  
    return pointer_instance;  
}  
}
```

//function f() uses the following statement to create a new instance:

```
singleton s=singleton::create_instance();
```

Generative Patterns: Patterns that suggest the way of finding the solution

Non Generative patterns: They do not suggest instead they give a passive solution.

Non Generative patterns cannot be used in all the situation.

## Frameworks:

Frameworks are the way of delivering application development patterns to support/share best development practice during application development.

In general framework is a generic solution to a problem that can be applied to all levels of development. Design and Software frameworks are most popular where Design pattern helps on Design phase and software frameworks help in Component Based Development phase.

Framework groups a set of classes which are either concrete or abstract. This group can be subclassed into a particular application and recomposing the necessary items.

- a. Frameworks can be inserted into a code where a design pattern cannot be inserted. To include a design pattern the implementation of the design pattern is used.
- b. Design patterns are instructive information; hence they are less in space where Frameworks are large in size because they contain many design patterns.
- c. Frameworks are more particular about the application domain where design patterns are less specified about the application domain.

Note:

Include the details of Microsoft .Net development framework.

## OBJECT ORIENTED METHODOLOGIES:

### Overview of methodologies:

In 1980's, many methodologists were wondering how analysis and design methods and processes would fit into an object-oriented world. Object oriented methods suddenly had become very popular and it was apparent that the techniques to help people execute good analysis and design were just as important as the object-oriented methodologies, sometimes called second-generation object-oriented methods.

Many methodologies are available to choose from for system development. The methodology is based on modeling the business problem and implementing the differences lie primary in the documentation of information, modeling notations and languages. An application can be implemented in many ways to meet some requirements and provide the same functionality. Two people using the methodology may produce

applications designs that look radically different. This does not necessarily mean that one is right and one is wrong, just that they are different.

The various methodologies and their notations are developed by

Jim Rum Baugh  
Grady Booch  
Ivar Jacobson

These is the origin of the UML (Unified Modeling Language)

Each method has its own strengths.

Rum Baugh Method Describing the object model or the static structure of the system.

Jacobson Method Good for providing user driven analysis models.

Booch Method Produces detailed object-oriented design methods.

### Object Modeling Technique (OMT) or Rum Baugh ET AL's Object Modeling Technique:

The object modeling techniques (OMT) presented by Jim Ram Baugh and his counters describes a method for the analysis, design and implementation or system using an object-oriented technique. Object modeling technique (OMT) is a fast, intuitive approach for identifying and modeling all the objects all the objects making up a system. The information such as class attributes, methods, inheritance and association also can be expressed easily. The dynamic behavior of objects within a system is described in OMT dynamic model. This dynamic model specifies the detailed state transition and description. The relationships can be expressed in OMT's functional model.

OMT consists of four phases, which can be performing iteratively.

Analysis: The results are objects and dynamic and functional models.

System design: The results are a structure of the basic architecture of the system along with high-level strategy decisions.

Implementation: The activity produces reusable, extensible and robust code.

OMT separates modeling into three different parts.

- An object model:

Presented by the object model and the data dictionary.

- An dynamic model:

Presented by the state diagrams and event flow diagrams.

- Functional model:


Presented by data flow and constraints.


### The Object model:

It describes the structure of objects in a system, their identity, relationships to other objects, attribute and operations. This model is graphically represented by an object diagram, which contains classes interconnected by association lines. The object diagram contains classes interconnected by association lines. The association lines establish relationships among the classes. The links from the objects or one class to the objects or another class.

The OMT object model of a bank system


The object model of bank system. The boxes represent classes and the field triangle represents specialization.

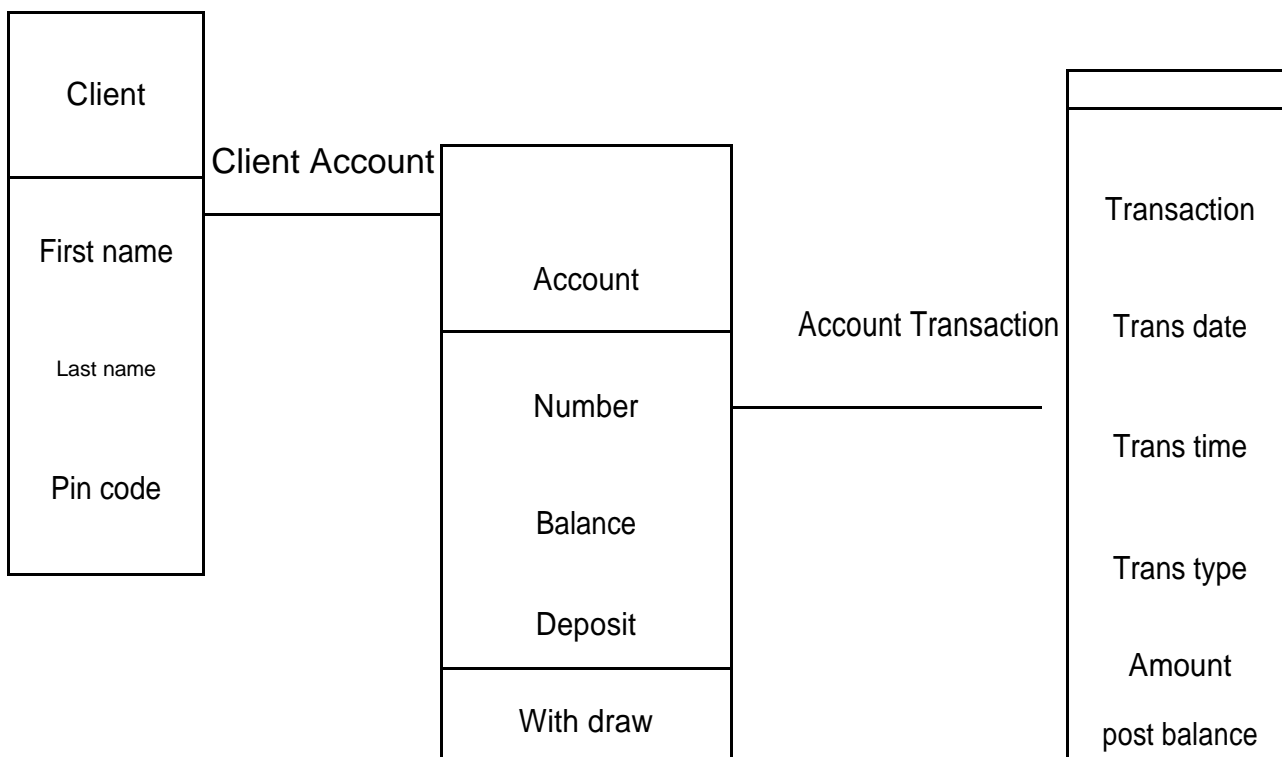

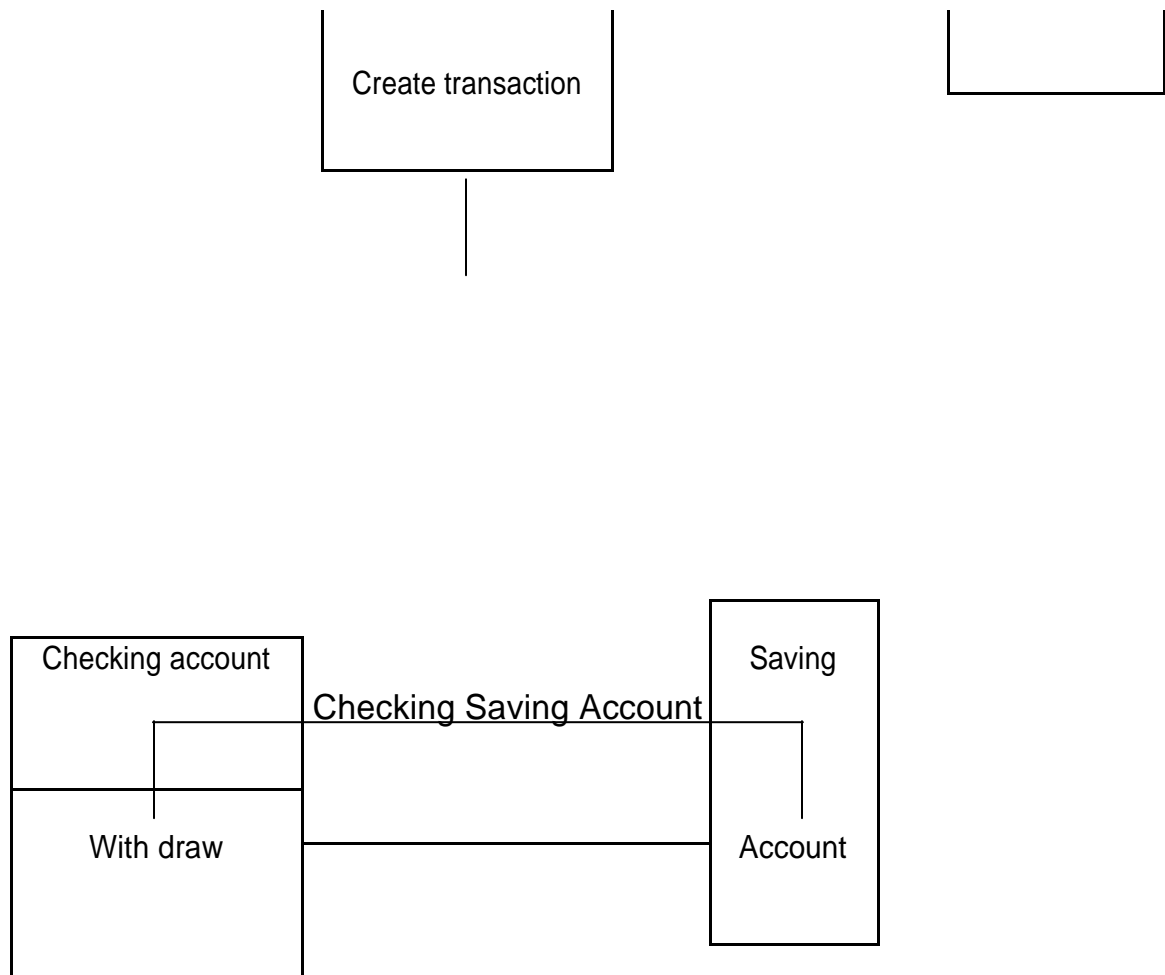

## The OMT dynamic model

OMT provides a detailed and comprehensive dynamic model. The state transition diagram is a network of states, transitions, events, and actions. Each state receives one or more events and the next state depends on the current state as well as the events.

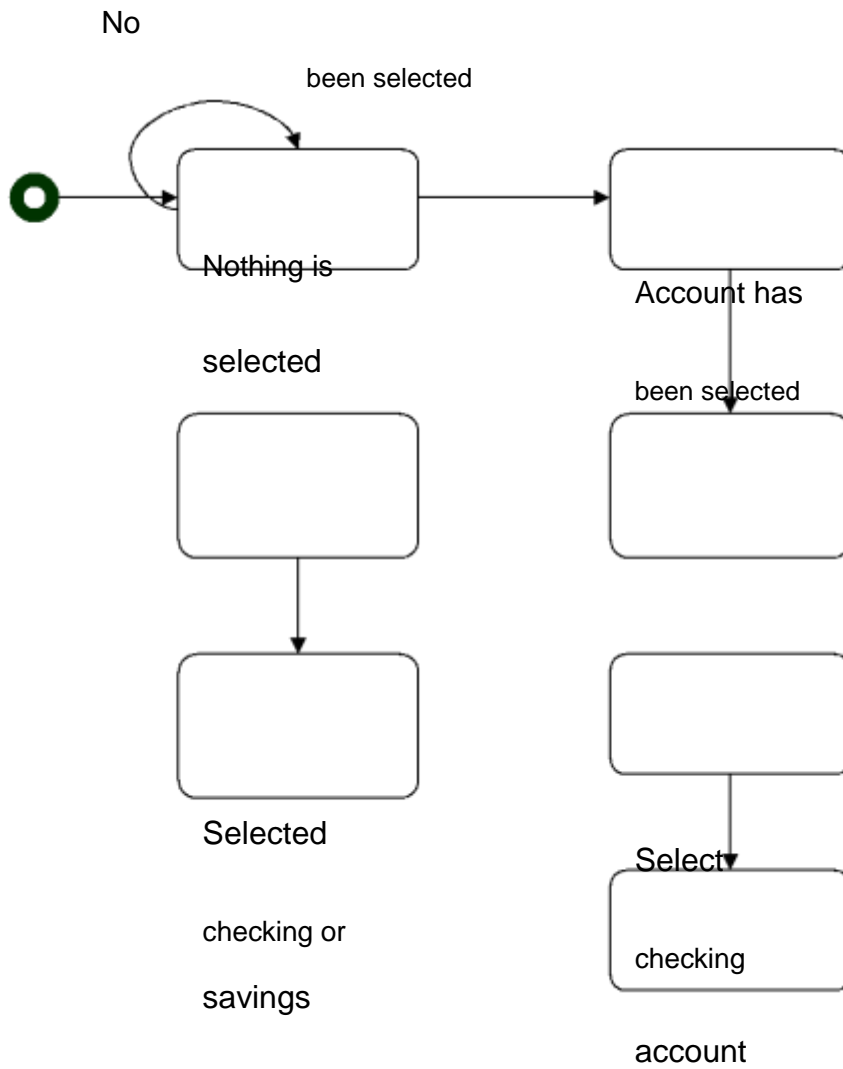

Select  
transaction  
type

Enter the  
amount

Confirmation

## The OMT functional model

The OMT data flow diagram (DFD) shows the flow of data between different processes in a business. An OMT DFD provides a simple and intuitive method for describing business process without focusing on the details of computer systems.

Data flow diagrams use four primary symbols:

Process:

The process is any function being performed. ( ex: verify password or pin in the ATM)



Data flow:

The data flow shows the direction of data element movement.




Data store:


The data store is a location where data is stored. (ex: account in ATM)



External entity:

The external entity is a source or destination of a data element. ( ex:  
ATM card reader)

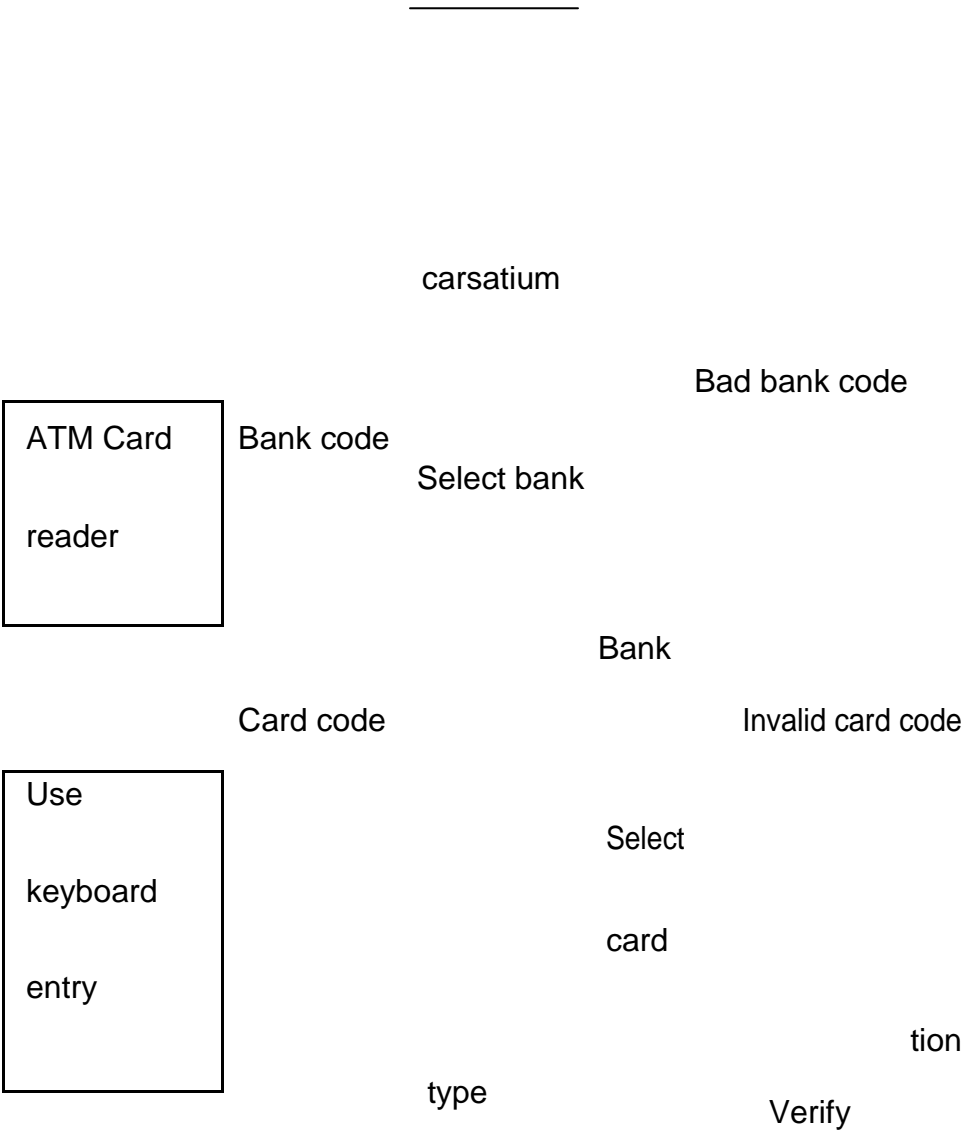

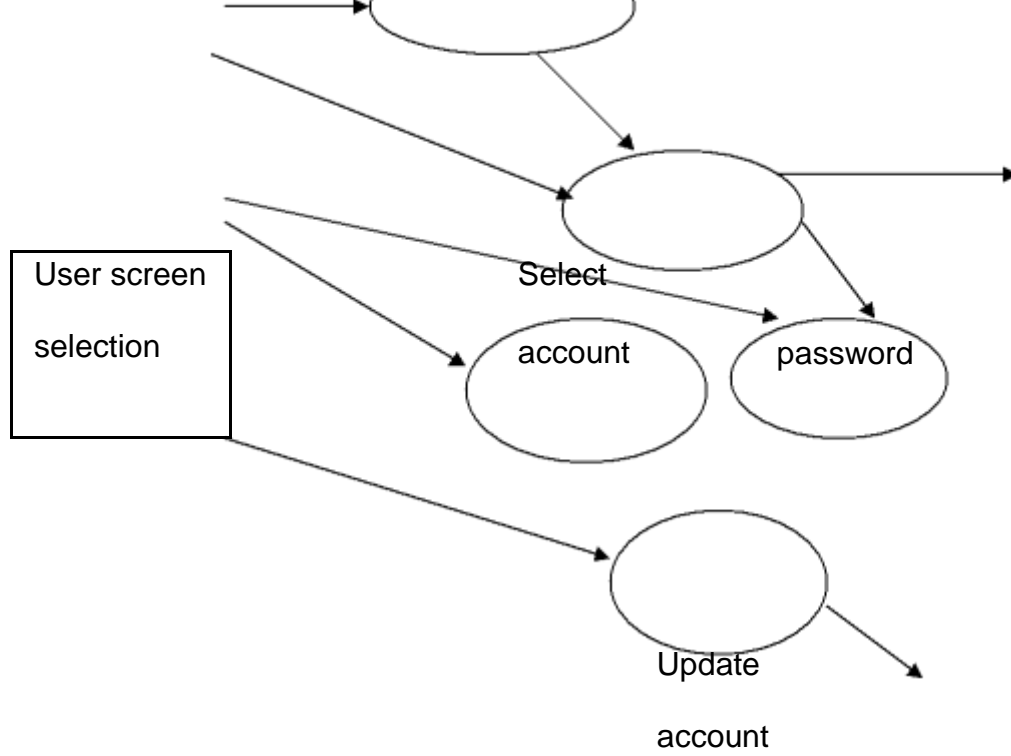

ATM data flow diagram  
system architect

User

The Booch Methodologies:


The Booch Methodologies is a widely used object-oriented method. It helps to design our system using object paradigm. It covers the analysis and design phases of an object-oriented system. Booch uses large set of symbols. We will never use all these symbols and diagrams. We start with class and object diagrams in various steps. The Booch method consists of the following diagrams.

Class Diagrams.  
Object Diagrams.

State Transition Diagrams.  
Module Diagrams

Process Diagrams

Interaction Diagrams.

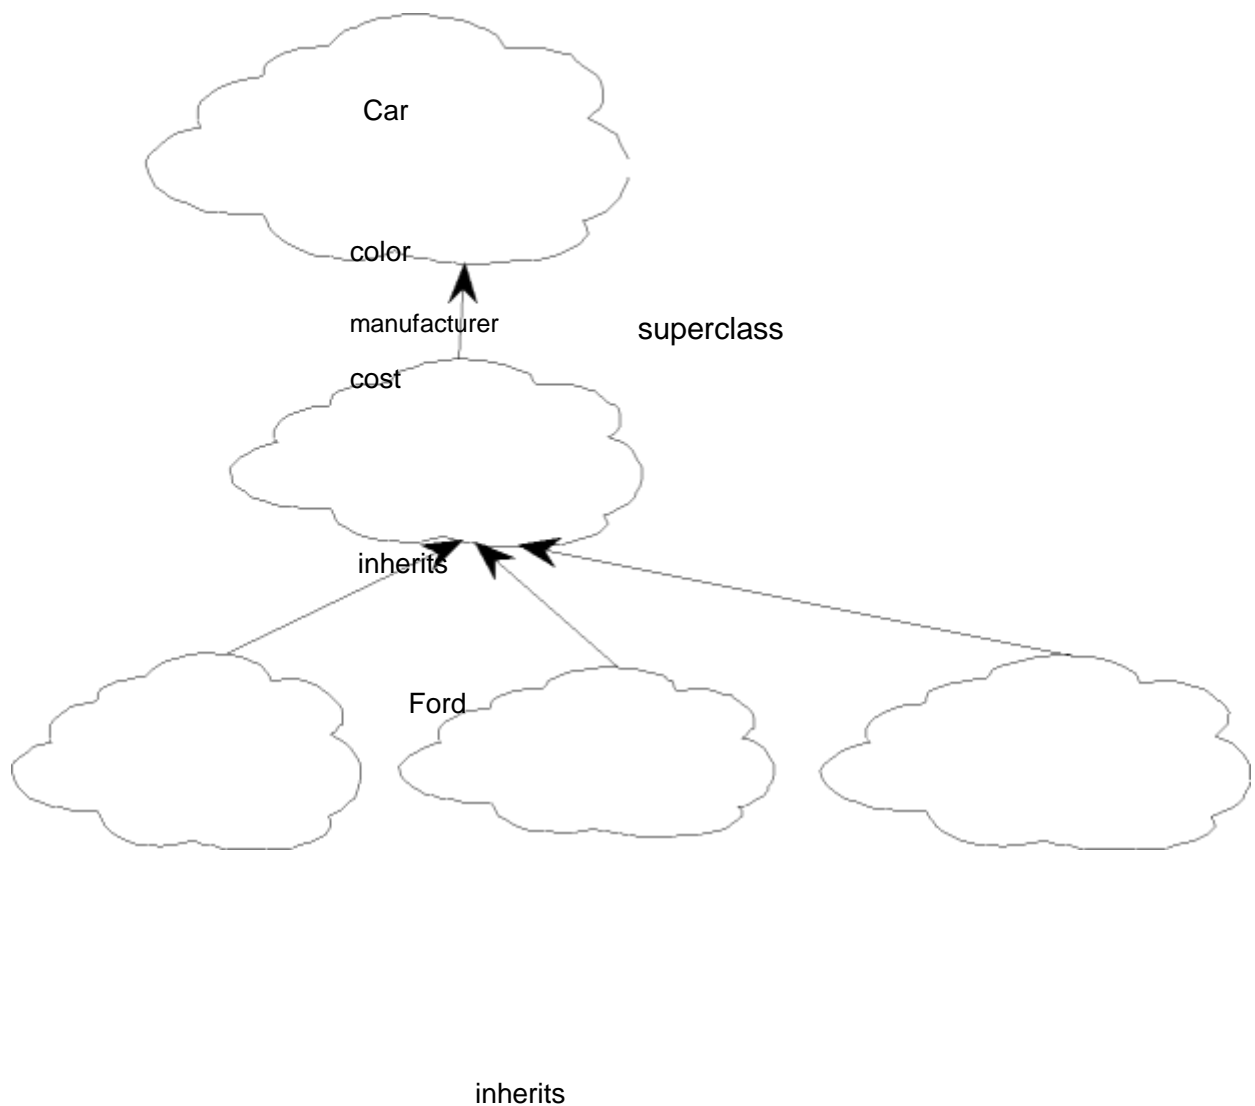

Mustang

Taurus

Escort

### The Macro Development Process:

The macro process serves as a controlling frame work for the micro process and can takes weeks (or) even months. The technical management of the system is interested less in the actual object-oriented design than in how well the project corresponds to the requirements set for it and whether it is produced on time.

The macro development process consists of the following steps. Conceptualization.

Analysis and Development of the Architecture.

Design or Create the System Architecture.  
Evolution or Implementation.

### Conceptualization:

- \* Establish the core requirements of the system.
- \* Establish a set of goals and develop a problem to prove the concept.

### Analysis and Development of the Model:

The class diagrams are used to describe the roles and responsibilities of objects to carry out in performing the desired behavior of the system.

The object diagrams describe the desired behavior of the system in terms of scenarios.

The interaction diagrams are also used to describe the behavior of the system in terms of scenarios.

### Design or Create the System Architecture:

- \* The class diagram is used to decide what classes exist and how they relate to each other.
- \* The object diagrams decide what mechanisms are used to regulate how objects collaborate.
- \* The module diagram used to map out where each class and object should be declared.

\* The module diagram is used to determine which processor to allocate a process. It also determines the schedule for multiple processes on each relevant processor.

Evolution or Implementation:

Produce a stream of software implementation after a successfully refining the system through many iterations.

Maintenance:

Make localized changes to the system to add new requirements and eliminate bugs.

The Micro Development Process:

Each macro development process has its own micro development process. The micro process is a description of the day to day activities by a single (or) small group of software developers.

The micro development process consists of the following steps.

- \* Identify classes and objects.
- \* Identify class and object semantics.
- \* Identify class and object relationships.
- \* Identify class and object interface and implementation.

The Jacobson Methodologies:

The Jacobson methodologies cover the entire life cycle and stress trace ability between the different phases, both forward and backward. This trace ability enables reuse of analysis and design work. The heart of their methodologies is the use-case concept, which evolved with objectory (Object Factory for Software Development)

Object-oriented Business Engineering (OOBE)

Object-Oriented Software Engineering (OOSE)

The Booch methodology prescribes a macro development and micro development process.

Use Cases

Use cases are scenarios for understanding system requirements. A use case is an interaction between users and a system.


The use-case model captures the goal of the user and the responsibility of the system to its users

The use case description must contain:

How and when the use case begins and ends.

The interaction between the use case and its actors, including when the interaction occurs and what is exchanged.

How and when the use case will store data in the system. Exceptions to the flow of events.

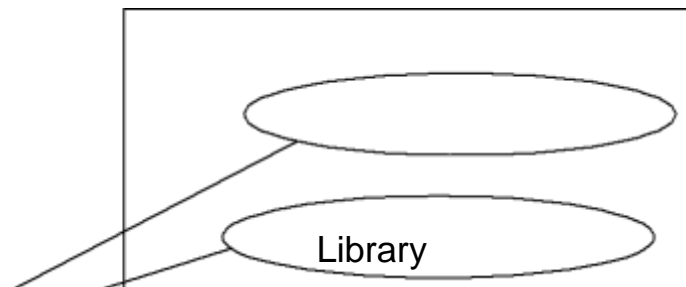

Checking out books

Getting an

Interlibrary loan

## Object-Oriented Software Engineering: Objectory

Object-oriented software engineering (OOSE), also called Objectory, is a method of object-oriented development with the specific aim to fit the development of large, real-time systems.

Objectory is built around several different models:


- Use case model.

- Domain object model.

- Analysis object model.

- Implementation  
model. Test model.

# Use-case model

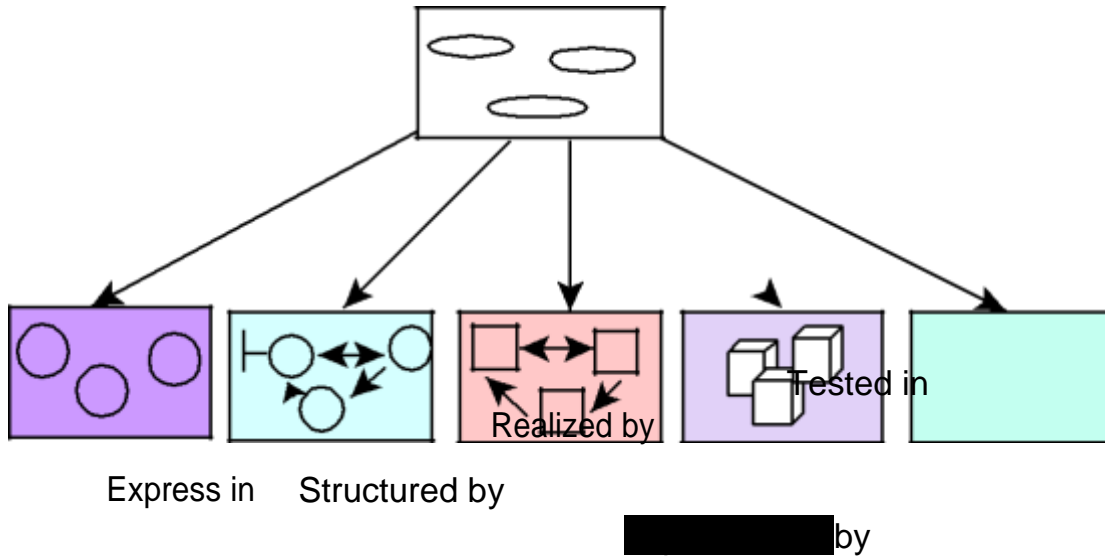

OK

NOT OK

Domain Object	Analysis	Design model	Implementation	Testing model
Model	Model		Model	

Use case model.

The use case model defines the outside (actors) and inside (use case) of the system behavior.

Domain object model.

The objects of the real world are mapped into the domain object model.

Analysis object model.

The analysis object model presents how the source code should be carried out and written.

Implementation model.

The implementation model represents the implementation of the system.

Test model

The test model constitutes the test plans, specifications, and reports.

Object-Oriented Business Engineering (OOBE)

Object-oriented business engineering (OOBE) is object modeling at the enterprise level.

Use cases again are the central vehicle for modeling, providing traceability throughout the software engineering processes.

OOBE consists of:

Analysis  
phase Design

## Implementation phases and Testing phase.

### Analysis phase

The analysis phase defines the system to be built in terms of the problem-domain object model, the requirements model, and the analysis model. The analysis process is iterative but the requirements and analysis models should be stable before moving to subsequent models.

### Design and Implementation phases

The implementation environment must be identified for the design model. The analysis objects are translated into design objects that fit the current implementation.

### Testing phase.

There are several levels of testing and techniques. The levels include unit testing, integration testing, and system testing.

### Patterns

A pattern is instructive information that captures the essential structure and insight of a successful family of proven solutions to a recurring problem that arises within a certain context and system of forces.

The main idea behind using patterns is to provide documentation to help categorize and communicate about solutions to recurring problems.

The pattern has a name to facilitate discussion and the information it represents.

A good pattern will do the following:

It solves a problem.

Patterns capture solutions, not just abstract principles or strategies.

It is a proven concept.

Patterns capture solutions with a track record, not theories or speculation.

The solution is not obvious.

The best patterns generate a solution to a problem indirectly—a necessary approach for the most difficult problems of design.

It describes a relationship.

Patterns do not just describe modules, but describe deeper system structures and mechanisms.

The pattern has a significant human component.

All software serves human comfort or quality of life; the best patterns explicitly appeal to aesthetics and utility.

Generative Patterns:

Patterns that suggest the way of finding the solution

Non Generative patterns:

They do not suggest instead they give a passive solution. Non Generative patterns cannot be used in the entire situation.

## Patterns template

There are different pattern templates are available which will represent a pattern. It is generally agreed that a pattern should contain certain following components.

**Name**    A meaningful name.

**Problem**    A statement of the problem that describes its intent.

**Context** The preconditions under which the problem and its solution seem to recur and for which the solution is desirable. This tells us the pattern's applicability.

**Forces** constraints and conflicts with one another with the goals which we wish to achieve.

**Solution**    solution makes the pattern come alive.

**Examples**    sample implementation

Resulting context describes the post conditions and side effects of the pattern.

Rationale justifying explanation of steps or rules in the pattern. This tells how the pattern actually works, why it works and why it is good.

Related patterns. The static and dynamic relationships between these patterns and others with in the same pattern language or system.

Known uses The known occurrences of the pattern and its application within existing systems.

## Anti patterns

A pattern represents a best practice whereas an anti pattern represents worst practice or a lesson learned.

Anti patterns come in two varieties:

Those describing a bad solution to a problem that resulted in a bad situation

Those describing how to get out of a bad situation and how to proceed from there to a good solution.

## Capturing Patterns

Guidelines for capturing patterns:

Focus on practicability.

Aggressive disregard of originality.  
Nonanonymous review.

Writers' workshops instead of presentations. Careful editing.

## Frameworks:

Frameworks are the way of delivering application development patterns to support/share best development practice during application development.

In general framework is a generic solution to a problem that can be applied to all levels of development. Design and Software frameworks are most popular where Design pattern helps on Design phase and software frameworks help in Component Based Development phase.

Framework groups a set of classes which are either concrete or abstract. This group can be subclassed into a particular application and recomposing the necessary items.

- d. Frameworks can be inserted into a code where a design pattern cannot be inserted. To include a design pattern the implementation of the design pattern is used.

- e. Design patterns are instructive information; hence they are less in space where Frameworks are large in size because they contain many design patterns.
- f. Frameworks are more particular about the application domain where design patterns are less specified about the application domain.

Note:

Include the details of Microsoft .Net development framework.

## Differences Between Design Patterns and Frameworks

Design patterns are more abstract than frameworks.

Design patterns are smaller architectural elements than frameworks.  
Design patterns are less specialized than frameworks.

## Object Oriented Methodologies

There are different methods for modeling object oriented systems. Each methodology can represent same model with varying documentation style, Modeling language and notations.

### 1. Rumbaugh's Object Modeling Technique

- The system can be modeled with the help of 3 different models
  1. Object Model
  2. Dynamic Model
  3. Functional Model
- These models are related to different phases as they are the outcome of each phase.
- In analysis phase less detailed [more abstract] representation of object, dynamic and functional model are used.

- In system design phase Architectural diagram is drawn that represents blocks and relations.
- In object design the models generated during analysis phase are refined.
- In implementation phase reusable robust code is generated from the design.
- Object Model:
  - It's an object diagram containing interrelated objects.
  - Objects are represented by object notation and it contains Name, Behavior and attributes.
  - Association lines represent the relationship between the objects.


One – to – One relationship is one in which an object uses only one object at the other end. [Represented by straight line].

One – to – Many relationship is one in which an object at one end uses many objects at the other end. [Represented by bubbled line].

Specialized relationship [Inheritance] – is one in which the one object is a type of other object. [Represented by filled triangle].

Do

course

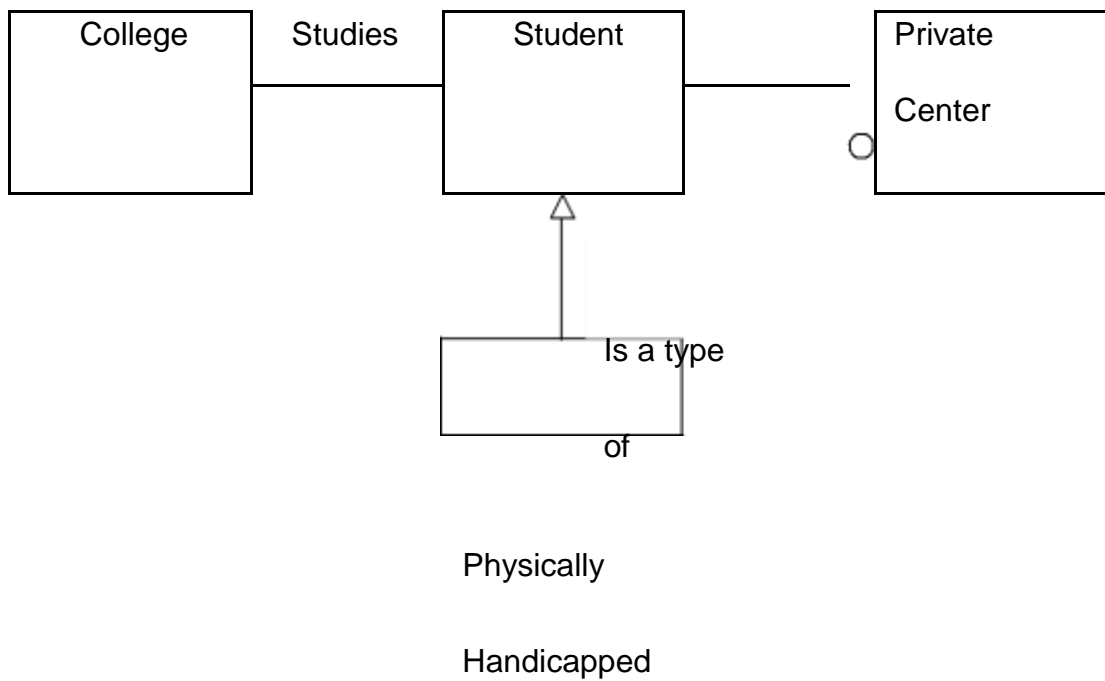


- In the above example there exist an one to one relationship between student and college as a student studies in a college at a time
- There exists one to much relationship between student and private computer center coz a student can courses in more than one private center.
- Physically handicapped student is a type of student [generalization].

- Dynamic Model

- Represents a set of states possessed by the system.
- Interconnected lines represent the transition between the states.
- The system performs some activity when it is in a state.
- One or more event may occur in a state and the system may undergo transition from one state to the other state based on the event.
- State transition can be triggered by an event or completion of an activity.
- Hence next state depends on the current state and event.



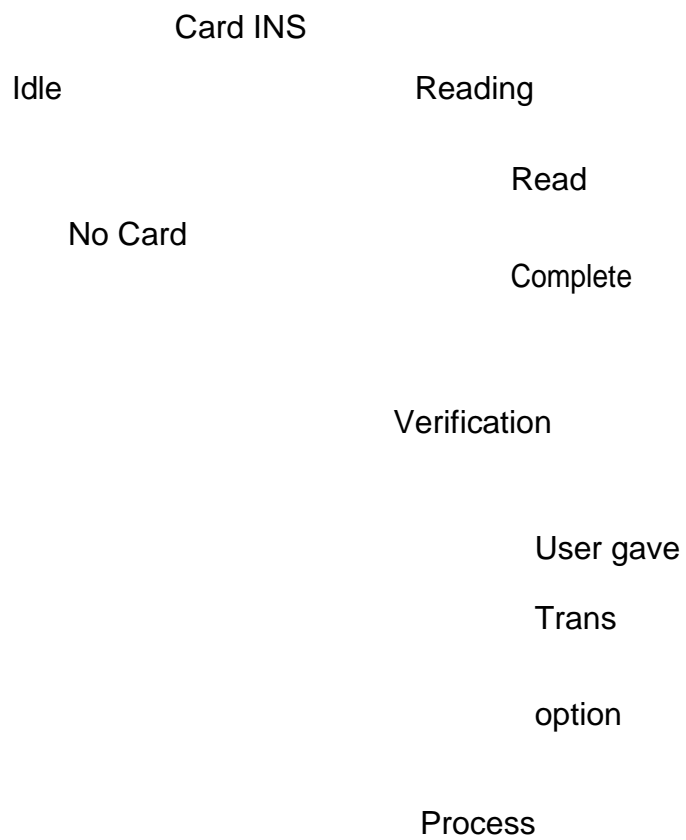

- The above diagram shows the different states of an ATM machine.

- The system remains in idle state until the user inserts card when user inserts card the system goes to Reading state and once it's completed the system goes to verification state and prompt for process choice option.
  - The system goes to Process state when the user gives the option for transaction.
- 
- Functional Model [Data Flow Diagram]
    - Represents flow of data between various functional blocks of the system.
    - A functional model may be an external device, process or a Data store.
    - Functional blocks are connected by labeled line that represents flow of data between various functional models.

PIN Reader/ Choice

---

Scanner

Digital  
Camera

Image

PIN Wise

Status

C  
o  
e

PIN/Choice

Process

PIN

W  
i  
s  
e

Account wise

Choice

Barcode

Process

Bar Code

Process

Trans

S  
t  
a  
t  
u

- The above diagram represents the flow of data between various functional blocks.
- The external devices/entities are represented in a rectangular box
- The Process is represented in a oval shape which performs a particular functionality.
- The Data Store [Information Storage] is represented inside a parallel line.
- Labeled arrows represent direction of flow of data and the date itself.

m  
a  
g  
e

W  
i  
s  
e

Image


Process

## 2. The Booch Methodology

- Booch provides a technique for creating more informative model.
- This approach provides a large set of notations so that a complete model can be built during the analysis and design phase.
- Booch gave equal importance to process [Management Aspect] and diagrams [Technical].
- Diagrams introduced by Booch are
  1. Class Diagram
  2. State Transition Diagram
  3. Module Diagram
  4. Process Diagram
  5. Interaction Diagram
- Booch define process in terms of Macro Process and Micro Process.
- Diagrams:
  - Class Diagram
    - Represents a set of interrelated classes.

This diagram shows the existence of various classes and logical relation between them.






General Notation for a class

Association


Inheritance



Has

using

- Association can be quantified with the help of Cardinality.

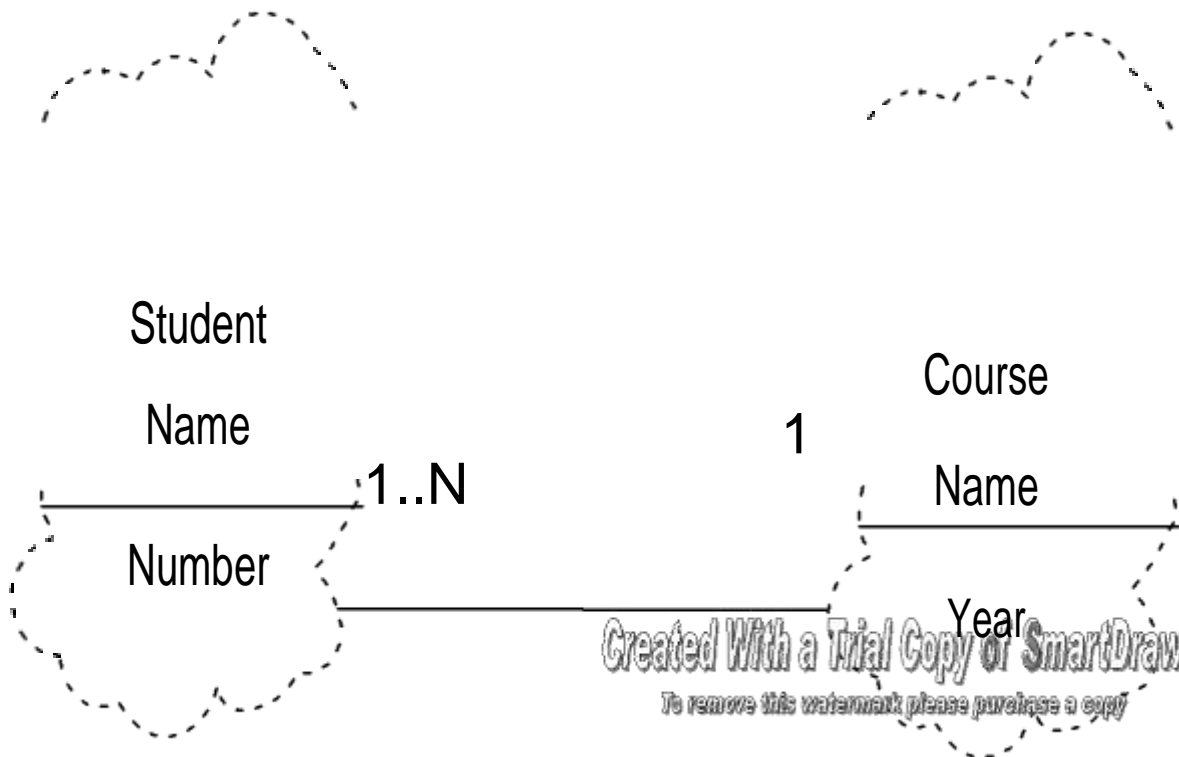

The above class diagram represents the association between student class and Course class. The cardinality says that each student can attend one course and each course can have any number of students.


Note: For 16 marks question convert all the UML diagrams in to Booch diagrams.

#### ○ Interaction Diagram

An interaction diagram is used to trace the execution scenario in the same context as an object diagram.

Interaction diagram includes objects involved in the sequence of communication.

The interaction diagram represents the sequence of message passing among related objects.

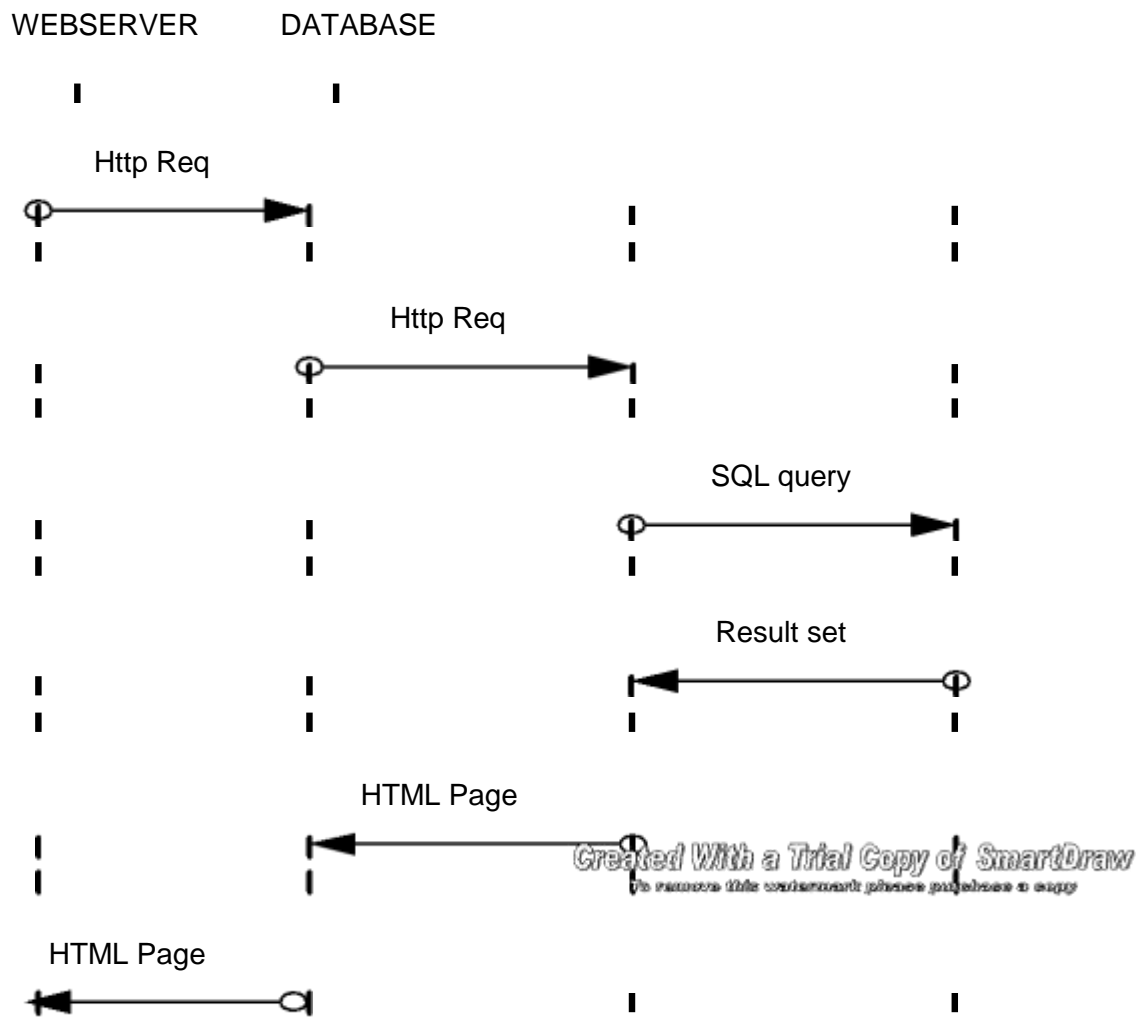

The above interaction diagram represents the sequence of message passing between various objects.

[Note: Explain the sequence]


- Module Diagram

Module diagram is used to show the allocation of classes and objects to modules in the physical design of the system.

A single module diagram represents the view of module structure of the system.

These diagrams are used to indicate the physical layering of the system during architectural design.

Module diagram contains modules and dependencies. Dependencies are represented by straight line.

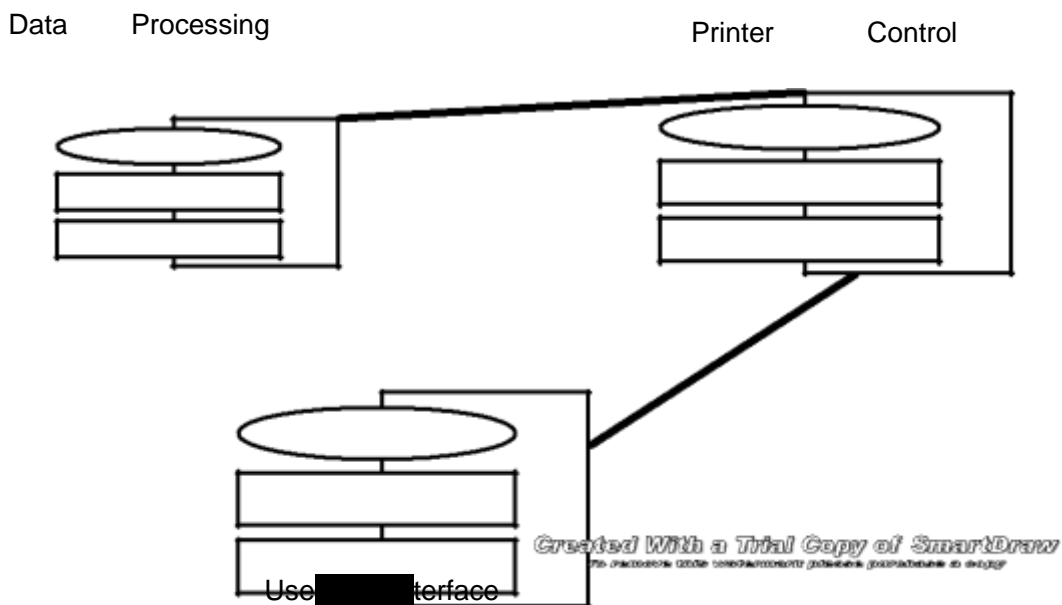

- State Transition Diagram


State transition diagrams represent the different states of the machine as whole or different states of an object.

The states are named and represented in a state icon.

Various transitions between states are represented by directed line with the event and result.

This labeled line says that when that particular event occurs the machine undergoes transition from one to another state.

No card Insterted/ waitfor card()

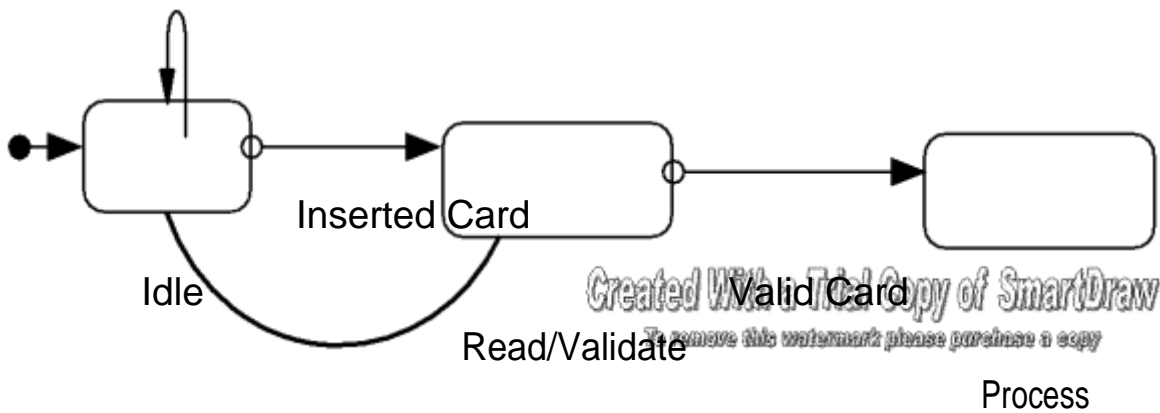


invalid card

#### ○ Process Diagram

Process Diagram is used to show the allocation of process to processors in the physical design of the system.

The process diagram is used to indicate the physical collection of processors and devices.

The processor is represented by cube with shaded sides and device is represented by a cube.

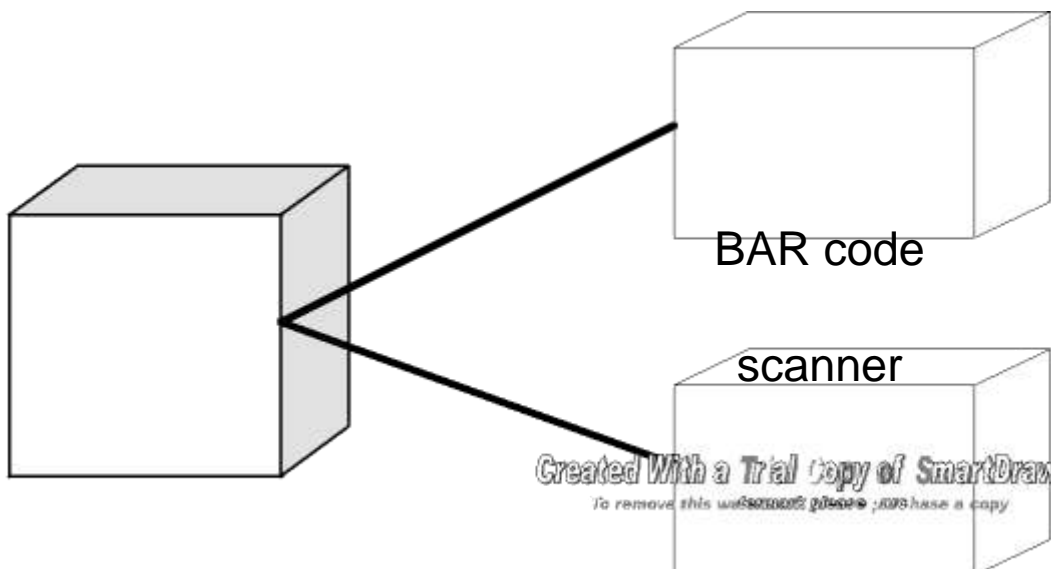

Validatorq

TDigital S

T a r g e t A n a l y s i s w o r k s h o p

- The Process – Booch gave the concept of Macro process and Micro Process. It highlights the management aspect.
  - The Macro Development Process – Concerns about the management aspect of the system. The entire process is composed of a set of Macro Development Process. The set of Macro process are

Conceptualization – core requirement of the system

Analysis and Development of the Model – Trace the use of the software, actors, what the system should do.

Design and Create System Arch. – Set of interconnected classes with detailed representation of properties and behavior. Various modules that exist from OO decomposition are represented.

Evolution or Implementation – After successful iterations of previous steps the representation is implemented in programming languages.

Maintenance – It is carried out to make changes needed after the release because of new requirements.

- The Micro Development Process – It represents the set of minute activities that belongs to a Macro Development Process. In detail the Micro development process represents the minute set of activities carried out by a programmer or group of programmers.


- The steps involved are

- Identify classes and objects
  - Identify class and semantics
  - Identify class and relationship

- Identify class, object interfaces and implementation

## 2. The Jacobson Methodology

- Jacobson and team came with the concept of Object Oriented Software Engineering and Object Oriented Business Engineering which covers the entire project life cycle.
- Use Case is introduced by this team and later it is adopted in UML.
- Use Case diagram captures the complete requirements of the user and is used in almost all the phases of the software development.
- Use Case represents the interaction between the actor and the system.

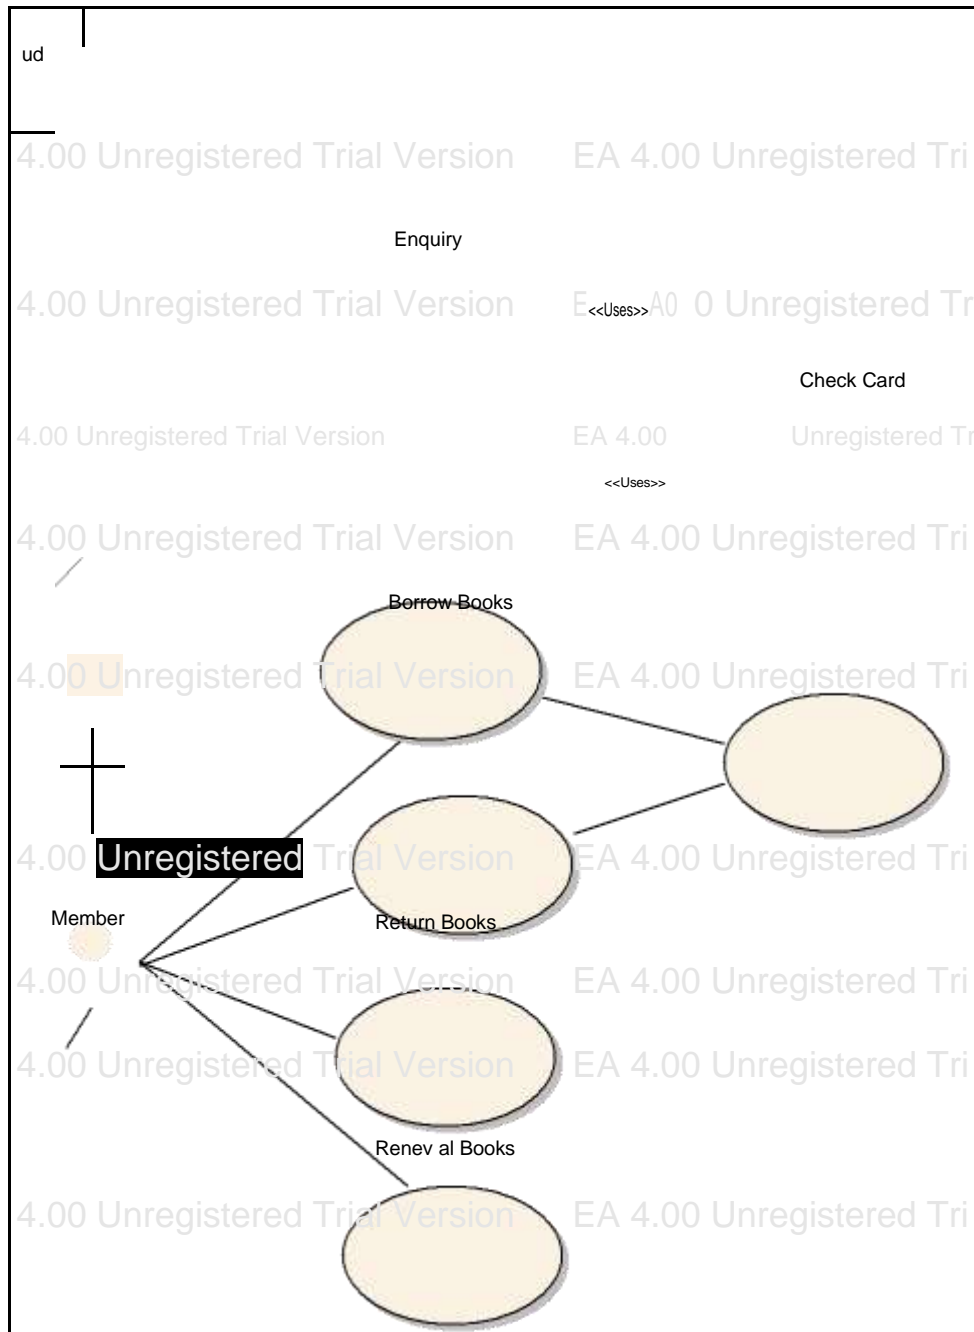

- Use Case diagram contains a set of use case where a single use case represents a flow of events.
- There exist <<extends>> and <<uses>> relationships between the various use cases.
- If a use case extends a particular use case the derived case does some functionality more than the base use case.
- The relation between two use cases is said to be <<uses>> if one use case invokes the used one whenever needed.

- In the above example the Member (actor) may borrow books or return books in a library.
- In both the cases the card should be checked and redundancy can be eliminated by establishing uses relationship.
- An use case is said to be concrete if that particular case is initiated by the actor where a abstract use case is one which is not initiated by the actor.
- Object Oriented Business Engineering is a variant of Object Oriented Software Engineering.
- Various model specified by Jacobson are
  - Use Case Model – Needs of the user.
  - Domain Object Model – mapped real world objects.
  - Analysis Model – represents what should be done and how should be done to the customer to satisfy them
  - Implementation Model – represents the runtime representation of the system.
  - Test Model – represents the test plan, specifications and the report.

# UML

## (Unified Modeling Language)

Model Represents an abstract of the system. It is build prior to the original system. It can be used to make a study on the system and also can be used to analyze the effect of changes on the system. Models are used in all disciplines of engineering.

Static Model    Represents the static structure of the system. Static models are stable and they don't change over time.

E.g. Class diagram.

Dynamic Model    Collection of diagrams that represents the behavior of the system over time.

It shows the interaction between various objects over time.

E.g. Interaction Diagram.

A model includes

- a) Model Elements – Fundamental modeling concepts and semantics.
- b) Notation – Visual rendering of model elements.
- c) Guidelines – Expression of usage.

Technique of creating models. It is also a good medium of communication between developers at various levels.

- Clarity – Visual representations are more clear and informative than listed or written documents. Missed out details can be easily found out.
- Familiarity – Similar modeling language and techniques is followed by developers working in same domain.
- Maintenance – Changes can be made easily in visual systems and changes can be confirmed easily.
- Simplification – More complex structures can be represented in an abstract manner to deliver the conceptual idea.

Unified Modeling Language:

It's a language for modeling software systems. This language is used for specifying, visualizing, constructing and documenting software systems through out the development. (Mostly object oriented development).UML is used to model systems build through Unified Approach. Unified Approach combines the methodologies of Booch, Rumbaugh and Jacobson.

Models can be represented at different levels based on the abstraction and refinement. A complete model can be obtained only after continuous refinement of UML diagrams. UML is composed of 9 graphical diagrams:

- 1) Class Diagram
- 2) Use – Case Diagram
- 3) Behavior Diagram
  - a. Interaction Diagram
    - i. Sequence Diagram
    - ii. Collaboration Diagram
  - b. State Chart Diagram
  - c. Activity Diagram
- 4) Implementation Diagram
  - a. Component Diagram
  - b. Deployment Diagram

### UML Class Diagram:

Class diagram represents the types of objects in the system and the various kinds of static relationships that exist between them. Class diagrams are used in object modeling where real world objects are mapped to logical objects in computer program. Notations and symbols used in Class diagrams are

- 1) Class Notation

- 2) Object Diagram
- 3) Class Interface Notation
- 4) Binary Association Notation and Association Role
- 5) Qualifier
- 6) Multiplicity
- 7) OR Association
- 8) Association Class
- 9) N – ARY Association
- 10) Aggregation and Composition

## 11) Generalization


### 1) Class Notation:

Classes are represented in a rectangular box. The top box has the name, the middle one

has the attributes/properties/data members and the lower one has the behavior/ member functions/ methods. A Box with a class name represents the most abstract representation of a

class.

E.g.

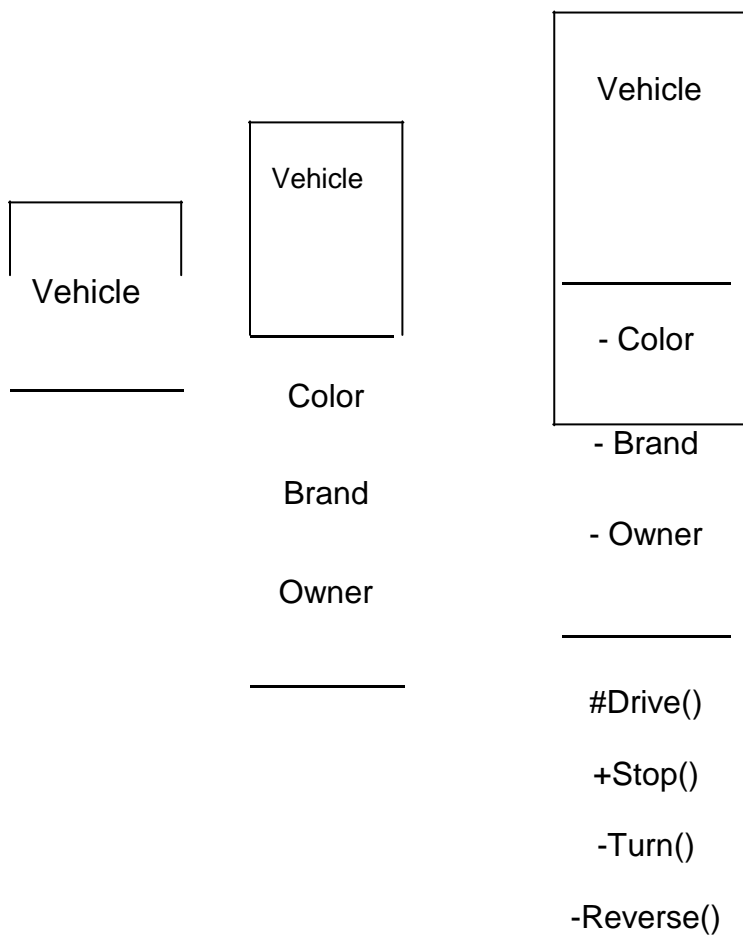

All the above diagrams represent the same class in different levels of abstraction.


Visibility of members can be specified using -, + and # symbols.

- indicates a private member
- + indicates a public member
- # indicates a protected member.

## 2) Object Diagram:


Object diagram is an instance of a class diagram. It gives a detailed state of a system at a particular point of time. Class diagrams can contain objects and Object diagram cannot contain classes. Hence Class diagram with objects and no classes is called an object diagram.

## 3) Class

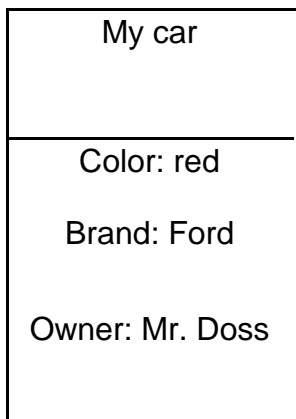


It represents the externally visible behavior of a class. Externally visible behaviors are public members. The notation is small circle with a line connected to a class.

Print



#### 4) Binary Association Notation and association role:

It represents the association between two classes represented by a straight line connecting 2 classes. Association has got a name written on the line and association role

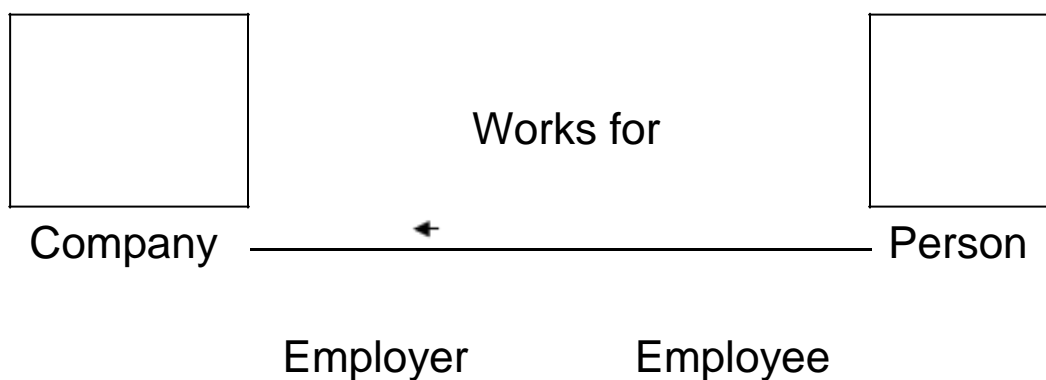



In the above diagram Works for is the association that exist between Person and Company. The arrow mark indicates the direction of association. i.e., The Person Works for the company.

Association Role: it's related to association. Each class that is a member of an association plays a role in the association called association role. E.g. The person plays the role of EMPLOYEE in the WORKS FOR association where a company plays the role of EMPLOYER.

#### 5) Qualifier:

Qualifier is an attribute of an association. It makes the association more clear.

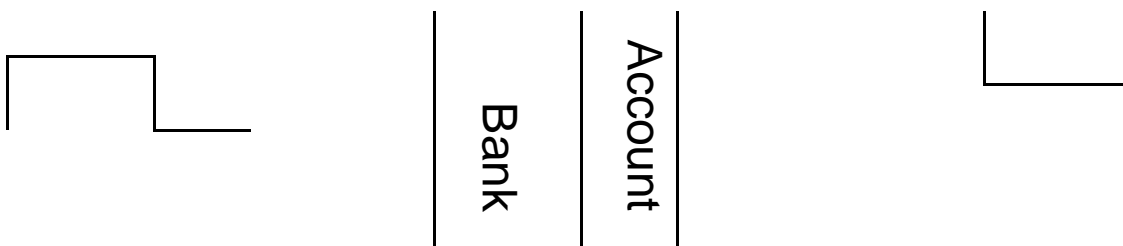

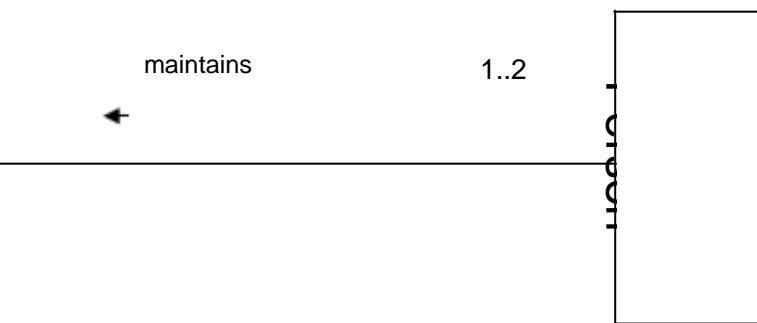

The qualifier here is the account and it defines that each instance of account is related to 1 or 2 person. Hence the account qualifies the association maintains.

#### 6) Multiplicity:


It gives the range of associated classes. It is specified of the form lower bound..upper bound or integer. Lower bound must be an integer where upper bound can be an integer or a \*. \* Denotes many.

When a multiplicity is stated at one end it states that each class at the other end can have relation with stated number of classes at the nearer end.

E.g:


The below diagrams says that each course can have any number of students OR each student may attend any number of courses.

Also each department has one or more courses and a course may belong to one or more departments.

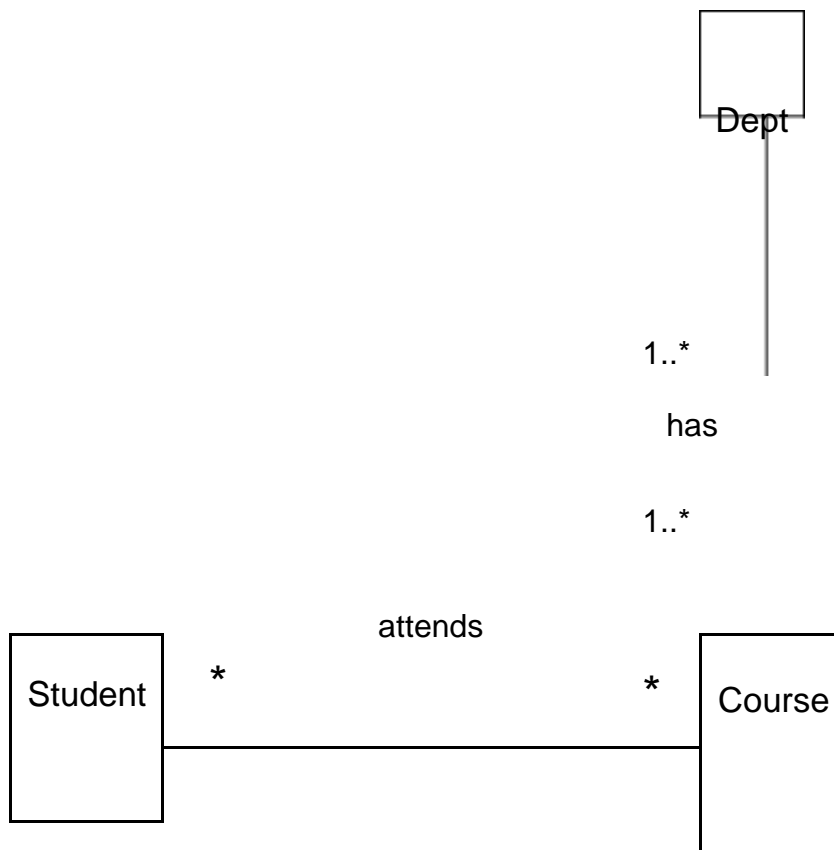


## 7) OR – Association:

It's a relation in which a class is associated to more than one class and only one association is instantiated at any instance of time for an object. It is represented by a dashed line connecting two associations. A constraint string can be used to label the OR association line.

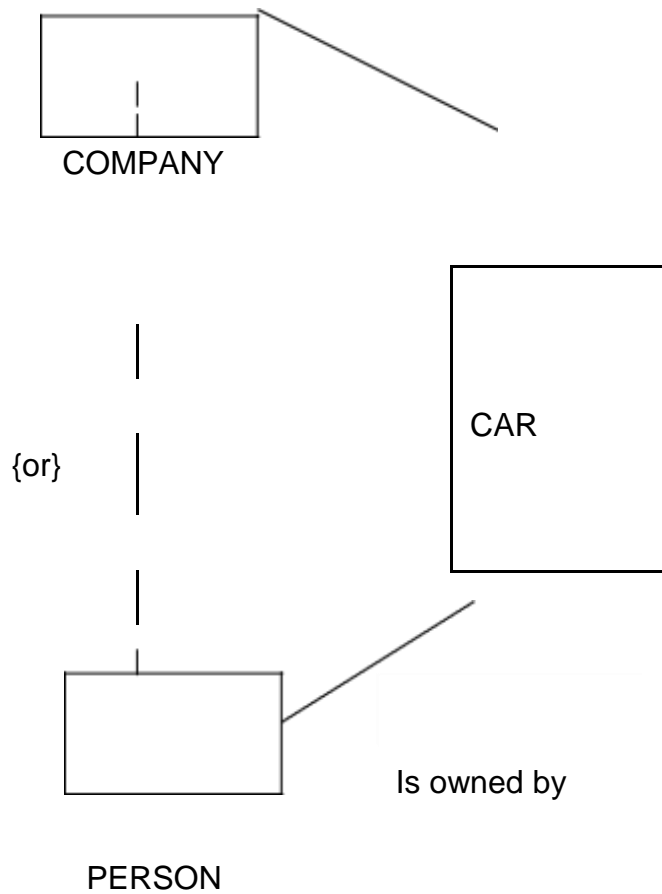

## 8) Association Class:

It's an association that has class properties. The association class is attached to an association with a dashed line

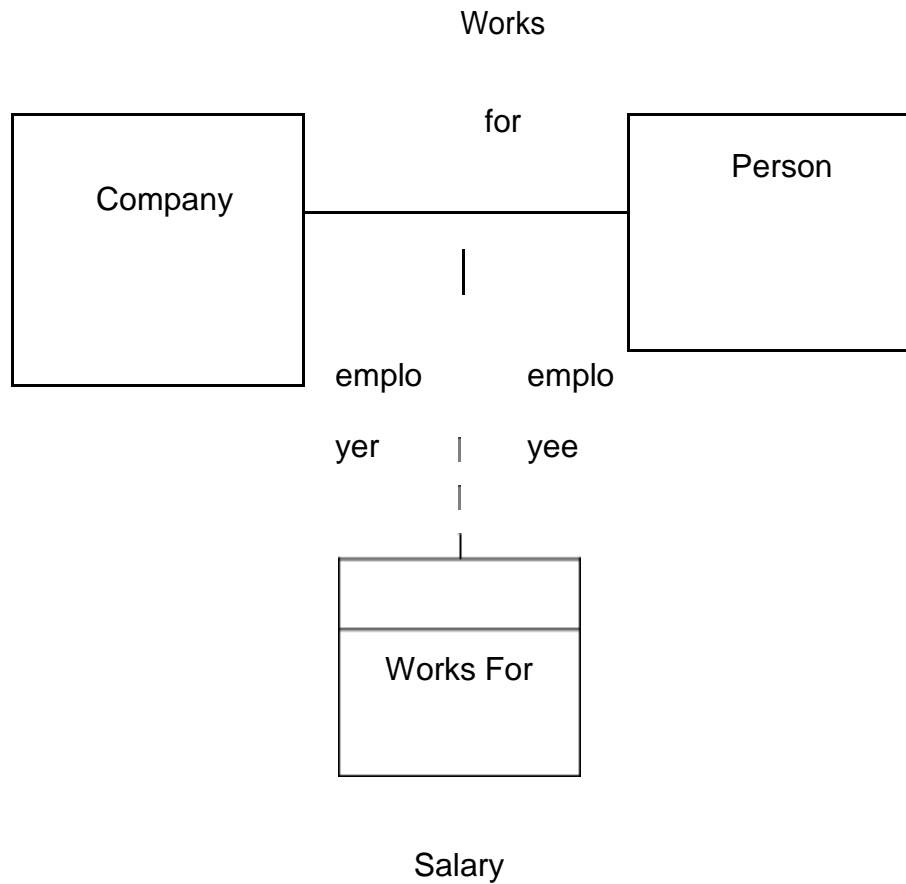


Here the works for relation has got one attribute salary. Hence an association class is maintained.

## 9) N – Ary Association:

It's an association where more classes participate. They are connected by a big diamond

and the name of the association is named near the line

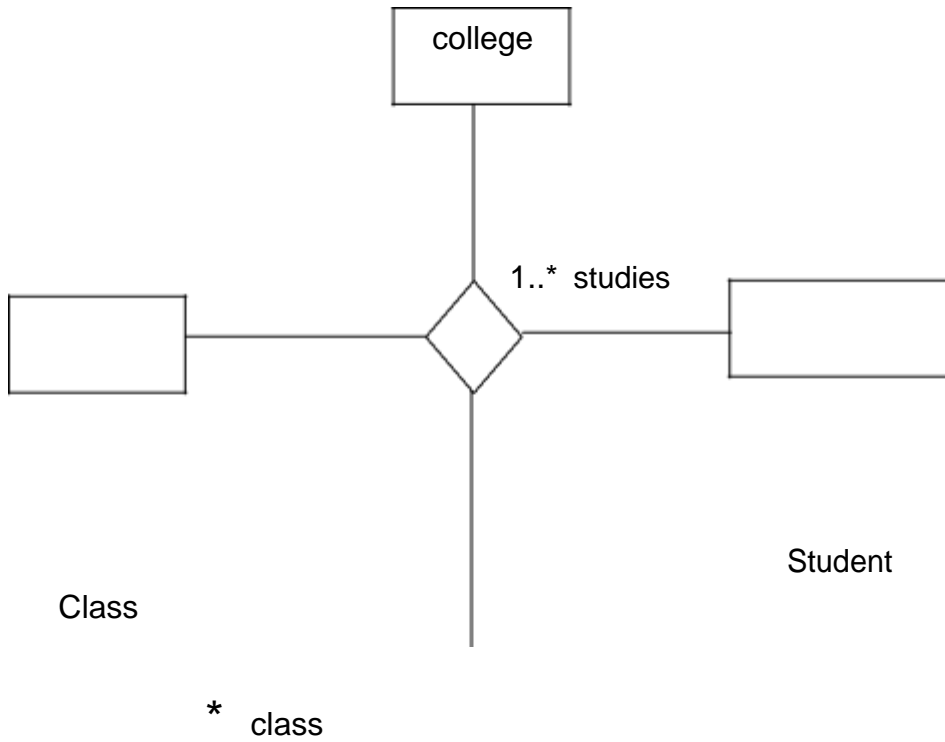

Mark  
Sem  
Mark[8]  
avg



## 10) Aggregation and Composition:


Aggregation is a 'part – of' association. Containment is a type of aggregation with weak ownership where composition is a part of relationship with strong owner ship.

For E.g

A Car consist of Engine, Door, light etc..  
[Composition] A Car contains a Bag [Containment]

Containment is represented by a line with hollow diamond arrow at the end where a  
Composition is represented by filled diamond at the end.

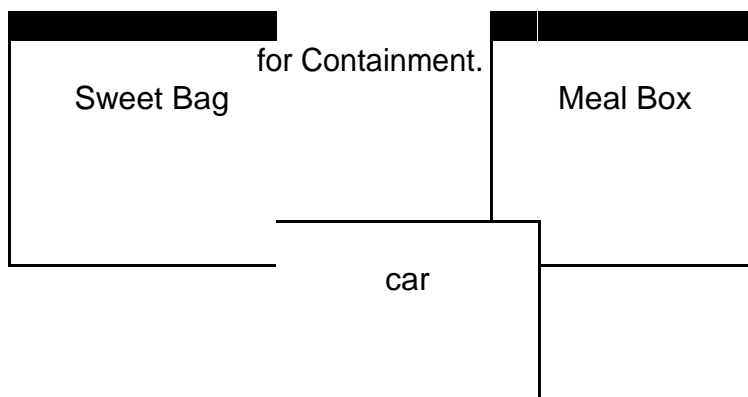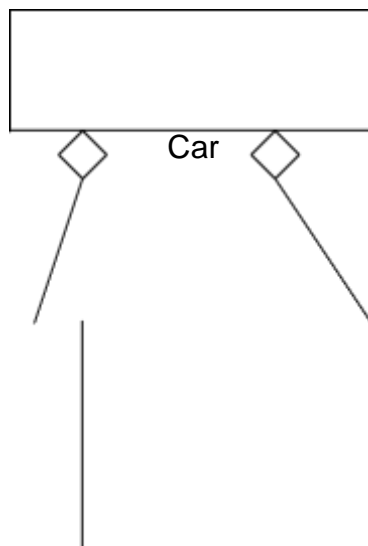

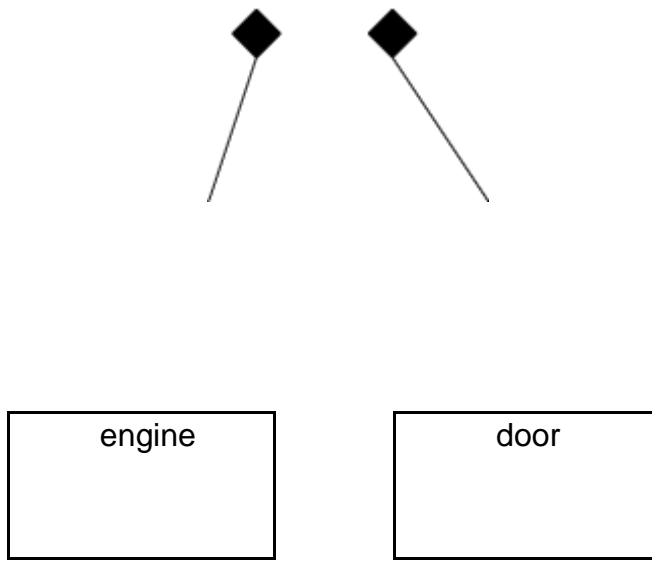


This is an example for Containment.

## 12) Generalization:

It is a relationship between more general and specific classes. It's represented by a directed line with a hollow arrow head. Some diagrams specify incomplete number of subclasses. It can be represented by ellipses.

... in the example diagram specifies that there are some more sub classes of CAR class are available and they are not mentioned.

E.g.

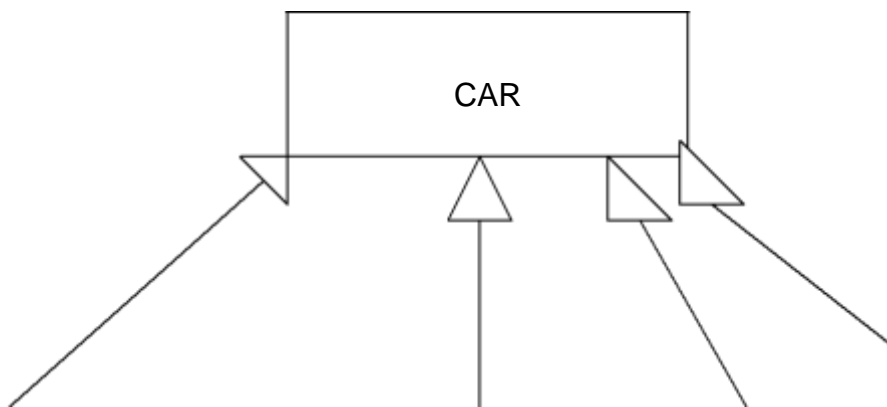

Benz

Ford

Maruthi

...

EXAMPLE FOR A CLASS DIAGRAM:

cd

0      Unregistered Trial Version EA 4.00 Unregistered

ShopCart

Customer

-   SubT otal: int

0

Version EA4

Name:

-   Salestax:

-   addressToBill: int

-   Total: int

\*

1

-   addressToShip: int

0

Version EA 4

-   emailAddress: int

+   placeOrder() : void

-   creditRating: int

+   CancelOrder() : void

1

1

0

Unregistered Trial Version EA 4.00 Unregistered

0

Unregistered Trial Version EA 4.00 Unregistered

1

0

Unregistered Trial Version EA 4.00 Unregistered

CreditCard

-

0 Unregistered

Issuer:

4.

PreferredCustomer

-   Number: int

-   ExpirationDate: int

-   Discount%:

\*

1

0 Unregistered

4.

+   AuthoriseCharge() : void

0

Unregistered Trial Version EA 4.00 Unregistered

0


Unregistered Trial Version EA 4.00 Unregistered

\*

0

Unregistered Trial Version EA 4.00 Unregistered

ItemsToPurchase

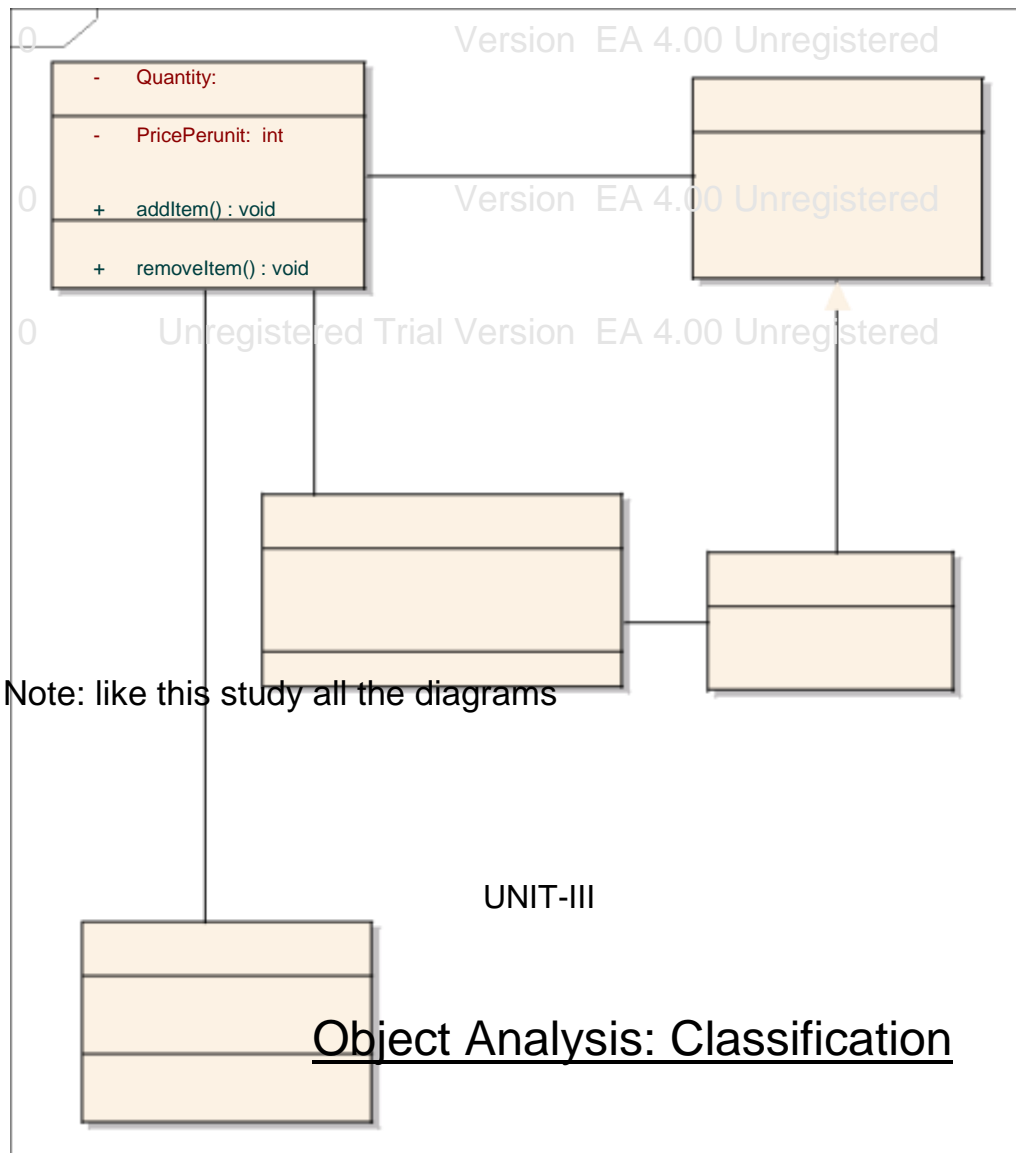

## Classification:

It's the technique of identifying the class of an object rather than individual objects. In other words it's the process of checking whether the object belong to particular category or not.

## Classification Theory:

Many persons introduced many theories for classification.

1. Booch: Classification guides us in making good decisions for modularization using the property of sameness. The identified classes can be placed in same module or in different module based on the sameness. Sameness/ Similarity can be measured with coupling and cohesion. Cohesion is the measure of dependency between the classes/packages/components in a module where coupling is the measure of dependency between different modules. In real software development prefers weak coupling and strong cohesion.
2. Martin and Odell: Classification can be used for well understanding of concept [Building Blocks]. These classes iteratively represent the refinement job during design. Classes also act as an index to various implementations.
3. Tou and Gonzalez: Explained classification based on psychophysiology i.e., the relation between the person and the system. When a person is introduced to a system the human intelligence may help him to identify a set of objects and classes which later can be refined.

## Classification Approaches:

Many approaches have been introduced for identifying classes in a domain. The most used ones are

1. Noun Phrase Approach
2. Use – Case driven Approach
3. Common Class Approach
4. Class Responsibilities and Collaborators

### 1. Noun Phrase Approach:

The classes are identified from the NOUN PHRASES that exist in the requirements/ use case. The steps involved are

1. Examining the use case/ requirements.
2. Nouns in textual form are selected and considered to be the classes.
3. Plural classes are converted into singular classes.
4. Identified classes are grouped into 3 categories
  - a. Irrelevant Classes – They are the unnecessary classes
  - b. Relevant Classes – They are the necessary classes

- c. Fuzzy Classes - They are the classes where exist some uncertainty in their existence.
5. Identify candidate classes from above set of classes.

Guidelines for selecting candidate classes from Relevant, Irrelevant and Fuzzy set of classes.


1. Redundant Classes – Never keep two classes that represent similar information and behavior. If there exist more than one name for a similar class

select the more relevant name. Try to use relevant names that are use by the user. (E.g. Class Account is better than Class Moneysaving)

2. Adjective Classes – An adjective qualifies a noun (Class). Specification of adjective may make the object to behave in a different way or may be totally irrelevant. Naming a new class can be decided how far the adjective changes the behavior of the class. (E.g. The behavior of Current Account Holder differs from the behavior of Savings Account Holder. Hence they should be named as two different classes. In the other case the toper adjective doesn't make much change in the behavior of the student object. Hence this can be added as a state in the student class and no toper class is named)
3. Attribute Class – Some classes just represent a particular property of some objects. They should not be made as a class instead they can be added as a property in the class. (E.g. No Minimum Balance, Credit limit are not advised to named as a class instead they should be included as an attribute in Account class).
4. Irrelevant Class – These classes can be identified easily. When a class is identified and named the purpose and a description of the class is stated and those classes with no purpose are identified as irrelevant classes. (E.g .Class Fan identified in the domain of attendance management system is irrelevant when u model the system to be implemented. These type of classes can be scraped out.)

The above steps are iterative and the guidelines can be used at any level of iteration. The cycles of iteration is continues until the identified classes are satisfied by the analyst/ designer.

The iterative Process can be represented as below

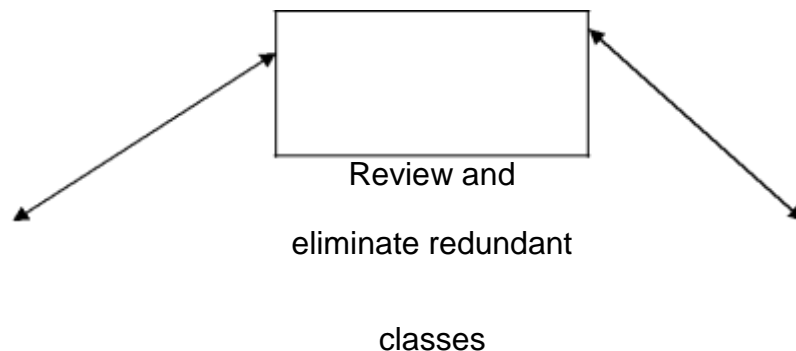

Review irrelevant  
classes

Review Adjectives



Review Attributes

[Note: USE EXAMPLE FROM THE CASE STUDY]

## 2. Common Class Patterns Approach:

A set of classes that are common for all domains are listed and classes are identified based on that category. The set of class category is listed based on the previous knowledge (Past Experience).

The Class Patterns are

### 1. Concept Class

- This category represents a set of classes that represent the whole business activity (Concept). The never contains peoples or events. These classes represent the entire concept in an abstract way. (E.g. SavingsBank Class)

### 2. Events Class

- These are the category of classes that represent some event at a particular instance of time. Mostly they record some information. (E.g. Transaction Class)

### 3. Organization Class

- These are the category of classes that represent a person, group of person, resources and facilities. Mostly a group of organization class has a defined mission (target or task). (E.g. CSEDEPT Class represents a group of employees who belongs to Dept of CSE).

### 4. People Class

- This category contains the individuals who play some role in the system or in any association. These people carry out some functions that may be some triggers. People class can be viewed as a subcategory of Organization class. This category again contains 2 subsets
  - i. People who use the system (E.g. Data Entry Operator who use the system for entering attendance may not be an employee of the college but a contract staff.)
  - ii. People who do not use the system but they play some role in the system. (E.g. Lecturer, Students, Instructor etc)

### 5. Place Class

- This category of classes represents physical locations which is needed to record some details or the place itself is recorded in detail. (E.g. Information about BLOCK1 where CSE dept functions).

## 6. Tangible things and Device Class

- This category includes tangible objects and devices like sensors involved in the system.

[Note: USE EXAMPLE FROM THE CASE STUDY]

## 3. Use Case Driven Approach – Identifying Classes

Use case diagram/ Model represents different needs of the user and various actors involved in the domain boundary. Unified Approach recommends identification of objects with

the Use Case model as the base. Since the use case represents the user requirements the objects identified are also relevant and important to the domain.

The activities involved are

1. A particular scenario from an use case model is considered
2. Sequence of activities involved in that particular scenario is modeled.
3. Modeling the sequence diagram needs objects involved in the sequence.
4. Earlier iteration starts with minimum number of objects and it grows.
5. The process is repeated for all scenarios in the use case diagram.
6. The above steps are repeated for all the Use Case diagrams.

[Note: USE EXAMPLE FROM THE CASE STUDY, SPECIFY ATLEAST 2 LEVELS OF ITERATION FOR A SINGLE USE CASE SCENARIO]

### 3. Classes, Collaborators, Responsibilities – Classification (CRC)

Classes represents group of similar objects.

Responsibilities represent the attributes and methods (responsibilities of the class)

Collaborators represent other objects whose interaction is needed to fulfill the responsibilities of the class/object.

CRC Cards – They are 4” X 6” cards where all the information about the objects is written.

Class Name	Collaborators
Responsibilities	

...


..

The above diagram represents the format of a CRC card. It contains the class name and responsibilities on the L.H.S compartment. Class name on the upper left most corner and responsibilities in bulleted format. Class Name identifies the class and Responsibilities represent the methods and attributes. Collaborators represent the other objects involved to fulfill the responsibility of the object.

This information on the card helps the designer to understand the responsibilities and collaborating classes.

The Process involves

- Identify classes.
- Identify responsibilities.
- Find out the collaborators and need.
- Create CRC card for each class identified.

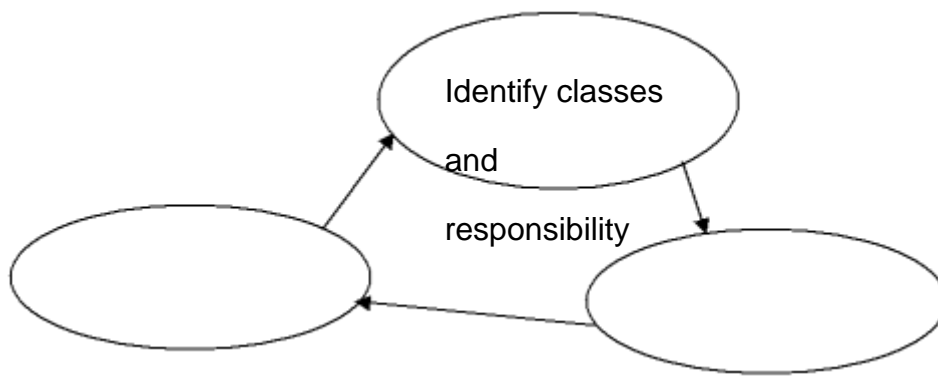

Identify

Collaboration

Assign

Responsibility

E.g.

Account	
<ul style="list-style-type: none"> <li>• Balance</li> <li>• number</li> <li>• withdraw()</li> <li>• deposit()</li> <li>• getBalance()</li> </ul>	Current Account (Sub class)  Saving Bank (Sub class)  Transaction.

The above diagram shows an example of a CRC card representing Account Class.

Its responsibility is to store information like Balance, Number and to have behaviors like withdraw, deposit and getBalance.

Account class has 2 subclasses. They are Current Account and Savings Account. It also collaborates with Transaction class to fulfill the responsibilities.

## Guidelines for Naming Classes:

- Use singular Class Name
- Use Comfortable/ relevant names
- Class Name should reflect the responsibility
- Capitalize class names or Capitalize first letter

## Identifying Object Relations, Attributes and Methods.

### 1. Association:-

Association represents a physical or conceptual connection between 2 or more objects.

Association is represented by a straight line connecting objects.


Binary association exists between 2 objects/ classes.

Trinary association exists between 3 objects/ classes.

N- Ary association exists between N objects/ classes.

Association names make the association more informative. It is the label attached to the line representing the association.

Association role is the role played the objects involved in the association. It is attached to link representing the association.

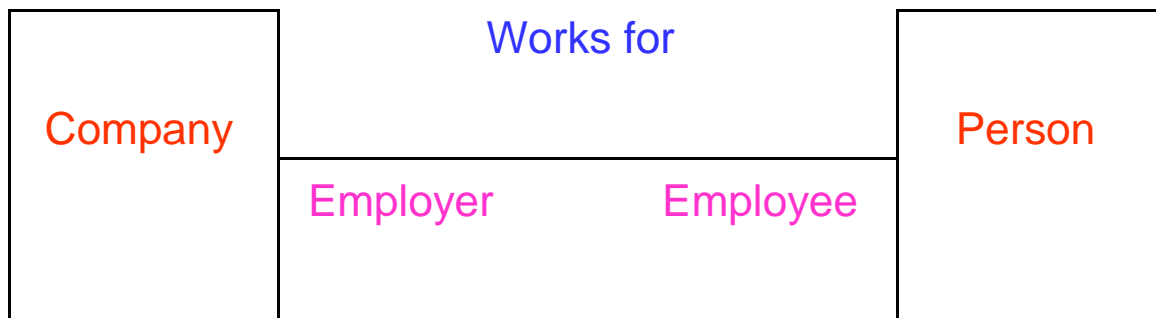

The above diagram represents the association between the person and the company. The association says that Person object works for a company object.

Association Name: Works for

In this association Company plays the role of employer and person plays the role of employee.

Steps in identifying associations:

Associations are identified by analyzing the relationship among classes. The dependencies are found out by analyzing the responsibilities of the class.

Answers for the following questions can be used to identify the associations.

1. Is the class capable of doing all its responsibilities?
2. If not what does it need?
3. What are the other class needed to fulfill the requirements?

Some cases the associations are explicit where in other cases they are identified from general knowledge.

Common Association Patterns:

These patterns and associations are group of associations identified by good expertise persons and researchers.

For Example

- Location Pattern – associations of type next to, part of, contained in that represents association with respect to the physical location. For e.g. tyre is a part of car.
- Communication Pattern – association of type talk to, order to that represents associations with respect to communication. For e.g. driver turns the vehicle.

These patterns are maintained in the repository as groups and when a new association is identified it is placed in the relevant group.

Guidelines for eliminating unnecessary associations:

- 1) Remove implementation associations separate those associations that represent associations related to implementation. Postpone these issues to later stages of design or initial stages of coding.
- 2) Eliminate higher order associations by decomposing them into set of binary associations. Higher order associations increase the complexity where binary relations reduce complexity by reducing the confusions and ambiguities.
- 3) Eliminate derived associations by representing them in simpler associations. For e.g. Grand Parent Association can be represented in terms of two parent relationship. Hence it is enough to deal the parent relationship and no grandparent relationship.

## 1. Super – Sub Class Relationship (Inheritance):-

Super – Sub class relationship known as generalization hierarchy. New classes can be built from other classes hence the effort for creating new classes gets reduced. The newly built class is called a derived class and the class from which the new class is built is called Base Class. This inheritance allows user to share the attributes and methods.

[ NOTE: Give one example]

### Guidelines for identifying Super – Subclass relationship

- 1) Top – Down: - Identify more generalized classes first analyze the purpose and importance of those classes. If necessary identify the specialized classes and represent them. If needed increase the number of levels of generalization/ inheritance.
- 2) Bottom – Up: - Identify classes and compare them for similar properties and methods. If generalization applies find a new class that can represent the similar classes.
- 3) Reusability: - Analyze the specialized classes and check whether similar properties/ behavior lie in same layer. If such members exist push them to top most level as possible.
- 4) Remove multiple inheritance if it creates any ambiguity in the design. Such inheritance

## Object Oriented Analysis:

Analysis is a process of transforming a set of facts into a set of complete, unambiguous and consistent picture of requirements of the system must do to fulfill the user's requirement needs.

In this phase developer will analyze how the user will use the system and what should be done to satisfy the user. The analyst may use the following technique

1. Examination of existing system requirements

2. Interviews
3. Questionnaire
4. Observation

Analysis is a difficult process because of the following contents in the SRS

1. Fuzzy descriptions
2. Incomplete requirements
3. Unnecessary features

Business Object Analysis process:

In three tier architecture the business layer actually implements the logic that solves the requirement. Hence analysis done for objects in business layer. The Object Oriented Analysis Process involves the following steps

1. Identify the actors who use the system
  - a. Who is using the system? OR
  - b. Who will be using the system?
2. Develop the simple business process model using an Activity diagram
3. Develop Use Case
  - a. What are the users doing with the system?
  - b. What are the users going to do with the system?

4. Prepare Interaction diagram for classification

5. Classification

a. Identify classes

b. Identify relationships

c. Identify attributes

d. Identify methods

6. Iterate and refine

1. Identifying Actors:

Actor represents the role of a user with respect to the system. An user may play more than one role. Analyst have to identify what are the roles played by the user and how they use. Actors can be identified using the following questions


1. Who is using the system?
2. Who is affected by the system?
3. Who affects the system?
4. What are the external systems used to fulfill the task?
5. What problems does this application solve and for whom?
6. How users use the system?

Jacobson provides two – three rule in identifying actors. i.e. start with 2 or 3 classes (minimum) number of classes and refine on later iterations.

[ Note: State the ATM System domain and specify the actors found from the Case Study] 2. Developing a Simple Business Process Model

The entire set of activities that takes place in the domain are represented with the help of a simple Business Process Model created with an UML activity diagram. This makes each member of the team very familiar with the domain and overall activities that takes place when a

aduser uses the system in the domain.

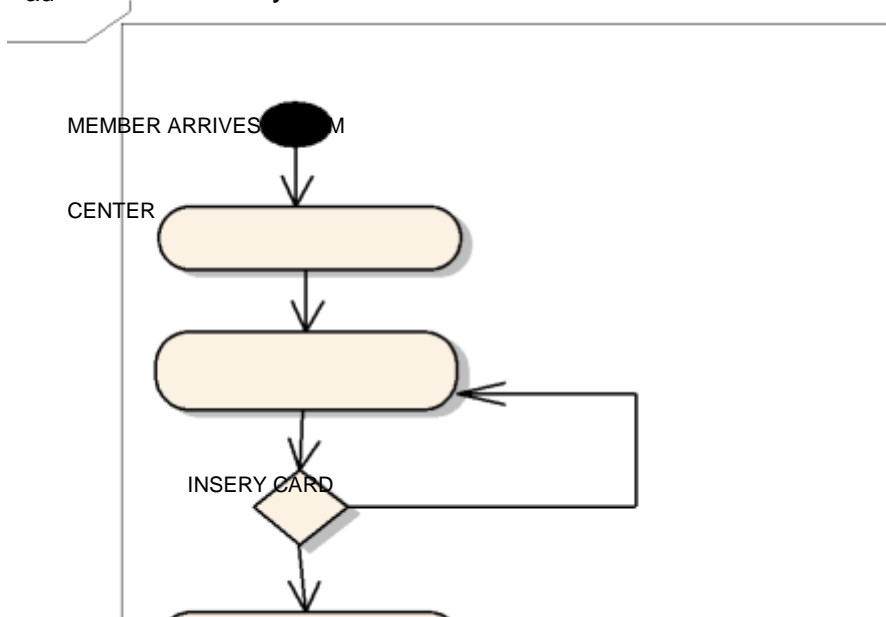

ENTERS

PASSWORD

CORRECT

PIN?

SELECT THE

TRANSACTION

TYPE

PERFORMS

TRANSACTION

MORE

TRANSACTION?

The above diagram represents the Business Process Model for an ATM System. It lists out following activities done by the user in an ATM Center.

1. User enters the ATM Center and inserts the card
2. He Enters the PIN
3. If he enters an incorrect PIN machine ask for correct PIN
4. User selects the type of Transaction
5. System Performs the Transaction
6. User collects the cash, card and leaves the ATM Center.

2. Develop use case model.


Use case diagram represents various requirements of the user. This use case model can be used in most of the phases.

It consists of

- a. Actors involved
- b. Various Scenarios (Use Cases)
- c. Communication between actors and use cases
- d. Relation between various use cases
  - i. USES
  - ii. Extends

a. Actors: Actors represents the role played by the user with respect to the system. An user may play

more than one role. Actors are represented by any of the three ways in UML

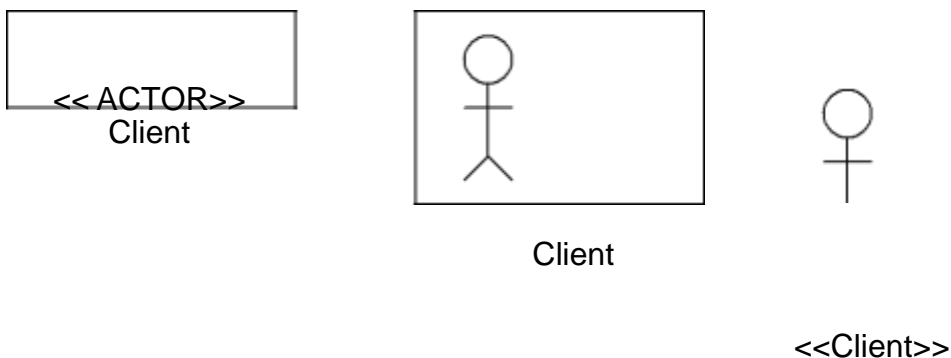

While dealing with the actors importance is given to the role than the people. An actor uses more than one use case.

b. Use Cases: Use Case represents the flow of events/ sequence of activities possible in the system.

A use case can be executed by more than one actor. An use case is developed/ named by grouping a set of activities together.




Use Case Name


c. Communication between actors and use case. Communication between an actor and use case is represented by a straight line connecting the actor and the use case. The line represents that the actor/ user uses that particular use case. An actor may use more than one use case.

#### d. Relation between Use Case.

i) Uses – This relationship exist when there is a sub flow between use case. In order to avoid redundancy (created in all the places where there is a sub flow) sub flow is represented by a single Use Case and it can be used by any Use case. This is a way of sharing use cases.

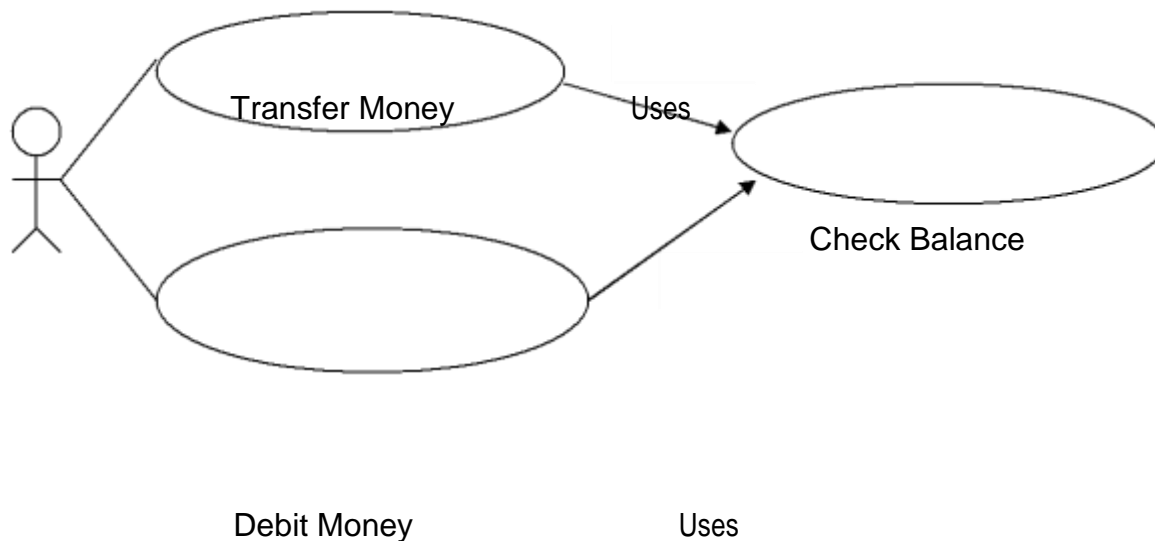

ii) Extends – Extends relation exist between Use Cases if one use case is similar to the other use case but does some more operations. (Note the same relation exist between super – sub class). This relation helps the analyst and the designer to establish relationship between classes and packages that implement the use case.

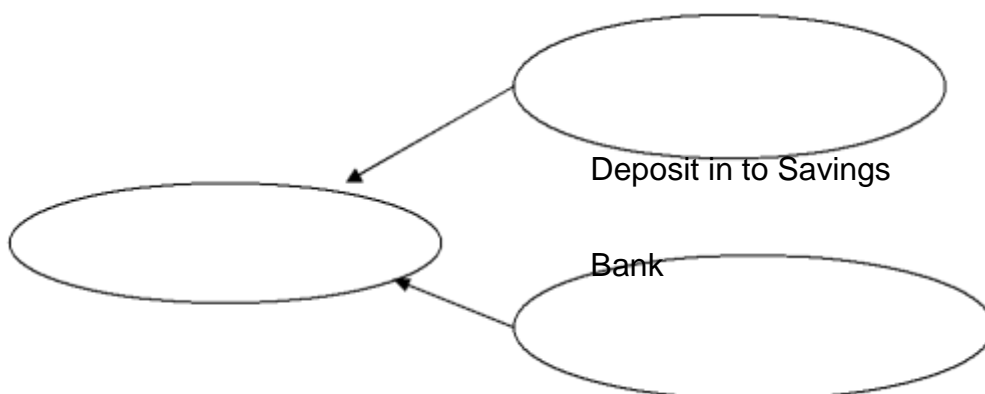

Deposit in to  
Account

Deposit in to Current  
Account

Abstract and Concrete Use Case:

An Abstract Use Case is one not executed by the user and it is not complete. Abstract Use Case is used by other use case. They can be inherited.

A Concrete Use Case is one executed by the user and is complete.

Guidelines for developing Use Case:

1. Capture simple and normal Use Case first
2. Find out the mistakes and alternate ways of representing the work.

3. Find out the common operations among the use cases and represent them as a specialized use case.

## Documentation:

Documentation is the effective way of communication between different developers/ team. This document reduces the gap between different phases/ team. The detailed representation of each work and product developed during various iterations of different phases are written. Document serves as a reference point for future reference.

### Guidelines for Developing Effective Documentation:

1. Use common cover
2. Mind 80 – 20 rule while creating and referring documents.
3. Try only familiar terms in document.
4. Make document as short as possible.
5. Represent the document in an organized way.

## UNIT-IV

## Access Layer Design:

The need of access layer is to design/ create a set of classes that have rights and the way to communicate with the database or data storage place. It isolates following information from the business layer hence it gives service to the business layer.

- 1) Where data resides?

Local, Local server, remote server etc.

- 2) How data resides?

In a database, in a file, DBMS, RDBMS, ORDBMS, Internet etc.

### 3) How to access the stored data?

SQL, stream, File stream, ORB (for DCOM/ EJB) etc.


Access layer provides 2 important service to business layer

**Translate Request**    The business layer is not aware of the protocol for accessing data as the


internal details are known only to the access layer classes. So any request from the business layer for

data cannot be transformed to storage as such. Such request are translated in to a form that storage

managers can understand and then transformed.

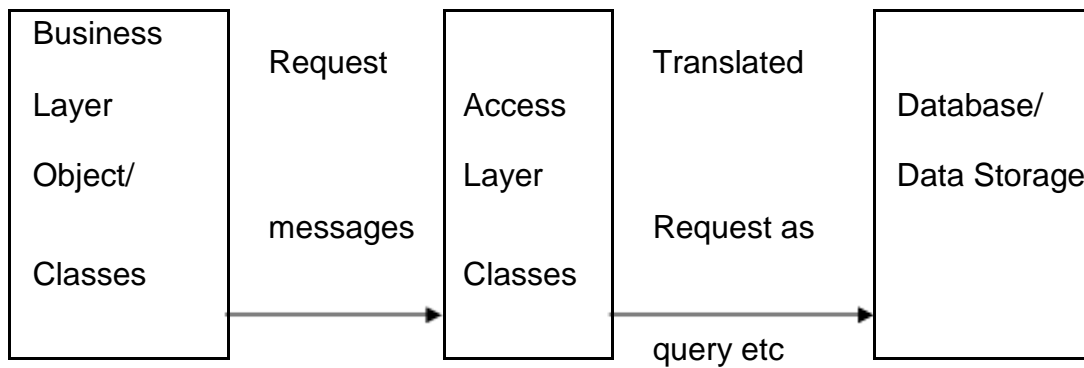

**Translate Result** The business layer objects/ classes cannot understand the data send as such from the database/ storage. But the access layer classes can understand the format of result data from the storage as well as the format the business layer can understand. Hence the access layer classes translate the result data in to a form so that business layer can understand.

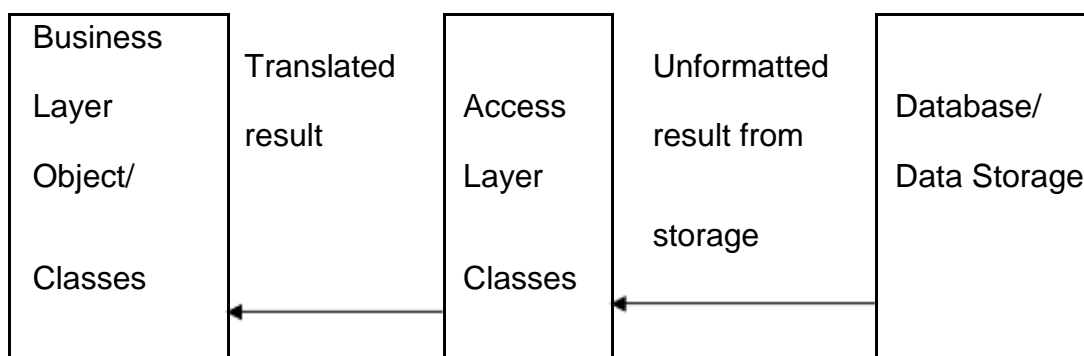

**Persistent Data** Persistent data is one which exists between executions. These data is to be stored permanently for future executions.

E.g. In a student class the name, no, address etc are persistent data.

Transient Data Transient data is one that may not exist between executions. These data are need not to be stored in database for future execution.

E.g. In a student class the variables meant for temporary purpose like temp\_tot etc are transient data

Access Layer Design Sub Process:

I. Design access layer

- i. Create mirror class for all classes identified in business layer which contains persistent data.
- ii. Identify access layer class relationship
- iii. Simplify access layer classes and class relationship
  1. Remove redundant classes

2. Single method classes can be removed and added in another class.

iv. Iterate and refine.



## [Note: Explain the process in detail]


The below diagram demonstrates the sub process.


First diagram represents the step mirroring.

The second diagram represents the step of identifying relationship between access layer classes.

The third diagram represents simplified class diagram.

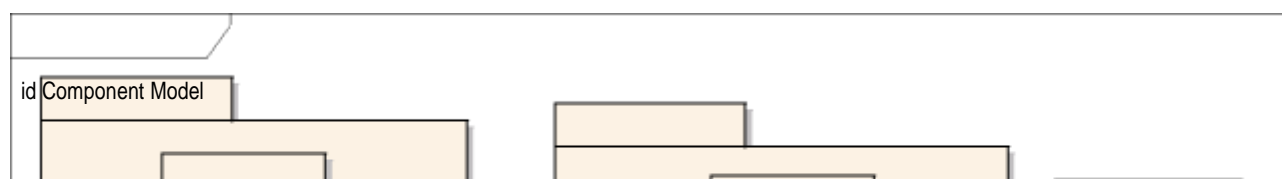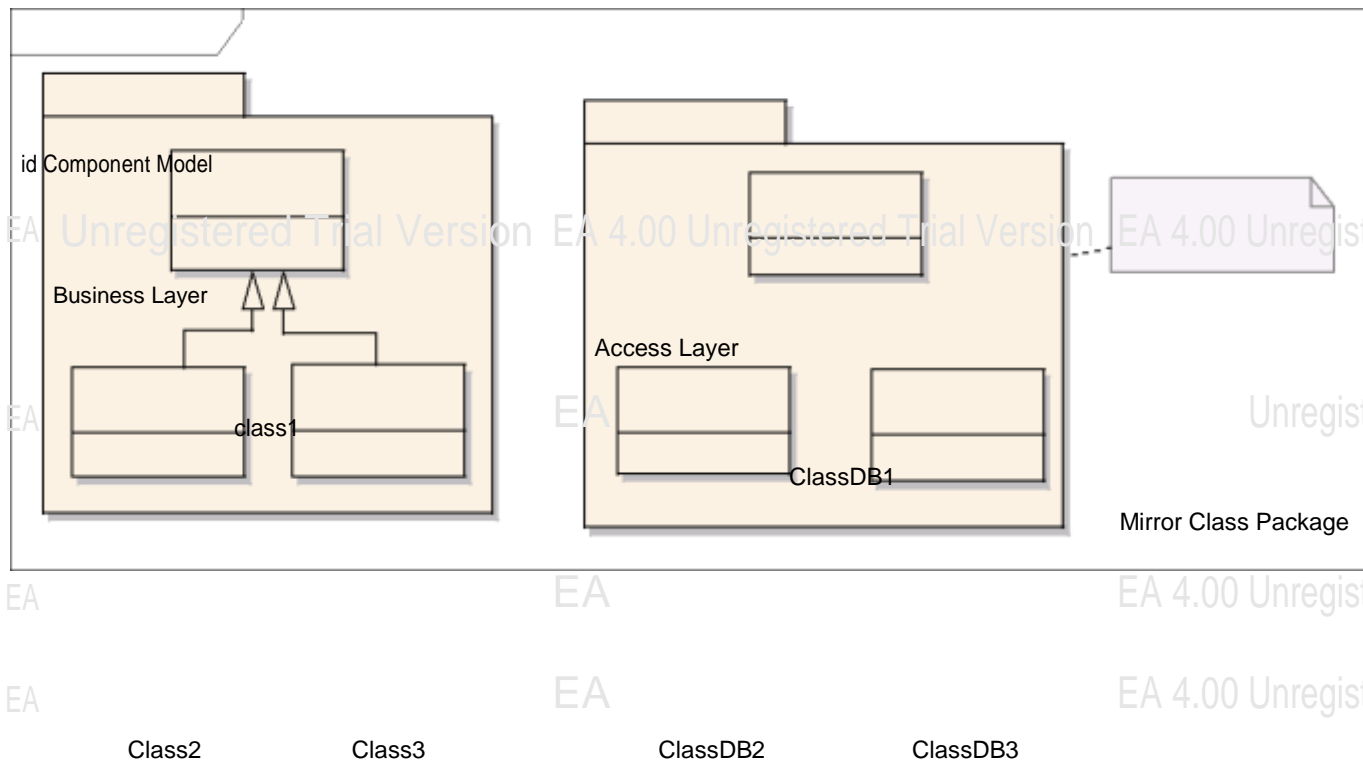

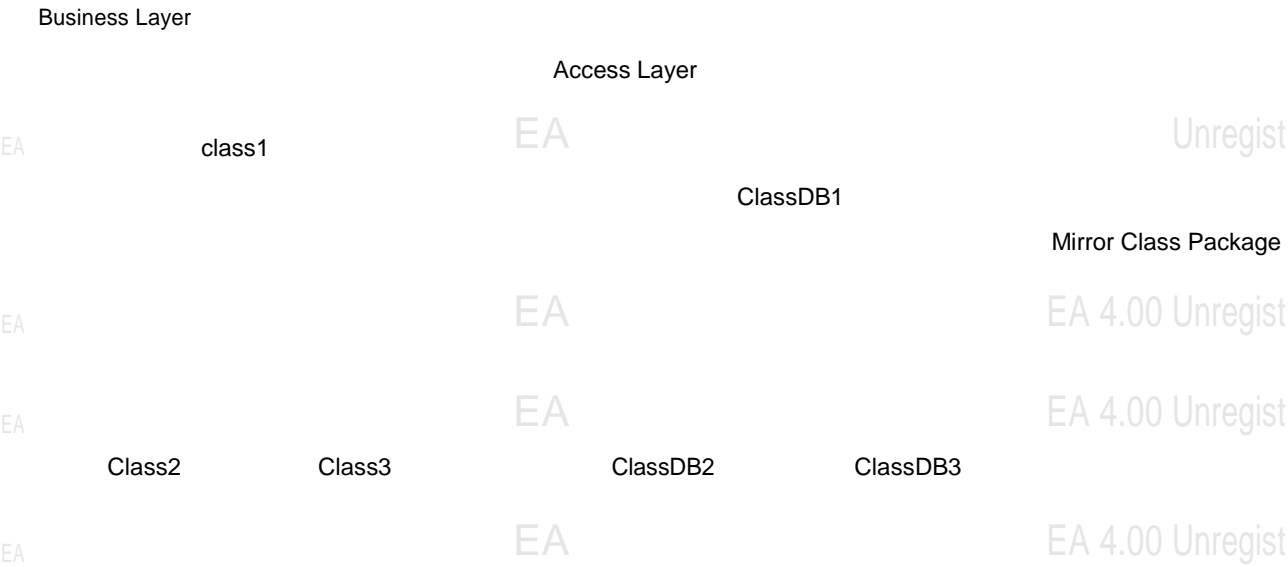

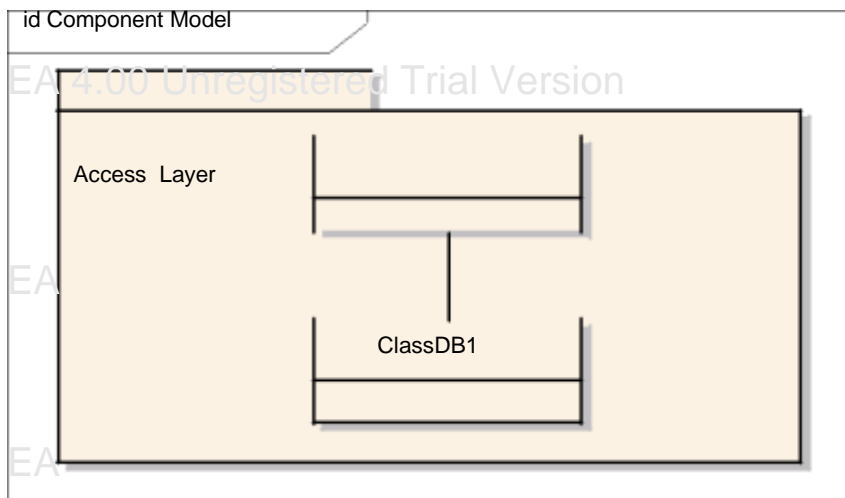

ClassDB3

## Study of Object Storage Techniques:

DBMS – Database Management System is a set of programs that enables the creation and maintenance of collection of related data. The DBMS and associated programs access, manipulate, protect and manage the data.

Lifetime of objects/ data can be categorized as following

Transient:

1. Transient results to the evaluation of expression.
2. Variables involved in procedure activation
3. Global variables that are dynamically allocated

Persistent:

1. Data that exist between different executions of programs.
2. Data that exist between different versions of programs

3. Data that outlive a program.

## Study of DBMS:

DBMS – Database Management System is a set of programs that enables the creation and maintenance of collection of related data. The DBMS and associated programs access, manipulate, protect and manage the data.

DBMS also contains the full definition of the data formats. It is called meta data or schema. Since the complexity and issues regarding the storage lies with in the DBMS it provides a generic storage management system.

## Database Views:

The low level storage details are isolated from the user and for better understanding the logical concepts are supplied to the user.

The various logical concepts are represented by different database views.

## Database Models:


**A Persistence** – This refers to the life time of an object. Some objects outlive the programs. Persistent Objects are one whose life time is long and transient objects are those whose lifetime is very short.

database model is a collection of logical constructs used to represent the data structure and data relationships within the database.

The conceptual model represents the logical nature of organization of data where an implementation model represents the real implementation details.


### 1. Hierarchical Model


This model represents the data as a single rooted tree structure. Each node represents the data object and connection between various nodes represents the parent – child relationship. This relationship resembles the generalization relationship among objects. A parent node can have any number of child nodes where each child node shouldn't have more than one parent node.

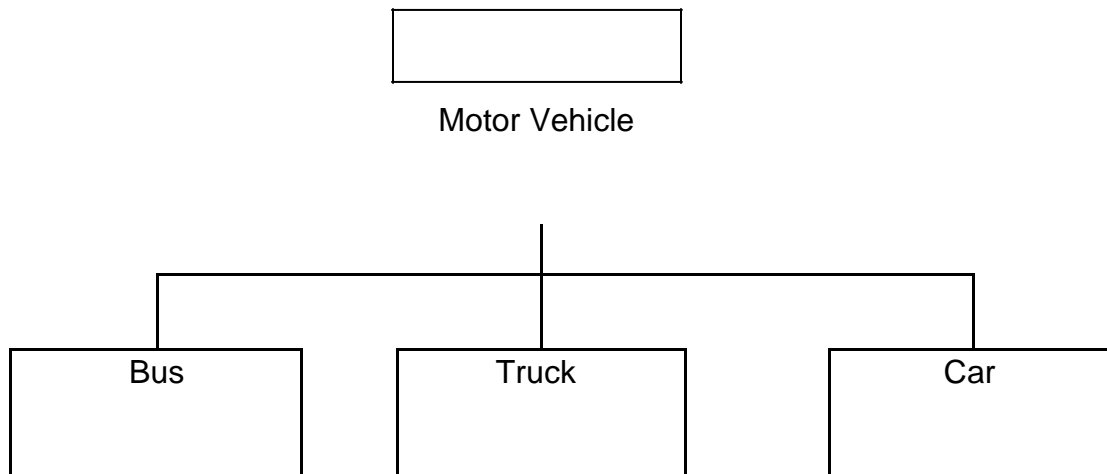

### 2. Network Model

A network database model is similar to the hierarchical model. Here in this model each parent can have any number of child nodes and each child node can have any number of parent nodes.



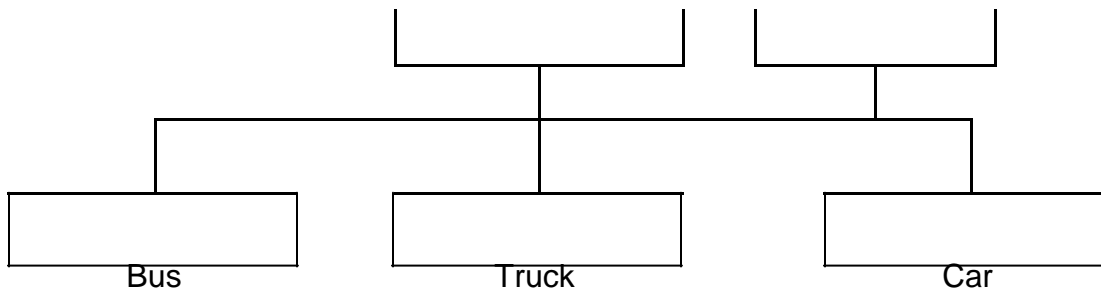

### 3. Relational Model

This model defines 4 basic concepts. Table, Primary Key, Foreign Key and relation between tables.

Table – It's a collection of records form the table. The Table is composed of various rows (tuples) and columns (attributes).


A primary key is a combination of one or more attributes which is used to identify any tuple unambiguously. Primary never gets duplicated in a table.

Foreign key is an attribute of a table that is a primary key of another table.

Relation between tables – The primary key of one table is the foreign key of another table.

Also data can be searched with the combination of more then one table.

Because of these reasons the relational model is the most widely used model.

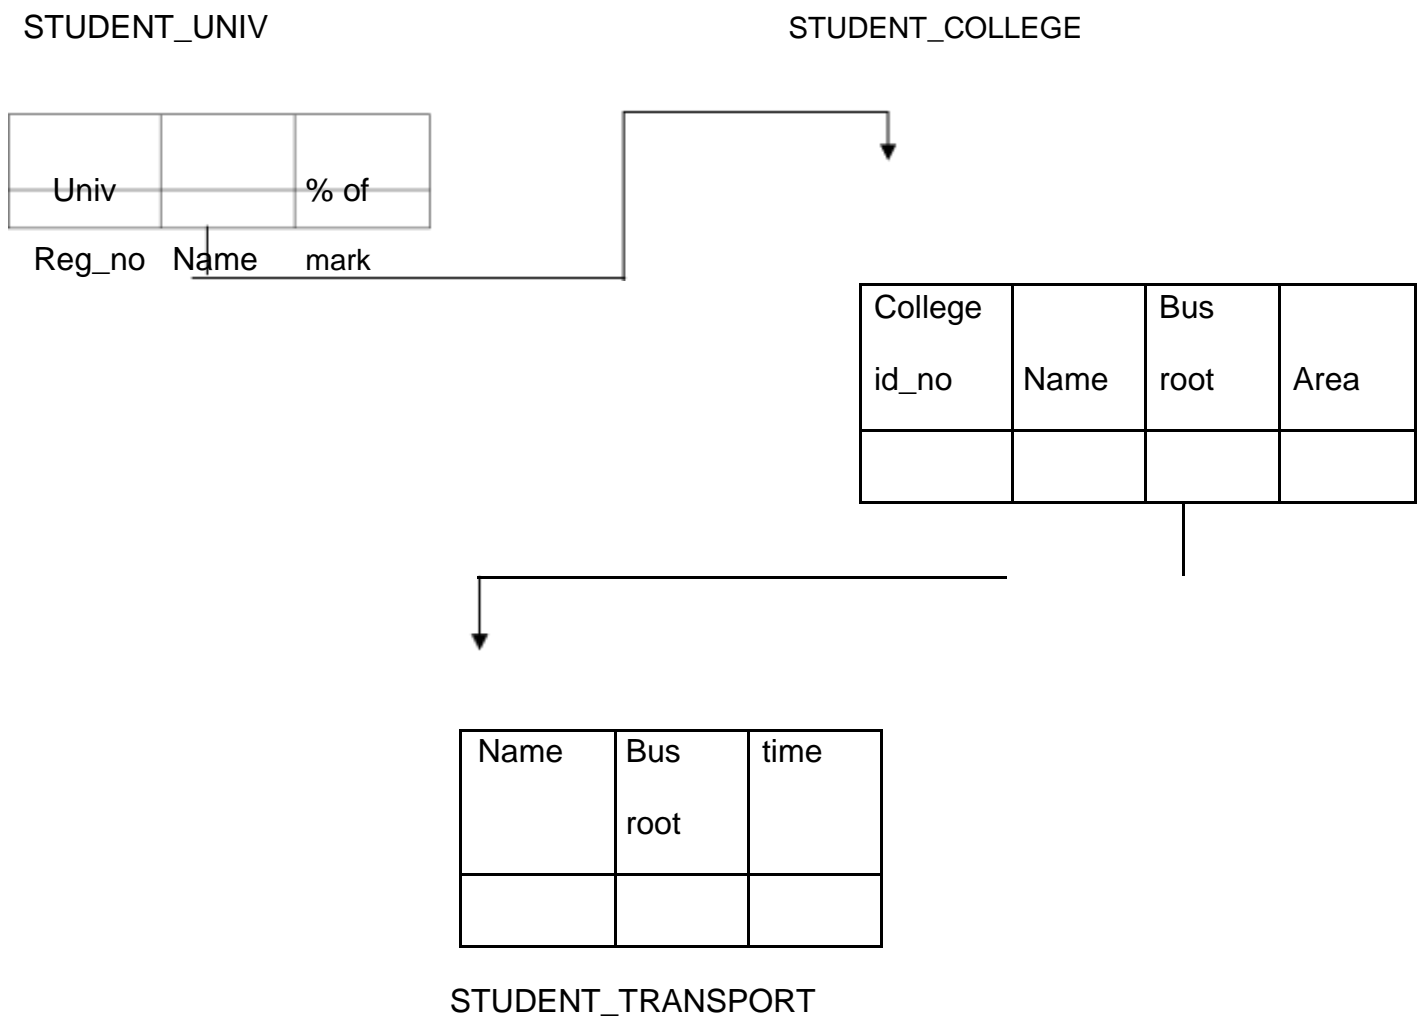

Database Interface:

The interface of a database includes Data Definition Language (DDL), Data Manipulation Language (DML) and a query.

There are two ways to establish relation with the database

- 1) By embedding SQL in a program that needs an interface. Since SQL (Structured Query Language) is one of widely accepted language usage of SQL in a program makes programmers feel easy.
- 2) Extending the programming language to manage data. Here the programmers have to know about the data models and implementation details.

DDL – Data Definition Language is the language used to describe the structure of

Objects (data) stored in a database and relation between them. This structure of information is called Database Schema. DDL is used to create tables in a database.

E.g

```
CREATE SCHEMA COLLEGE
```

```
CREATE DATABASE COLLEGE_DB
```

```
CREATE TABLE STUDENT_TRANSPORT (Name char (10) NOT NULL, Busroot  
number (2) NOT NULL, time TIME)
```

DML and Queries:

Data Manipulation Language is used for creating, changing and destroying data inside a table. SQL (Structured Query Language) is the standard language for making queries.

A query usually specifies

- \* The domains of the discourse over which to ask the query.
- \* The elements of general interest.
- \* The conditions are constraints that apply.
  
- \* The ordering, sorting, or grouping of elements and the constraints that apply to the ordering or grouping.

Traditional DML specifies what are the data desired and specifies how to retrieve the data. Object Oriented DML just specifies what data is desired and not how. While developing applications that uses SQL the mostly used way is to embed the SQL statements inside the program.

Transaction:

A transaction is a unit of change in which many individual modifications are aggregated into a single modification that occurs entirely or not at all. Thus all the changes inside the transactions are done fully or none at all.

A transaction is said to be commit if all the transactions made are successfully updated to the database and said to abort if all the changes made cannot be added to database.

Concurrent Transaction:

A transaction is said to be concurrent if it uses a database which is used by another transactions. Hence a database lock is used to avoid problems like “last updated”. When a transactions starts using a database it is locked and is not available to other transactions.

Distributed Database is one in which a portion of database lies of one node and other on another node.

Client Server Computing.

Client – Node that request for a service

Server – Node that services the request.

Client Server computing is the logical extension of modular programming. The fundamental concept behind the modular programming is decomposing the larger software in to smaller modules for easier development and maintainability.

Client Server computing is developed by extending this concept i.e, modules are allowed to execute in different nodes with different memory spaces. The module that needs and request the service is called a client and the module that gives the service is called a server.

The network operating system is the back bones of this client sever computing. It provides services such as routing, distribution, messages, filing and printing and network management. This Network Operating System (NOS) is called middleware.

## Client Program:

- It sends a message to the server requesting a service (task done by server).
- Manages User Interface portion of the application.
- Performs validation of data input by the user.
- Performs business logic execution (in case of 2 tier).
- Manages local resources.
- Mostly client programs are GUI.

## Server Program:

- Fulfills the task requested by the client.
- Executes database retrieval and updation as requested by the client.
- Manages data integrity and dispatches results to the client.
- Some cases a server performs file sharing as well as application services.
- Uses power full processors and huge storage devices.

File Server – Manages sharing of files or file records. Client sends a message to the file

server requesting a file or file record. The File Server checks the integrity and availability of file/record.

Data Base Servers – Client pass the SQL query in the form of messages to the server in turn server performs the query and dispatches the result.

Transaction Servers – Client sends message to the server for a transaction (set of SQL statements) where the transaction succeeds or fails entirely.

Application Servers – Application servers need not to be database centric. They may Serve any of user needs such as sending mails, regulating download.

## Characteristics of Client Server Computing:

1. A combination of client/ front end process that interacts with the user and server/ backend process that interacts with the shared resources.
2. The front end and back end task have different computing resource requirements.
3. The hardware platform and operating system need not be the same.

4. Client and Server communicate through standard well defined Application Program Interface (API).
5. They are scalable.

### Distributed and cooperative processing

In Distributed Computing the applications and business logic are distributed across multiple processing platforms. It implies that the processing should be carried out in different process for the transaction to be completed. These processes may not run at same time. Proper synchronization mechanism is provided if needed.

Cooperative processing is a type of distributed computing where more than one process is to be completed for completing the entire transaction. These processes are executed concurrently on different machines and good synchronization and inter process mechanism is provided.

Distributed Object Computing offers more flexible way of distributed computing where mobile software components (objects) travel around the network and get executed in different platforms. They communicate with application wrappers and manage the resources they control. In this computing the entire system is made up of users, objects and methods.

Various DOC standards are OMG's CORBA, OpenDoc, Microsoft ActiveX/ DCOM.

### Object Relation Mapping.

In a relational database system the data are stored in the form of tables where each table contains a set of attributes/fields and tuple/rows. In an object oriented environment the counterpart of class is a table.

In the mapping the classes are mapped to table such a way that the persistent data members of classes will become the attributes. Each row in the table corresponds to an object. The following mapping types are used in object oriented environment

1. Table – Class Mapping
2. Table – Multiple Class Mapping
3. Table – Inherited Class Mapping
4. Tables – Inherited Class Mapping


#### 1. Table Class Mapping

It's a simple one – to – one mapping of a class to a table and properties of class are become the fields. Each row in the table represents an object and column

represents a property of objects.

CAR TABLE

Cost	Color	Make	Model




## 2. Table – Multiple Classes Mapping

Here a single table is mapped to more than one non inherited classes. So all the persistent properties of mapped classes represents the columns of the table. The column value that is not common for the mapped classes can be used to identify the instance.

In the below example the Employee Class and Customer Class are mapped to person table. Instances of employee class can be identified from the rows whose custID value is NULL. Also instances of Customer class can be identified from the rows whose emplID is NULL.



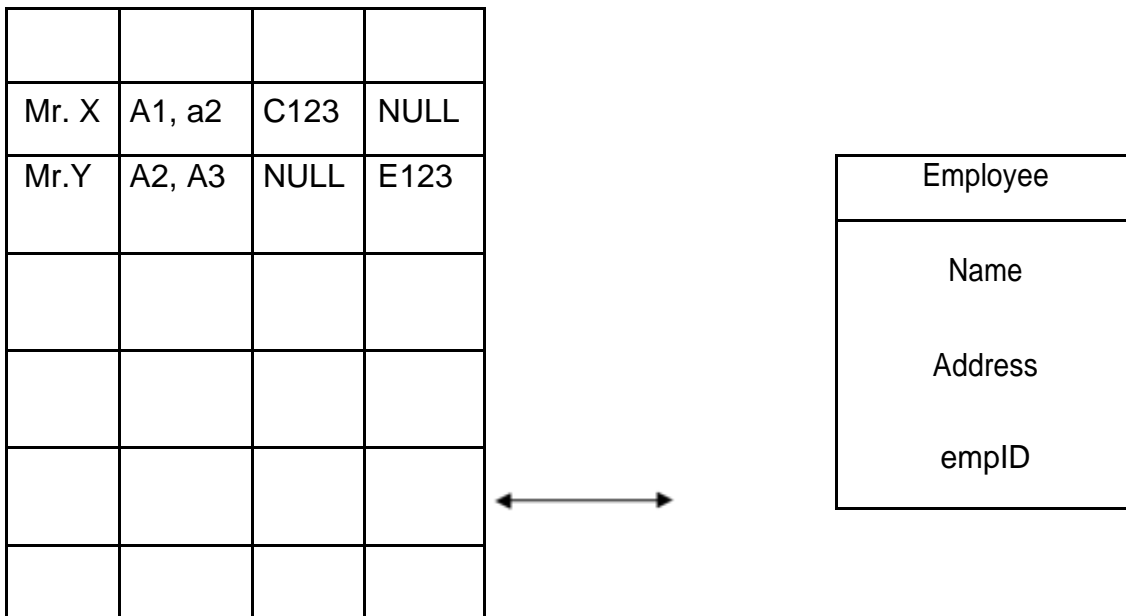

### 3. Table Inherited Classes Mapping

In this case a single table is mapped to more than one class which has a common super class.

This mapping allows user to represent the instances of super class and subclasses in a single table.

In the given example the instances of Employee class can be identified from the rows whose wage and salary are NULL. The instances of Hourly Employee can be identified from the rows whose salary is NULL. The instances of Salaries Employee can be identified from the rows with Wage as NULL.

### 4. Multiple Tables – Inherited Classes Mapping.

This kind of mapping allows is a to be established among tables. In a relational database this is possible by using primary key and foreign key.

In the below example Employee and Customer inherits the properties of Person class. The Person table is mapped to Person class, Employee table is mapped to Employee class and Customer table is mapped to Customer Class. There exist is a relation between Employee, person and customer, person.



nregistered Trial Version EA 4.00 Unr

Person

nregistered - ssn: EA 4.00 Unr

- name:

- address:

nregistered Trial Version EA 4.00 Unr

Employee Trial Version Customer Unr

- dept:

- name:

- slary:

- address:

Trial Version Unr

- company:


nregistered Trial Version EA 4.00 Unr

Name	Address	SSN

Name	Dept	SSN	Salary

Name	Address	Company

## Study of Multi Database System and Open Database Connectivity

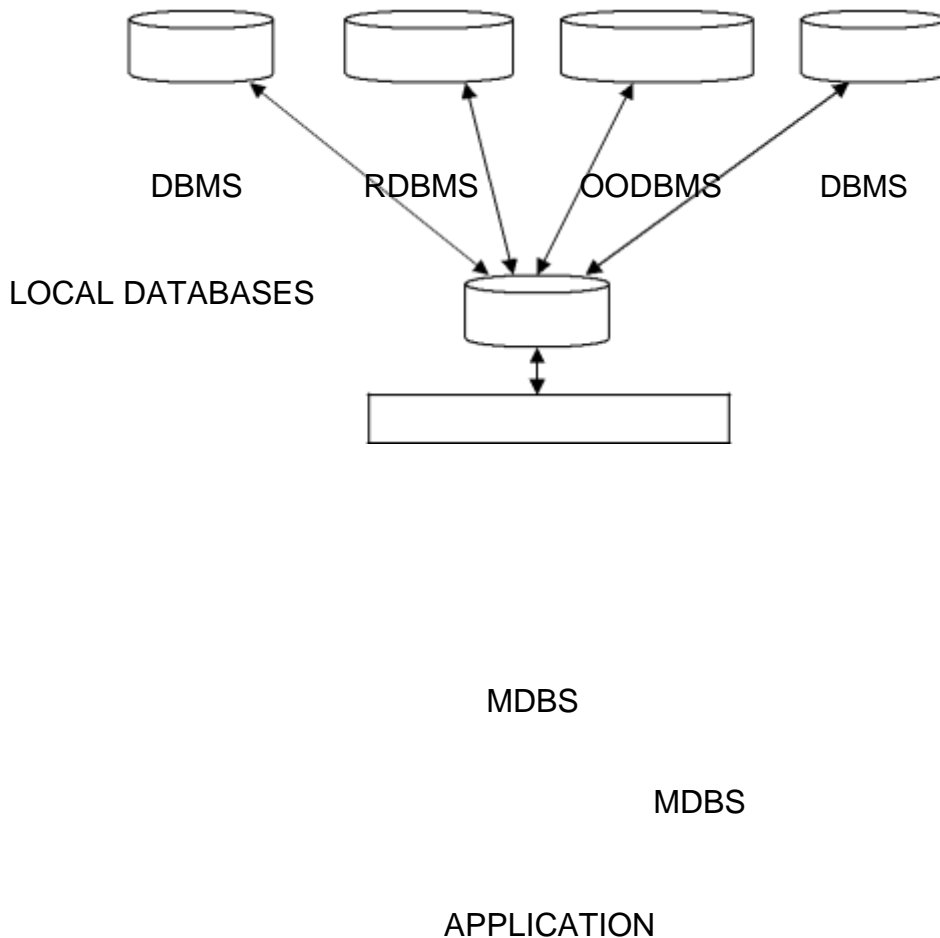


Multi database system is a heterogeneous data base system facilitate the integration of heterogeneous database systems and other information sources. Federated multi database systems are one that are unstructured or semi unstructured.

This multi database system provides single database illusion to the users. The user initiate a single transaction that in turn uses many heterogeneous databases. Hence the user performs updation and queries only to a single schema. This schema is called the global schema and it integrates schemata of local databases. Neutralization solves the schemata conflicts.

The query and updates given to global schema by the user is decomposed and dispatched to local databases. The local databases are managed by gateways as one gate way for each local database.

Open Database Connectivity (ODBC) is an API (Application Program Interface) that provides database access to application programs. The application programs can communicate with the database through function calls (message passing) regardless of the type and location of the database.

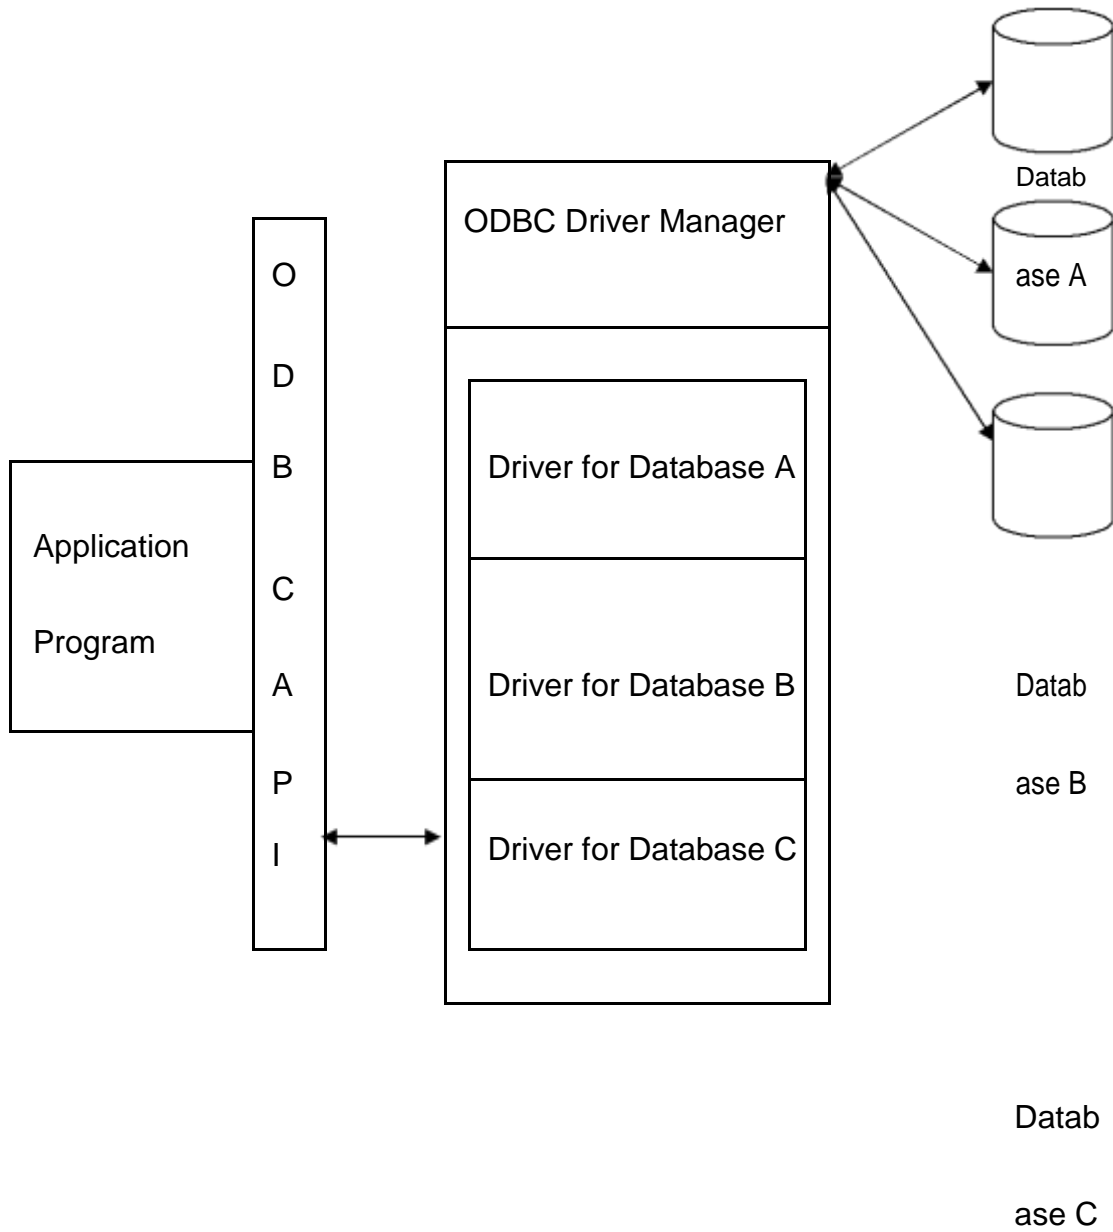

The above diagram shows the logical view of Virtual Database using ODBC. The application program uses ODBC API to communicate with the database. Application programs pass same messages to interface irrespective of the type and location of database. ODBC maintains a set of drivers necessary for communicating with the database. This reduces the database related complexities for a programmer.


The driver manager loads and unloads drivers, performs status checking, manages multiple connection and heterogeneous databases.

## Design of Business Layer

Business layer involves lot of logic that is to be implemented in order to achieve the customer needs. Analysis is carried out for business layer objects. Hence the design for business layer has got a strong dependency with the model produced in the analysis phase.

The activities involved in Business Layer design are

2. Business Layer Class Design – apply design axioms for designing classes for business layer. Designing classes includes designing their attributes, methods and relationships.
  - I. Design/ Refine UML Class diagram developed in previous phase/ iteration.
    - i. Design/ Refine attributes (Use OCL)
      1. Add left out attributes
      2. Specify visibility, data type and initial value if any for attributes
    - ii. Design/ Refine Methods (Use OCL and UML Activity diagram)
      1. Add left out methods
      2. Specify visibility of the protocol (+, -, #)
      3. Specify the argument list and return type
      4. Design the method body using UML Activity diagram and OCL.
    - iii. Refine association
    - iv. Refine Generalization and aggregation.
    - v. Iterate and refine.

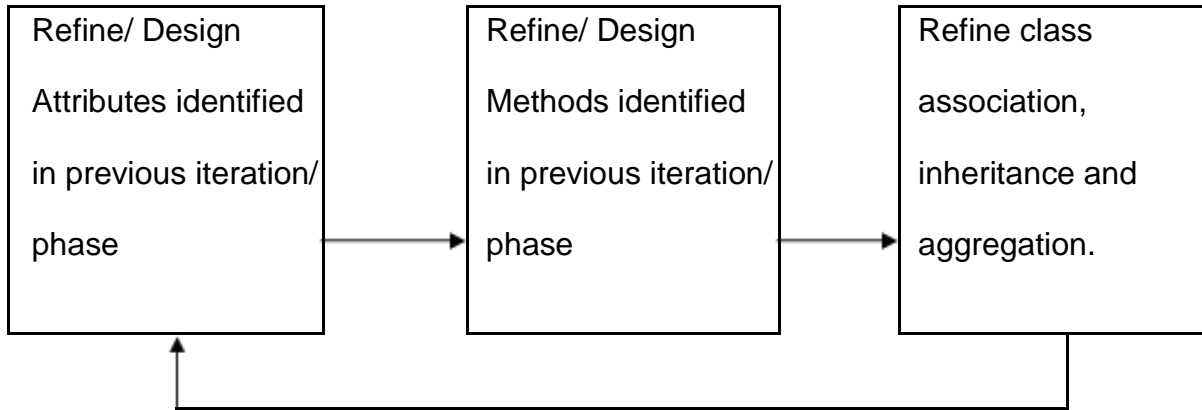

Refining Attributes:

Attributes represents the information maintained by each object. Complete list of attributes should be identified in order to maintain a complete set of information. Detailed information of attributes is not specified in analysis phase but in design phase.

OCL is used to represent the attribute details inside a class diagram/ notation.

Various types of attributes are

- 1) Single valued attributes – an attribute represents one value at a time.
- 2) Multi valued attributes – an attribute can store more than one value
- 3) Reference attributes – an attribute refers (alias) another instance.

OCL format for representing attributes:

The OCL specification for specifying attributes is

Visibility attribute name : type

OR

Visibility attribute name : type = initial value

E.g.

+ Name : String

- represents a public attribute Name of type String

# Name : String = "Hello"

- represents a protected attribute Name of type String with initial value Hello

[Note: Use the example from the case study]

Designing/ Refining Methods:

Designing methods involves design of Method protocol and Method body. A method protocol defines the rule for message passing to this particular object where the method body gives the implementation details. The types of methods provided by class are

- 1) Constructor – Method that is responsible for creating objects/ Method invoked during instantiating.
- 2) Destructor – The method that destroys instances/ Method invoked when an object is freed from memory.
- 3) Conversion Method – Methods responsible for converting one form of data to other form.
- 4) Copy Method – Methods responsible for copying information.
- 5) Attribute Set – Method responsible for setting values in attributes
- 6) Attribute Get – Method responsible for getting the values from an attribute
- 7) I/O Methods – Method responsible for getting and sending data from a device

- 8) Domain Specific – Those methods responsible for some functionality in a particular domain.

### Designing Protocol:

Protocol gives the rule for message passing between objects. Protocol is the interface provided by the object. Based on the visibility of the protocol it can be classified into

1. Public Protocol
2. Private Protocol
3. Protected Protocol.

Private protocols specify messages that can be send only by the methods inside the class.

They are visible only inside the class.

Protected protocols specify messages that can be send only by the methods inside the class.

But they can be inherited by the subclass.

Public protocols specify messages that can be send by the methods with in the class as well as objects outside the class.

Protocol and Encapsulation leakage – If protocols aren't well designed unnecessary messages are made available outside the class results in encapsulation leakage.

Internal layer contains the private and protected protocols where an External layer contains public protocols.

OCL Specification for Protocol Design:

The specification is

Visibility protocol name (argument list) : return type

Where argument list is arg1: type, arg2: type, arg3: type ...

argn: type E.g.

+ getName () : String

It's a public protocol named getName with no parameters and it returns a value of type String.

- setData (name : String, no : Integer) : Boolean

It is a private protocol that accepts 2 arguments one of type String and other of type Integer. It returns a value of type Boolean.

## Designing Method body:

UML Activity diagram along with OCL specification can be used for representing the body of the method. Activity diagram representing the method body says how the work should be done.

[Note: Use an activity diagram from case study]


## Design of Business Layer

Business layer involves lot of logic that is to be implemented in order to achieve the customer needs. Analysis is carried out for business layer objects. Hence the design for business layer has got a strong dependency with the model produced in the analysis phase.

The activities involved in Business Layer design are

3. Business Layer Class Design – apply design axioms for designing classes for business layer. Designing classes includes designing their attributes, methods and relationships.
  - I. Design/ Refine UML Class diagram developed in previous phase/ iteration.
    - i. Design/ Refine attributes (Use OCL)
      1. Add left out attributes
      2. Specify visibility, data type and initial value if any for attributes
    - ii. Design/ Refine Methods (Use OCL and UML Activity diagram)
      1. Add left out methods
      2. Specify visibility of the protocol (+, -, #)
      3. Specify the argument list and return type
      4. Design the method body using UML Activity diagram and OCL.
    - iii. Refine association

- iv. Refine Generalization and aggregation.
- v. Iterate and refine.

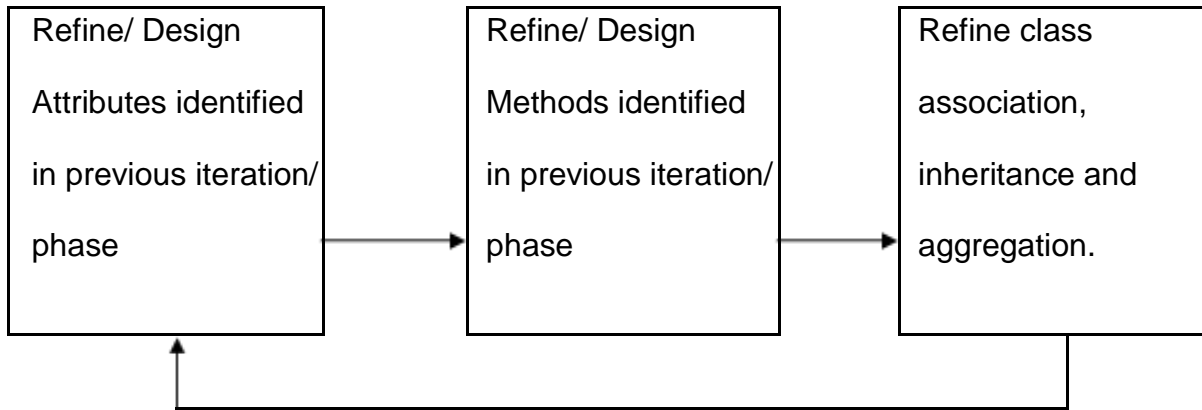

Refining Attributes:

Attributes represents the information maintained by each object. Complete list of attributes should be identified in order to maintain a complete set of information. Detailed information of attributes is not specified in analysis phase but in design phase.

OCL is used to represent the attribute details inside a class diagram/ notation.

Various types of attributes are

- 4) Single valued attributes – an attribute represents one value at a time.
- 5) Multi valued attributes – an attribute can store more than one value
- 6) Reference attributes – an attribute refers (alias) another instance.

OCL format for representing attributes:

The OCL specification for specifying attributes is

Visibility attribute name : type

OR

Visibility attribute name : type = initial value

E.g.

+ Name : String

- represents a public attribute Name of type String

# Name : String = "Hello"

- represents a protected attribute Name of type String with initial value Hello

[Note: Use the example from the case study]

Designing/ Refining Methods:

Designing methods involves design of Method protocol and Method body. A method protocol defines the rule for message passing to this particular object where the method body gives the implementation details. The types of methods provided by class are

- 9) Constructor – Method that is responsible for creating objects/ Method invoked during instantiating.
- 10)Destructor – The method that destroys instances/ Method invoked when an object is freed from memory.
- 11) Conversion Method – Methods responsible for converting one form of date to other form.
- 12)Copy Method – Methods responsible for copying information.
- 13)Attribute Set – Method responsible for setting values in attributes
- 14)Attribute Ger – Method responsible for getting the values from an attribute
- 15)I/O Methods – Method responsible for getting and sending data from a device

16) Domain Specific – Those methods responsible for some functionality in a particular domain.

Designing Protocol:

Protocol gives the rule for message passing between objects. Protocol is the interface provided by the object. Based on the visibility of the protocol it can be classified into

4. Public Protocol
5. Private Protocol
6. Protected Protocol.

Private protocols specify messages that can be send only by the methods inside the class.

They are visible only inside the class.

Protected protocols specify messages that can be send only by the methods inside the class.

But they can be inherited by the subclass.

Public protocols specify messages that can be send by the methods with in the class as well as objects outside the class.

Protocol and Encapsulation leakage – If protocols aren't well designed unnecessary messages are made available outside the class results in encapsulation leakage.

Internal layer contains the private and protected protocols where an External layer contains public protocols.

OCL Specification for Protocol Design:

The specification is

Visibility protocol name (argument list) : return type

Where argument list is arg1: type, arg2: type, arg3: type ...

argn: type E.g.

+ getName () : String

It's a public protocol named getName with no parameters and it returns a value of type String.

- setData (name : String, no : Integer) : Boolean

It is a private protocol that accepts 2 arguments one of type String and other of type Integer. It returns a value of type Boolean.


Designing Method body:

UML Activity diagram along with OCL specification can be used for representing the body of the method. Activity diagram representing the method body says how the work should be done.

[Note: Use an activity diagram from case study]

## Object Oriented Design


Software Design represents the logic of the software system providing more dependency to the computer domain than physical/ user domain. Design actually deals with “LOGIC TO IMPLEMENT IN PROGRAM TO ACHIEVE THE SYSTEM GOAL”

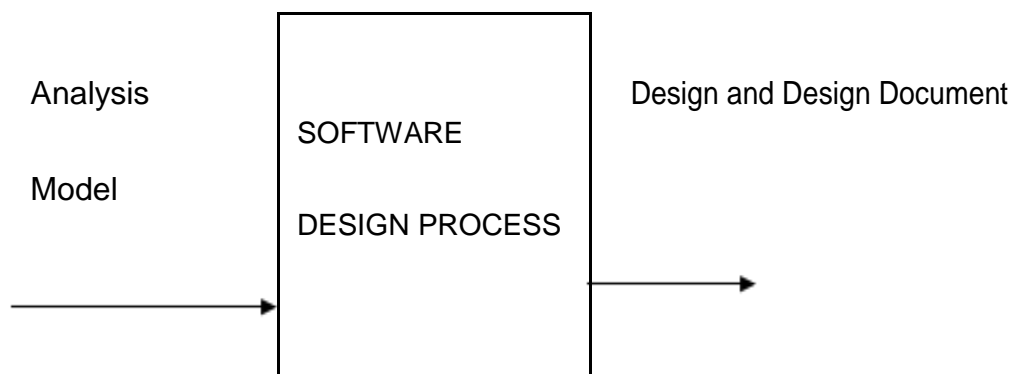


### I. SOFTWARE DESIGN PROCESS:

Software Design Process is the set of activities involved in developing a good and quality design.

This is a sub process of Software Engineering Process.

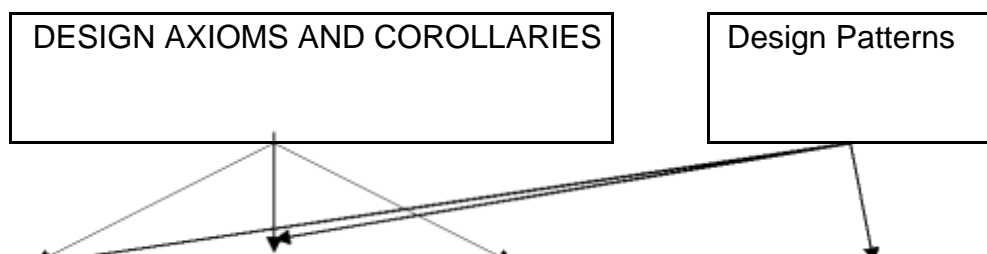

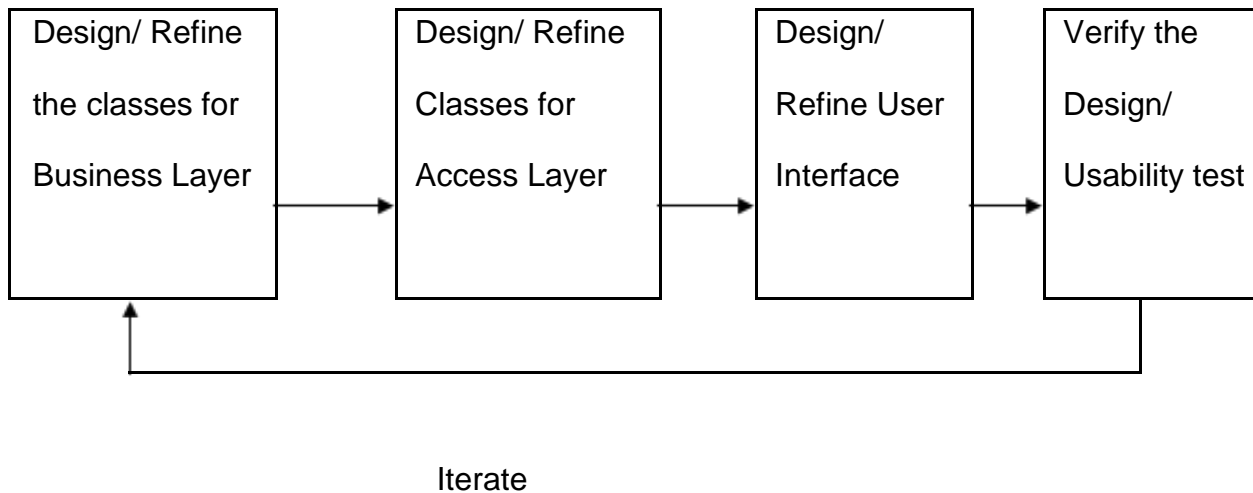

The above diagram shows the different sub phases in software design process.

Unified Approach suggests 3-tiered architecture. Since design has strongly dependency with implementation, the design should be carried out for these layers separately.

4. Business Layer Class Design – apply design axioms for designing classes for business layer. Designing classes includes designing their attributes, methods and relationships.
  - I. Design/ Refine UML Class diagram developed in previous phase/ iteration.

- i. Design/ Refine attributes (Use OCL)
  - 1. Add left out attributes
  - 2. Specify visibility, data type and initial value if any for attributes
- ii. Design/ Refine Methods (Use OCL and UML Activity diagram)
  - 1. Add left out methods
  - 2. Specify visibility of the protocol (+, - ,#)
  - 3. Specify the argument list and return type
  - 4. Design the method body using UML Activity diagram and OCL.
- iii. Refine association
- iv. Refine Generalization and aggregation.
- v. Iterate and refine.

## II. Design access layer

- i. Create mirror class for all classes identified in business layer.
- ii. Identify access layer class relationship
- iii. Simplify access layer classes and class relationship
  - 1. Remove redundant classes
  - 2. Single method classes can be removed and added in another class.
- iv. Iterate and refine.

## III. Design View Layer

- i. Design the macro level user interface – identify view layer objects
- ii. Design micro level user interface
  - 1. Design view layer objects by applying design axioms and corollaries.
  - 2. Build a prototype of view layer interface
- iii. Verify Usability and User Satisfaction

iv. Iterate and refine

5. Iterate and refine the above steps in necessary.

[Note: Explanation is given for 3 sub process separately. Example is given in CASE study of ATM system.]

## II. DESIGN AXIOMS AND COROLLARIES:

Axiom is a fundamental truth that has no exception or counter proof.

A corollary is one derived from axiom or another proves theorem.

These can be used in the software design for the following reasons

1. Making the design more informative and uniform.
2. Avoid unnecessary relationships and information.
3. Increase the quality.
4. Avoid unnecessary effort.

Axiom1    The independence axiom    Maintain independence of components/ classes/ activities

Axiom2    The information axiom    Minimize the information content of the design

Axiom1    The independence axiom

It says that when we implement one requirement of an user it should not affect the other requirement or its implementation. I.e., each component should satisfy its requirements without affecting other requirements.

E.g.

Requirement1:            Node1 should send multimedia files requested by the Node2.

Requirement2:            Node1 one should take minimum time for sending due to heavy traffic.

Consider the component C1 responsible for sending Multimedia files.

Choice 1: C1 reads the files and send the file header first and then the content in a byte stream. Here the component satisfies the first requirement where it fails to satisfy the second requirement.

Choice 2: C1 reads the files and compress the content and file header contains the file and compression information. Since the file size transferred is reduced this choice satisfies both requirements.

Axiom2    The information axiom


It deals with the simplicity and less information content. The fact is less number of information makes a simple design, hence less complex. Minimizing complexity makes the design more enhanced. The best way

to reduce the information content is usage of inheritance in design. Hence more information can be reused from existing classes/ components.

E.g.

Chioce1: (with out inheritance)

---

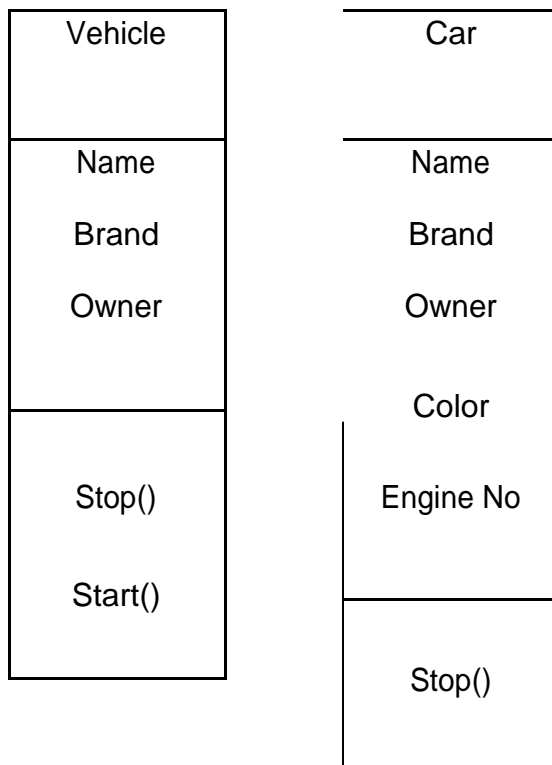


Class car maintains more information even though they are already maintained in vehicle class. Since car class maintains more information the design that contains the car class makes the design look more complex.

Vehicle    3 properties and 2 methods.

Car    5 properties and 3 methods.

### Chioce2 (with inheritance)

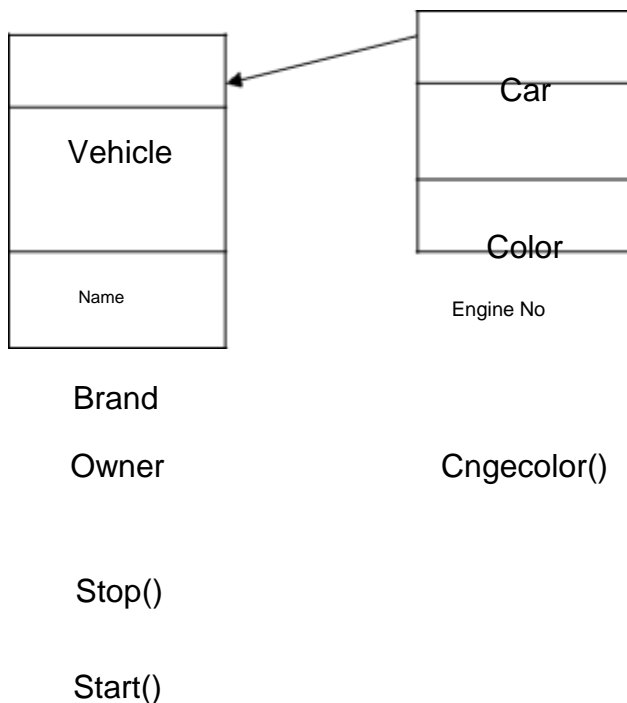


In this case the class car inherits some reusable methods and properties from vehicle class and hence it has to maintain 2 attributes and 1 method. Hence the class car looks simple.

### Corollaries:

Corollaries are derived from design axioms(rules). These corollaries are suggestions to the designer to create a quality design.

They are

1. Corollary 1Uncoupled Design with less information content (from Axiom1 and 2)
2. Corollary 2Single purpose classes (from Axiom1 and 2)
3. Corollary 3large number of simple classes (from Axiom1 and 2)
4. Corollary 4Strong Mapping (from Axiom 1)
5. Corollary 5Standardization (from Axiom 2)
6. Corollary 6Design with inheritance (from Axiom 2)

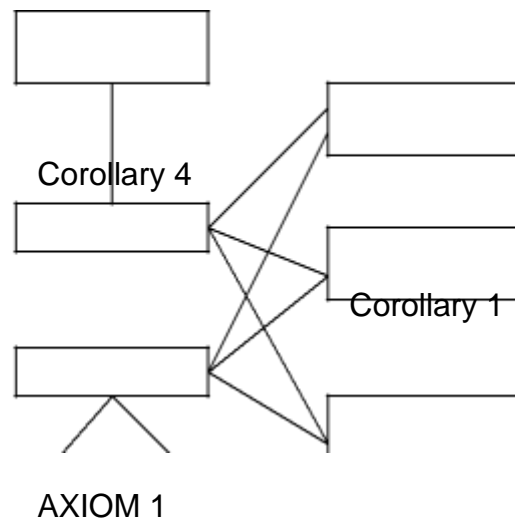

Corollary 2

AXIOM 1

Corollary 3

Corollary 1     Uncoupled design with less information content.

This corollary explains the concept of dependency by cohesion and coupling.

Cohesion is the dependency among the classes inside a component

Coupling the measure of dependency between 2 components.

Designers prefer design with

- 1) Low coupling between components
- 2) High cohesion among the classes inside a component.

Hence by reducing the strength of coupling between classes/ components reduces the complexity of the design.

**Coupling**     It's the measure of association established between 2 objects/ components. Designers prefer weak coupling among components because effect of change in one component should have less impact on the other component. The degree (strength) of coupling is the function of

1. How complicated the connection is?
2. Whether the connection refers to object itself or something inside the referred object
3. What message/ data is being send and received.

Interaction coupling exist between 2 objects if there is a message passing between those 2 objects.

The strength of interaction coupling depends on the complexity of messages passed between them.

Inheritance coupling exist between super and sub class. Inheritance coupling is desirable. Types of coupling

1. Content Coupling (Very High)
2. Common Coupling (High)
3. Control Coupling (Medium)
4. Stamp Coupling (Low)
5. Data Coupling (Very low)

Cohesion is the strength of dependency between classes within a component. More cohesion reflects single purpose of the class. Designers prefer strong cohesion among contents of the component.

#### Corollary 2 Single purpose

Each class should have a single well defined purpose and the aim of the class is to full fill that responsibility. If the class aims at implementing multi purpose subdivide the class into smaller classes.

#### Corollary 3 Large number of simpler classes for reusability

Complex classes are difficult to understand and hence for reuse needs more effort. Many times unnecessary members are reused as the super class was a complex one. The guideline says that “The

smaller are your classes, better your chances of reusing them in other projects.  
Large and complex classes are too specialized to be reused.”

#### Corollary 4 Strong Mapping

The designer, analyst and programmer should maintain strong dependency among the products obtained during the different phases of SDLC. Hence a class identified during the analysis is designed in

design phase and coded in implementation phase.

Designer should consider the programming language while creating design using technologies.

#### Corollary 5 Standardization

The Designer/ Programmer should be aware of the existing classes/ components available in the standard library. This knowledge will help the designer to reuse the existing classes and design the newly needed classes/ components. A class/ pattern repository is maintained to store all the reusable classes and

components. Even in most of the cases the repository is shared. Repository maintains the reusable components, description, commercial/ non commercial and usage.

#### Corollary 6 Design with Inheritance

[Note: Include inheritance , importance and need of inheritance, types with one example]

### OCL – Object Constraint Language:

It's a specification language used for representing properties of objects in an UML diagram.

It is English like language. The rules and semantics of the UML diagrams can be represented using

OCL. OCL specifications in UML diagrams make UML diagrams more clear and informative.

Sets, arithmetic expressions, Boolean expressions can be represented using OCL.

## OCL Specifications:

### 1. Item. Selector

Selector    Used to get the value of the attribute.

Item        Entity to which the attribute belongs to.

E.g.

Student1. No = 30

Student1 is the Item and no is the selector.

### 2. Item. Selector [qualifier value]

Selector    Used to identify a set of similar values.

Item        Entity to which the attribute belongs to.

Qualifier   specifies the particular value among the group.

E.g.

Student1. Mark [3]

Student1 is the Item, mark is the selector and 3 (qualifier) that represents 3<sup>rd</sup> mark

### 3. Boolean Expression

(Item1. Selector Boolean operation Item2.Selector)

E.g. S1. mark > S2. mark represents a Boolean value of true or false.

### 4. Set operation

Set select (Boolean expression) is used to select a group of objects that satisfies the Boolean expression.

Student select (mark >40) selects a list of students who has mark greater than 40.

### 5. Attribute specification

The OCL specification for specifying attributes is

Visibility attribute name : type

OR

Visibility attribute name : type = initial value

E.g.

+ Name : String

- represents a public attribute Name of type String

# Name : String = "Hello"

- represents a protected attribute Name of type String with initial value Hello

## 6. Protocol Design Specification

The specification is

Visibility protocol name (argument list) : return type

Where argument list is arg1 : type, arg2 : type, arg3 : type ... argn : type

E.g.


+ getName () : String

It's a public protocol named `getName` with no parameters and it returns a value of type `String`.

- `setData (name : String, no : Integer) : Boolean`

It is a private protocol that accepts 2 arguments one of type `String` and other of type `Integer`. It returns a value of type `Boolean`.

## 7. OCL in representing function call

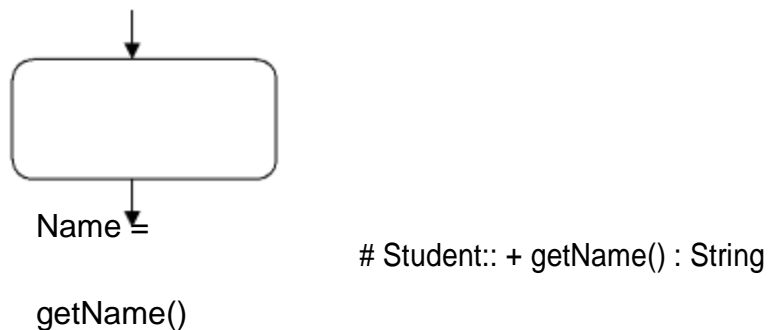

The activity diagram does not specify any details of `getName` where the OCL specification near the function call represents the clear idea about the method `getName`.

[Note: more examples should be added in each category]

## Designing View Layer Classes:

View layer objects are more responsible for user interaction and these view layer objects have more relation with the user where business layer objects have less interaction with users. Another feature of view layer objects are they deal less with the logic. They help the users to complete their task in an easy manner.

The Major responsibilities of view layer objects are

1. Input – View Layer objects have to respond for user interaction. The user interface is designed to translate an action by the user (Eg. Clicking the button) in to a corresponding message.
2. Output - Displaying or printing information after processing.

View Layer Design Process:

1. Macro Level UI Design Process
  - a. Identify classes that interact with human actors
  - b. A sequence/ collaboration diagram can be used to represent a clear picture of actor system interaction.

- c. For every class identified determine if the class interacts with the human actor. If so
  - i. Identify the view layer object for that class.
  - ii. Define the relationship among view layer objects.
- 2. Micro Level UI Design Process
  - a. Design of view layer objects by applying Design Axioms and Corollaries.
  - b. Create prototype of the view layer interface.
- 3. Testing the usability and user satisfaction testing.
- 4. Iterate and refine the above steps.

[Note: Explain the above process for an essay]

## User Interface Design Rules:

### UI Design Rule 1: Making the interface simple

For complex application if the user interface is simple it is easy for the users to learn new applications. Each User Interface class should have a well define single purpose. If a user cannot sit before a screen and find out what to do next without asking multiple questions, then it says your interface is not simple.

### UI Design Rule 2: Making the Interface Transparent and Natural.

The user interface should be natural that users can anticipate what to do next by applying previous knowledge of doing things with out a computer. This rule says there should be a strong mapping and users view of doing things.

UI Design Rule 3: Allowing users to be in control of the Software.

The UI should make the users feel they are in control of the software and not the software controls the user. The user should play an active role and not a reactive role in the sense user should initiate the action and not the software.

Some ways to make put users in control are

1. Make the interface forgiving.
2. Make the interface visual.
3. Provide immediate feedback.
4. Avoid Modes.
5. Make the interface consistent.

Purpose of View Layer Interface - Guidelines

## Unit – V

Software Quality Assurance Testing:

Bugging and Debugging - Related to Syntax Errors.

Testing – Related to Logical, Interface and communication errors.

Testing – for assuring quality. (In general)

Software Quality Assurance Testing – For Satisfying the Customer – Give more importance to testing the Business Logic and less importance to satisfaction of the user.

User Interface Testing – Usability and User Satisfaction – More importance is given to the easiness of the User Interface and less importance to the logic.

Quality Assurance Testing

- Error Based Testing
  - Methods are tested with some valid and invalid parameters
  - Boundary Tests

Methods are tested with boundary values of the parameters. The boundary values are

- - ve value (if applicable)
- Minimum Value – 1
- Minimum Value
- Medium Value
- Maximum Value – 1
- Maximum Value
- Maximum Value + 1 etc etc
- Testing Strategies
  - Black Box Testing.
  - White Box Testing.
  - Top down Approach.
  - Bottom up Approach.

(Note: Refer SE notes/ Pressman book)

- Impact of OO on Testing
  - Impact of Inheritance

It is not necessary to test Inherited Methods because its already been verified in the Base class.

But if the inherited method is over rided then the behavior may change and it is needed to be tested.

(Note: Explain with an example)

- Reusability of Test Cases

Test Cases can be reused based up on the level of reusage Overridden methods show a different behavior.

If the similarities in behavior exist test cases can be reused.

In some cases Inherited method accept same parameter as Base but different behavior.

In the above case a test case can be reused such a way that the expected o/p of the test case is changed and used.

- Test Cases

Test cases represents various testing scenarios.

A good test case is one which has a high probability of detecting an undiscovered error.

A successful test case is one that can detect an undiscovered error. Guidelines

- Describe which feature the test attempt to cover
- If scenario based then develop test case based on Use case
- Specify what feature is going to be tested and what is the input/parameters and expectations
- Test the normal usage of that object
- Test abnormal reasonable usage
- Test abnormal unreasonable usage
- Test boundary conditions
- Document the cases for next iteration

- Test Plan

Objectives of the Test – Create the objectives and describe how to achieve them

Development of Test Case – Develop test data, both input and expected output  
Test Analysis – Analysis of test case and documentation of test results.

- Guidelines for developing Test Plans

Develop test plan based on the requirements generated by the user.  
It should contain the schedule and list of required resources.

Determine the strategy (Black box, white box etc.) document what is to be done.

SCM (Software Configuration management or Change control) activities should be considered when ever a change is made due to a test result.

Keep the plan up to date.

Update documents when a mile stone is reached.

- Continuous Testing

Since UA suggests iterative development continuous testing is advisable for efficient management of resource.

Testing is also carried out for each iteration of development.

- Myer's bug location and debugging principles.

- Bug Locating Principles  
Think

If you reach an impasse (deadlock) sleep on it.

If impasse still remains discuss the problems to some one else ○ Debugging Principles

Where there is one bug there is likely to be another Fix the error and not the symptom

The probability of correctness of the solution decreases when the program size increases.

Beware that error correction should not create more number of errors.

Example Format

For example..fill out the categories for any object

#### Test plan

1. Project Name:
2. Team Name:
3. Test Team Details:
4. Shedule:
5. Object/ Class under testing:
6. List of Methods:
7. Test Cases for Each  
Method. a. Method1
  - i. Test Case 1
  - ii. Test Case 2
  - iii. ..
  - iv. Test Case Nb. Method2
  - i. Test Case 1
  - ii. Test Case2
  - iii. ..
  - iv. Test Case N

## ONLINE QUESTIONS

### UNIT-I

QUESTIONS	OPT1	OPT2	OPT3	OPT4	OPT5	OPT6	ANSWER
The entities of the physical world are called _____	Physical Entities	Objects	Real Entities	Methods			Objects
The mechanism by which the data and functions are bound together within an object is called as _____	Encapsulation	Inheritance	Polymorphism	Class			Encapsulation
_____ supports the concept of OOP	C++	VB	Java	Oracle			C++
_____ increases flexibility by permitting the addition of a new class of objects without modifying existing code	Dynamic binding	Polymorphism	Inheritance	Class			Dynamic binding
Advantage of OOPs has important technology for building	Simple hardware system	Simple software system	Complex software system	Complex hardware system			Complex software system
Using a single function name to perform different types of tasks is known as	Encapsulation	abstraction	polymorphism	Inheritance			polymorphism
In inheritance, super class is also known as _____	Parent Class	Friend Class	Child Class	Sub Class			Parent Class
----- is a mechanism that associates the code and data it manipulates into a single unit.	Encapsulation	Abstraction	Polymorphism	Inheritance			Encapsulation
The process of invoking an operation on an object is referred to as -----	Message Passing	Function Overloading	Operator Overloading	Virtual Function			Message Passing
The phenomenon where the object outlines the program execution time and exists between execution of a program	Persistence	Genericity	Extensibility	Delegation			Persistence

is known as-----							
The technique for defining the declaration of data items without specifying this exact data type is known as-----	Delegation	Message Passing	Genericity	Persistence			Genericity
The object's internal structure is totally hidden from the user is called as-----	Inheritance	Data Encapsulation	Polymorphism	Class			Data Encapsulation
The data in a class are also called	Members	Instance Variables.	Fields.	Variables			Members
Action modules that process data in class is called	Recursive Function	Member Function	Class variables	Instances of a class			Member Function
A class is a _____	derived data type	basic data type	user defined data type	primitive data type			user defined data type
In object oriented programming a class of objects can _____ properties from another class of objects	Utilize	Borrow	Inherit	Adapt			Inherit
Which of the following are class relationships in inheritance ?	is-a relationship.	Part-of relationship.	Use-a relationship.	All of these options.			is-a relationship.
Which of the following represents relationships in Delegation ?	is-a relationship.	Part-of relationship.	Use-a relationship.	All of these options.			Part-of relationship.
Which are the main three features of OOP language?	Data Encapsulation, Inheritance & Exception handling	Inheritance, Polymorphism & Exception handling	Data Encapsulation, Inheritance & Polymorphism	Overloading, Inheritance & Polymorphism			Data Encapsulation, Inheritance & Polymorphism
When a language has the capability to produce new data type, it is called	Extensible	Overloaded	Encapsulated	Reprehensible			Extensible

State the object oriented languages	C++	Java	Eiffel	All the above			All the above
Overload function in C++	a group function with the different name	all have the same number and type of arguments	functions with same name and different number and type of arguments	All of the above			functions with same name and different number and type of arguments
Operator overloading is	making c++ operators works with objects	giving new meaning to existing c++ operators	making new c++ operator	both making c++ operators works with objects & giving new meaning to existing c++ operators			both making c++ operators works with objects & giving new meaning to existing c++ operators
A class is a collection of _____	data structure	methods	objects	all the above			objects
_____ are created by run time system.	class	object	function	all the above			object
_____ can be abstract. _____ can not be abstract.	object , class	class ,object	constructor ,destructor	destructor, constructor			class ,object
Objects communicate with each other or interact among themselves by _____	dynamic linking	binding	message-passing	none of the above			message-passing
_____ represents one or more conceptual connections between objects	Association	Aggregation	both Association & Aggregation	none of the above			Association
Specialization is also called _____ relationship.	“has – a “	“part –of”	“one-one”	“is-a”			“is-a”
A class that cannot be instantiated is called _____	meta class	drived class	abstract class	none of the above			abstract class
The protected data members are visible in its _____	own class and its derived class	own class	any where in the program	none the above			own class and its derived class

_____ is/are a pure object oriented language .	C++	smalltalk	java	c#			java
The method of design encompassing the process of object oriented decomposition and a notation for depicting both logical and physical and as well as static and dynamic models of the system under design is known as:	Object-Oriented Programming	Object-Oriented Design	Object-Oriented Analysis	None of the mentioned			Object-Oriented Design
What is the programming style of the object oriented conceptual model?	Invariant relationships	Algorithms	Classes and objects	Goals, often expressed in a predicate calculus.			Classes and objects
The essential characteristics of an object that distinguish it from all other kinds of objects and thus provide crisply defined conceptual boundaries, relative to the perspective of the viewer is called:	Encapsulation	Modularity	Hierarchy	Abstraction			Abstraction
Abstraction is classified into _____ types	4	3	2	1			4
The process of compartmentalizing the elements of an abstraction that constitute its structure and behavior is called as	Hierarchy	Encapsulation	Modularity	Entity Abstraction			Encapsulation
Single inheritance, Multiple inheritance, and Aggregation comes under _____	Modularity	Typing	Hierarchy	None of the mentioned			Hierarchy
In which of the following mechanisms, types of all variables and expressions are	Strong Typing	Weak Typing	Static Binding/ early binding	Dynamic Binding/ late binding			Static Binding/ early binding

fixed at compilation time.							
In which of the following mechanisms, types of all variables and expressions are not known until runtime	Strong Typing	Weak Typing	Static Binding/ early binding	Dynamic Binding/ late binding			Dynamic Binding/ late binding
Which of the following statements about Persistence is correct?	It is the enforcement of the class of an object, such that objects of different types may not be interchanged, or at the most they may be interchanged only in very restricted ways.	It is the property of an object through which its existence transcends time and/or space.	It is the property that distinguishes an active object from one that is not active.	All of the mentioned			It is the property of an object through which its existence transcends time and/or space.
What is that concept in type theory in which a single name may denote objects of many different classes that are related by some common super class referred to _____	Monomorphism	Type Checking	Polymorphism	Generalization			Polymorphism
Object oriented technology is built upon a sound engineering foundation, whose elements are collectively called as _____	Von Neumann Model	Object Model	Structured Model	Programming Model			Object Model
Which of the following programming language are object oriented in	Smalltalk and Simula	FORTAN and ALGOL	C and Ada	Perl and Python			Smalltalk and Simula

nature							
Callback is an operation provided by	Inheritance	Encapsulation	Modularity	Abstraction			Abstraction
reader, :writer or :accessor are the slot options in	Smalltalk	LISP	Object Pascal	CLOS			CLOS
Dependencies among files can then be asserted using the macro	#define	#undef	#include	#endif			#include
Inheritance is an example of which type of hierarchy	Class Structure	Object Structure	Both	None of the mentioned			Class Structure
Superclass represents _____ abstractions	Generalized abstractions	Specialization abstractions	Both	None of the mentioned			Generalized abstractions
Subclass represents _____ abstractions	Generalized abstractions	Specialization abstractions	Both	None of the mentioned			Specialization abstractions
_____ is the property that distinguishes an active object from one that is not active.	Persistence	Typing	Aggregation	Concurrency			Concurrency
Which of the following statements about object model is true? I. Object model encourages the reuse of software and entire design of the application. II. Object model produces systems that are built upon stable intermediate forms. III. Object model reduce the inherent in developing complex systems. IV. None of the mentioned	I, III	I, II	I, II, III	IV			I, II, III

1) Which of the following property is associated with objects?	State	Behavior	Identity	All of the mentioned			All of the mentioned
Which of the property of a object encompasses all of the (usually static) properties of the object plus the current (usually dynamic) values of each of these.	Semantics	Behavior	State	Identity			State
Which of the following object types are generally autonomous, meaning that they can exhibit some behavior without being operated upon by another object	Passive	Active	Both Passive and Active	None of the mentioned			Active
A _____ is a description of a set of objects that share the same attributes, operations, relationships, and semantics.	Structure	Class	Constructor	Function			Class
A _____ is a special member function whose task is to initialize the objects of its class.	Construct or	Destructor	Selector	Iterator			Constructor
Which of the following statements about a constructor is not true?	We cannot refer to their addresses.	They cannot be inherited, though a derived class can call the base class constructor .	An object with a constructor can be used as a member of a union.	Constructors cannot be virtual.			An object with a constructor can be used as a member of a union.
The constructors that can take arguments are called _____	Default Construct or	Copy Constructor	Parameterized Constructor	Dynamic Constructor			Parameterized Constructor

When an object is created and initialized at the same time, a _____ constructor gets called.	Inline Construct or	Copy Constructor	Default Constructor	Parameterized Constructor			Copy Constructor
--	---------------------	------------------	---------------------	---------------------------	--	--	------------------

## UNIT-II

QUESTIONS	OPT1	OPT2	OPT3	OPT4	OPT5	O P T 6	ANSWER
Test methods within each object_____	unit testing	integration testing	system testing	acceptance testing			unit testing
A function that has access to the private member of the class but is not itself a member of the class is called as	private member function	inline function	friend function	protected function			friend function
It is necessary that a constructor in a class should always be _____	private	public	protected	in main()			public
Size of an object is equal to _____	size of data members only	size of member functions only	sum of the size of data member and member functions	none			sum of the size of data member and member functions
.....method is good for producing user-driven analysis model	Rumbaughetal	Jacobson	Booch	Shaler/mellor			Jacobson
.....method produce detail object oriented design models	Rumbaugh-etal	Jacobson	Booch	Coad/yardon			Jacobson
which of the following model is not a OMT parts?	object model	static model	dynamic model	functional model			static model
a process description and consumer-producer relationships can be expressrd using	object model	OMT static model	OMT dynamic model	OMT functional model3			OMT functional model3

.....							
The object modeling technique(OMT) is a .....	simple	fast	intuitive	network of states			intuitive
.....is not a complete and has no actor that initiate it is used by another use case	abstract	concrete	single	none of the above			abstract
..... Defines the outside and inside of the system behavior	Use case	domain	analysis	test			Use case
a “pattern in waiting” which is not yet known to recur, sometime is called .....	generation pattern	nongeneration pattern	antipattern	protopattern			protopattern
..... describes recurring phenomena without necessarily saying how to reproduce them	generation pattern	nongeneration pattern	antipattern	protopattern			nongeneration pattern
the process of looking for patterns to document is called .....	protopattern	antipattern	pattern mining	framework			pattern mining
..... Is a set of cooperating classes that make up a reusable design for specific classes that mark up a reusable design for a specific class of software	pattern	framework	unified approach	none of the above			framework
a definition of an object oriented software framework is given by	gamma et al	rambaugh et al	booch	jacobson			gamma et al
.....is the process of extracting the needs of a system and what the system must do to satisfy the	use case driven development	object oriented analysis	object oriented design	continuous testing			object oriented analysis

requirements							
the user interface layer also called .....	access layer	business layer	view layer	dynamic layer			view layer
the user interface layer objects are identified during .....	use-case driven development	object oriented design	incremental development	none of the above			incremental development
.....contains objects that know how to communicate with the place where the data actually reside	access layer	business layer	user interface layer	none of the above			access layer
..... are a way of delivering application development patterns to support best practice sharing during application development	patterns	frameworks	unified approaches	protopattern			frameworks
..... have a strong method for producing object model	rambangh et al	jacobson	booch	oad			rambangh et al
.....allow iterative development by allowing you to go back and forth between design and modeling	framework	pattern	unified approach	none of the above			unified approach
which of the following is not a OMT phases?	analysis	object design	implementation	testing			testing
in OMT data flow diagram ..... symbol is used to identify the source or destination of a data element	process	dataflow	data store	external entity			external entity
..... is a description of the day to day activities by a single or small group of software	business process	micro development process	macro development process	software development process			micro development process

developers process							
..... Is an abstract representation of a system construct to understand the system prior to building or modifying it	model	object	class	none of the above			model
the process of determining at runtime which function to invoke is termed as .....	static binding	dynamic binding	object persistence	meta class			dynamic binding
A class is a collection of .....	data structure	methods	objects	all the above			objects
..... are created by run time system.	class	object	function	all the above			object
..... can be abstract. ..... can not be abstract.	object , class	class ,object	constructor ,destructor	destructor, constructor			class ,object
Objects communicate with each other or interact among themselves by .....	dynamic linking	binding	message-passing	none of the above			message-passing
..... represents one or more conceptual connections between objects	Association	Aggregation	both a & b	none of the above			Association
Specialization is also called ..... relationship.	"has – a "	"part –of"	"one-one"	"is-a"			"is-a"
A class that cannot be instantiated is called .....	meta class	derived class	abstract class	none of the above			abstract class
The protected data members are visible in its .....	own class and its derived class	own class	any where in the program	none the above			own class and its derived class

_____ is/are a pure object oriented language .	C++	smalltalk	java	c#			java
Test methods within each object _____	unit testing	integration testing	system testing	acceptance testing			unit testing
The Library programs a written	for routines that are repetitions	for routines that are difficult to type	for routines that are difficult to solve	none of the above			for routines that are repetitions
which one the following is not a utility program	text editors	debugging aids	compiler	I/O routines			compiler
System software that helps the user to correct logical mistake	utility program	memory dump	Debugging acids	library programs			Debugging acids
the program of placing jobs in a queue for execution is called	Batch programming	spooling	queuing	Multitasking			spooling
A Shareware is a	share program	text editor	an account package	package			text editor
A Realtime system	completes the task in given time	completes the task in very short time	completes the task after given time interval	is time consuming program			completes the task in given time
An arrangement in which analysis assigns a group of analysts to survey a specific system is	project oriented	pool oriented	functional	Team Oriented			functional
The three stage model described by Bowman,davis and wetherbe	Analysis,design,implementation	planning,analysis,implementation	planning,analysis,resource allocation	planning,analysis,design			planning,analysis,resource allocation
technical writer are employed	before investigation	at the time of analysis	at the time of programming	when the candidate system nears completion			when the candidate system nears completion
the _____ dimension tells whether the primary concern is strategic,magerial or	time	focus	MIS	Analysis			focus

operational							
Which of the following is not a part of the feasibility study	data collection	cost estimates	evaluation of existing system	Analysis of candidate system			data collection
which of the following constitutes a pictorial language	flow chart	algorithms	pseudocode	program			flow chart
the techniques of writing a good program forms part of the	analysis of algorithm	software engineering	design of algorithms	operating system			software engineering
Flow system models shows the flow of	money,goods,power	material,goods,data	money,material,information	material,energy,information			material,energy,information
A structured program generally has	compact looks	Redundant codes	many inputs	many outputs			Redundant codes
A good module should have	one entry and one exit	one entry and many exit	many entry and one exit	many entry and many exit			one entry and one exit
software engineering primary aims on	reliable software	cost effective software	reliable and cost effective software	none of the above			reliable and cost effective software
A directed dashed line represents _____ relationship.	Message	Association	Dependency	none of the above			Dependency
A dashed line with hollow arrowhead represents _____ relationship.	realization	association	dependency	generalization			realization
A _____ allow us to you to create new kind of building blocks derived from existing one.	tagged value	stereotype	interface	class			stereotype
A tagged value extends the _____ of a UML building block.	vocabulary	properties	semantic	definition			properties
A constraint extends the _____ of a UML building block.	vocabulary	properties	semantic	definition			semantic

### UNIT-III

QUESTIONS	OPT1	OPT2	OPT3	OPT4	OPT5	OPT6	ANSWER
in object oriented design of software, which of the following is not true?	object inherit the properties of the class	classes are defined based on the attributes of objects	an object can belong to two classes	classes are always different			an object can belong to two classes
the system in term of inputs and outputs is defined under the concepts of	system analysis	system design	black box	environment			black box
designing phase will usually be	top down	bottom up	random	centre fringing			top down
design phase includes	data, architectural and procedural design only	architecture, procedural and interfacedesign only	data, architectural and interface designs only	data, architectural, interface and procedural designs			data, architectural, interface and procedural designs
In object oriented design of software object have	attributes and name only	operations and name only	attributes, name and operations	none of the above			attributes, name and operations
A constructor is called whenever	an object is declared	an object is used	a class is declared	a class is used			an object is declared
Choose the correct statement	a destructor is inherited	a constructor cannot be virtual	a destructor can be virtual	a constructor is not inherited			a constructor cannot be virtual
Class Dog: public X, public y is an instance of	multiple inheritance	repeated inheritance	linear inheritance	none of the above			multiple inheritance
Which of the following operators cannot be overloaded?	>>	?:	+	no such operator exist			?:

A model is an abstract representation of a system, constructed to understand the system prior to building or modifying it.	model	system	language	structure			model
Most modelling techniques used for analysis and design involve ____.	conceptual model	graphic language	symbols	descriptive text			graphic language
_____ can be viewed as a snapshot of a system's parameters at rest or at a specific point in time	dynamic model	test model	static model	implementation model			static model
A _____ is a collection of procedures or behaviours, reflect the behaviour of a system over time	domain object model	use case model	static model	dynamic model			dynamic model
_____ is a specification language that uses simple logic for specifying the properties of a system.	UML	OMT	OCL	DFD			OCL

A class diagram is a collection of _____ modelling element.	object	static	use case	implementation			static
A _____ is an association attribute.	Multiplicity	Qualifier	Generalization	composition			Qualifier
_____ specifies the range of allowable associated classes.	navigation	navigability	multiplicity	associations			multiplicity
An _____ is an association among more than two classes.	or-association	is-a relationship	a-part of association	n-ary association			n-ary association
_____ show the configuration of run-time processing elements and the software components.	collaboration diagram	sequence diagram	component diagram	deployment diagram			deployment diagram
A _____ is a grouping of model elements.	component	package	folder	packet			package
_____ represents a situation in which a change to the target element may require a change to source element in dependency	model dependency	information dependency	component dependency	deployment dependency			model dependency

A _____ is a graphic symbol containing textual information.	model	symbol	note	Datatype			note
_____ represents a built-in extensibility mechanism of UML.	model	stereotypes	swimlane	flow			stereotypes
Actions may be organized into _____	meta model	crosslanes	swimlane	attribute			swimlane
Packages can be used to designate not only logical and physical grouping but also _____.	component s	elements	metamodel	use case group			use case group
The _____ may be used for the upper bound ,denoting an unlimited upper bound.	#	*	&	?			*
Each action in activity diagram is assigned to _____ swimlane.	three	two	one	four			one
A _____ is an alternative way to understand the overall	Sequence diagram	Collaboration diagram	Activity diagram	State chart diagram			Sequence diagram

flow of the control of a program.							
The _____ relationship is used when there is more than one use case that is similar to another use case but does a little more.	communication	extends	corresponds	uses			extends
The purpose of _____ is to understand the algorithm involved in performing a model.	interaction diagram	activity diagram	statechart diagram	interaction diagram			statechart diagram
Each swim lane is separated from neighboring swimlanes by _____ lines on both sides.	cross	vertical	horizontal	dashed			vertical
A modelling language must include _____	notations and model elements	guidelines	both notations and model elements and guidelines	only notations and model elements			both notations and model elements and guidelines
The disadvantage of _____ is that they are great only for representing a	interaction diagram	collaboration diagram	both interaction diagram and collaboration diagram	state chart diagram			interaction diagram

single sequential process.							
_____ is a form of association.	Generalization	composition	aggregation	navigation			aggregation
A constraint is used to _____ rules of a UML building block.	add	modify	both add and modify	none			both add and modify
The architecture of a software-intensive system can be described by _____ views.	three	five	nine	none			five
Which view doesn't represent a software-intensive system?	class	use case	implementation	deployment			class
A use case view represents _____ aspects of the view.	static	dynamic	both static and dynamic	none			both static and dynamic
The _____ view addresses the performance, scalability and throughput of the system.	use case	process	implementation	design			process
The _____ view addresses the configuration management of the system's	use case	process	implementation	design			implementation

releases.							
The _____ view addresses the distribution, delivery and installation of the parts that make up of the physical system.	use case	process	implementation	None			None
A _____ is a contract or an obligation of a class.	constraint	note	responsibility	none			responsibility
_____ relationship is used to model an inheritance.	specialization	generalization	dependency	none			generalization
A line with a solid diamond represents _____ relationship.	specialization	generalization	aggregation	composition			composition
A link can be viewed as a subset of _____.	generalization	association	both generalization and association	none			association
A _____ diagram emphasizes the structural organization of the objects that send and receive messages.	sequence	activity	use case	collaboration			collaboration
In UML diagram of a class	state of object cannot be represented	state is irrelevant	state is represented as an attribute	state is represented as a result of an operation			state is represented as an attribute

Attributes are assigned value	when operations are performed on an object	when instances of objects are defined	when methods are invoked	when classes are identified			when instances of objects are defined
In object-oriented design	operations and methods are identical	methods specify algorithms whereas operations only state what is to be done	methods do not change values of attributes	methods and constructor are same			methods specify algorithms whereas operations only state what is to be done
Each swimlane represents responsibility for part of the overall activity and may be implemented by one or more _____	Class	Model	Graph	Object			Object
The two types of implementation diagrams are _____	activity diagram	deployment diagram	component diagram	both deployment diagram and component diagram			both deployment diagram and component diagram
A _____ is similar to a Petri diagram, where a token represents an activity diagram.	statechart diagram	collaboration diagram	activity diagram	deployment diagram			statechart diagram
An activity is shown as a _____, containing the name of the operation.	Rectangle	Ellipse	round box	decision box			round box

When an activity symbol appears within a state symbol, it indicates the _____ of an operation.	Execution	termination	both a and b	only			Execution
_____ is the process of transforming a problem definition from a fuzzy set of facts and myths into a coherent statement of a system's requirements.	Analysis	Design	Testing	None			Design
The _____ are external factors that interact with the system,	Use cases	class diagram	actors	activity diagram			actors
_____ are scenarios that describe how actors use the system.	class diagram	activity diagram	Interaction diagram	Use cases			Use cases
_____ is a special flow of events through the system.	Use cases	activity diagram	Interaction diagram	Sequence diagram			Use cases
A _____ is an atomic set of activities that are performed either fully or not at all.	Transformation	A measurable value	Transaction	Design			Transaction

The _____ association is used when you have one use case that is similar to another use case but does a bit more or is more specialized.	Uses	extends	class	Hierarchy			extends
--	------	---------	-------	-----------	--	--	---------

#### UNIT-IV

QUESTIONS	OPT1	OPT2	OPT3	OPT4	OPT5	OPT6	ANSWER
The _____ association occurs when you are describing your use cases and notice that some of them have sub flows in common	Uses	extends	class	Hierarchy			Uses
_____ use case is not complete and has no initiation actors.	Concrete	static	dynamic	abstract			abstract
Each use case has _____ main actor	One	two	three	four			One
A _____ can serve as an initial understanding of the requirements	Analysis	Design	Testing	Document			Document
_____ is the specification of the number of occurrences of one object related to occurrences of another object	super class	sub class	objects	operations.			operations.
_____ serve as input for creation of other modeling elements.	scenario-based elements	class based elements	behavioural elements	flow-oriented elements.			scenario-based elements

_____ diagram represents the actions and decisions that occur as some function is performed.	UML swim lane diagram	UML activity diagram	relational diagram	none			UML activity diagram
_____ diagram represents the flow of actions & decisions and indicates which actors perform each.	UML swim lane diagram	UML activity diagram	relational diagram	none			UML swim lane diagram
The DFD is presented in a _____ fashion.	structural	functional	operational	hierarchical			hierarchical
The data-flow modeling is a core modeling activity in analysis.	controlled	nested	structured	complex			structured
_____ continuity must be maintained as each DFD level is refined.	informational flow	data flow	functional flow	none			informational flow
_____ can be used to assess the simplicity of function .	validation	specification	cohesion	variation			cohesion
_____ represents the behavior of the system.	monitor specification	monitoring system	control specification	control system			control specification
_____ is used to describe all flow model processes that appear at the final level of refinement.	monitor specification	process specification	monitor specification	none			process specification
_____ are set of attribute defined for potential class and applied to all instructions of class.	common-attribute	multiple-attribute	retained information	needed service			common-attribute
_____ defined a relationship between classes.	associations	collaborations	relations	operations			associations
_____ diagram represents behavior by describing how classes move from state to state	state	use case	sequence	none			sequence
_____ must occur to force an object to	sequence	instance	operation	trigger.			trigger.

make a transition from one active state to another.							
_____ establish the context of the problem and overall function of the system.	places	structures	roles	events			places
A class has state that represent its behavior as the sys performs its .	operations	functions	unions	none			functions
Which task is performed during use-case realization refinement?	identify participating classes	allocate responsibilities among classes	model messages between classes	model associated class relationships			model associated class relationships
Which process document describes design mechanisms, any mappings between design mechanisms, and the details regarding their use?	Software Architecture Document	Design Guidelines	Vision Document	Software Development Plan			Vision Document
In the state of a state machine, a behavior can be defined _____.	before reaching a state	upon reaching a state	upon leaving a state	inside a state			inside a state
When identifying design elements, a simple analysis class will map to a(n)_____.	active class	interface	design class	subsystem			design class
In which OOAD activity is the distribution mechanism identified?	Identify Design Elements	Identify Design Mechanisms	Class Design	Architectural Analysis			Identify Design Mechanisms
Identify Design Elements is part of which workflow detail?	Define a Candidate Architecture	Design Components	Perform Architectural	Refine the Architecture			Design Components
Object-oriented system modelling using CRC method gives	Java programs for the system	C++ programs for the system	Classes of the system, their responsibilities and	Objective C programs for the system			Classes of the system, their responsibilities

			collaborating classes				ties and collaborating classes
A class is	a group of objects	template for objects of a particular type	a class of objects	a classification of objects			template for objects of a particular type
The expansion of the acronym CRC is	Collecting Responsibilities Classes	Collaborating with Relevant Classes	Class Responsibilities and Collaborators	Creating Relevant Classes			Class Responsibilities and Collaborators
When a subclass is created using inheritance the resulting class	may have only attributes of parent class	may have only operations of parent class	may have new operations only in addition to those in parent class	may have new attributes and new operations in addition to those of the parent class			may have new attributes and new operations in addition to those of the parent class
An object is selected for modelling a system provided	its attributes are invariant during operation of the system	its attributes change during operation of the system	it has numerous attributes	it has no attributes relevant to the system			its attributes change during operation of the system
Multiplicity is the same as what concept for an ERD?	Relationship	Attribute	Entity	Cardinality			Cardinality
Composition is a stronger form of which of the following?	Aggregation	Encapsulation	Inheritance	All of the above.			Aggregation
An abstract class is which of the following?	A class that has direct instances, but whose descendants may have direct instances.	A class that has no direct instances, but whose descendants may have direct instances.	A class that has direct instances, but whose descendants may not have direct instances.	A class that has no direct instances, but whose descendants may not have direct instances			A class that has no direct instances, but whose descendants may have direct instances.
The term Complete for a UML has the	Overlapping rule	Disjoint rule	Total specialization	Partial specialization			Total specializati

same meaning as which of the following for an EER diagram?			rule	rule			on rule
A UML diagram includes which of the following?	Class name	List of attributes	List of operations	All of the above.			All of the above.
An object can have which of the following multiplicities?	Zero	One	More than one	All of the above.			All of the above.
Which of the following statement is true concerning objects and/or classes?	An object is an instance of a class.	A class is an instance of an object.	An object includes encapsulates only data.	A class includes encapsulates only data.			An object is an instance of a class.
Which of the following applies to a class rather than an object?	Query	Update	Scope	Constructor			Scope
The benefits of object-oriented modeling are which of the following?	The ability to tackle more challenging problems	Reusability of analysis, design, and programming results	Improved communication between users, analysts, etc.	All of the above.			All of the above.
The term Incomplete for a UML has the same meaning as which of the following for an EER diagram?	Overlapping rule	Disjoint rule	Total specialization rule	Partial specialization rule			Partial specialization rule
A constructor operation does which of the following?	Creates a new instance of a class	Updates an existing instance of a class	Deletes and existing instance of a class	All of the above.			Creates a new instance of a class
Which of the following is a technique for hiding the internal implementation details of an object?	Encapsulation	Polymorphism	Inheritance	All of the above.			Encapsulation
Aggregation is which of the following?	Expresses a part-of relationship and is a stronger form of an	Expresses a part-of relationship and is a	Expresses an is-a relationship and is a stronger form	Expresses an is-a relationship and is a weaker form of an			Expresses a part-of relationship and is a

	association relationship.	weaker form of an association relationship.	of an association relationship.	association relationship.			stronger form of an association relationship.
The fact that the same operation may apply to two or more classes is called what?	Inheritance	Polymorphism	Encapsulation	Multiple classification			Polymorphism
The object-oriented development life cycle is which of the following?	Analysis, design, and implementation steps in the given order and using multiple iterations.	Analysis, design, and implementation steps in the given order and going through the steps no more than one time.	Analysis, design, and implementation steps in any order and using multiple iterations.	Analysis, design, and implementation steps in any order and going through the steps no more than one time.			Analysis, design, and implementation steps in the given order and using multiple iterations.
Which of the following statements best describes what a class diagram can include?	Only classes.	Only classes and their relationships.	Classes, instances and their relationships.	None			Classes, instances and their relationships.
Which is the correct name for "a possible set of classes, together with an understanding of how those classes might interact to deliver the functionality of a use case"?	use case class diagram.	realization.	collaboration.	generalization			collaboration.
One of the following is <b>not</b> a difference between a class diagram and a collaboration diagram. Which one?	A collaboration diagram shows object interaction, while a class diagram ignores this.	A class diagram shows more of the structural details than the collaboration diagram.	none	A class diagram shows the names of the classes, while the collaboration ignores these.			A class diagram shows the names of the classes, while the collaboration ignores these.
Which of these is the	Interface, control	Boundary,	Interface,	none			Boundary,

correct set of analysis class stereotypes in standard UML?	and entity.	control and entity.	sequence and entity.				control and entity.
One of the following is <b>not</b> an advantage of stereotyping analysis classes. Which one?	The resulting packages can form a basis for the system's architecture.	It can be useful to differentiate classes that have broad similarities in the way that they behave.	Once a class is stereotyped, its behaviour is likely to become more predictable.	none			Once a class is stereotyped, its behaviour is likely to become more predictable.
What do boundary classes represent?	Customers and suppliers of the business.	People who will use the system.	none	Interaction between the system and its actors.			Interaction between the system and its actors.
What is the significance of the double colon in the class name: User Interface::AddAdvert UI?	The class called AddAdvertUI is in the package called User Interface.	User Interface is the stereotype of a class called AddAdvertUI.	User Interface and AddAdvertUI are two alternative names for the same class.	none			The class called AddAdvert UI is in the package called User Interface.
What are entity classes?	Classes that contain data.	Classes that contain persistent data.	Classes that represent something or some concept in the application domain.	classes contain relationship			Classes that represent something or some concept in the application domain.
What do control classes represent?	The calculation and scheduling aspects of the logic of the use case.	Classes that interact with the users of the system.	Classes that control the storage of persistent data.	scheduling only			The calculation and scheduling aspects of the logic of the use case.
One of the following <b>cannot</b> directly affect the state of an object. Which one?	A change in the value of one of its attributes.	The creation or destruction of another object of the	The creation or destruction of a link with another object.	none			The creation or destruction of another object of

		same class.					the same class.
What is the difference between a link and an association?	A link connects two instances, while an association connects two classes.	A link is a transient association.	A link is an association between two entity classes.	A link is for communication			A link connects two instances, while an association connects two classes.
What is the significance of the multiplicity of an association?	It denotes the number of different classes that can be linked together.	It constrains the number of objects of one participating class that can be linked to an object of the other class.	It constrains the number of times that an object of one participating class can be linked during its lifetime.	it contains relationships only			It constrains the number of objects of one participating class that can be linked to an object of the other class.
How do operations differ from methods?	A method is a particular implementation of an operation.	An operation is a particular implementation of a method.	Some object-oriented programming languages have methods, while other have operations.	methods is rules			A method is a particular implementation of an operation.
Why is it often difficult to determine the most appropriate choice of responsibilities for each class?	Because there may be several alternatives that appear equally justified.	Because the developers may not know enough about how the users want the system to be designed.	Because members of the development team are often lazy and avoid responsibility as much as they can.	none			Because there may be several alternatives that appear equally justified.

## UNIT-V

QUESTIONS	OPT1	OPT2	OPT3	OPT4	OPT5	OPT6	ANSWER
Testing is a ----- if a program does not work correctly.	Failure.	Success.	Complete.	Partial.			Failure.

Loop testing comes under which testing method	White box .	Black box.	Green box.	Yellow box.			White box .
Which testing methods are used by end-users who actually test software before they use it.	Trial and Error testing.	Alpha and Beta testing.	White box testing.	Black box testing.			Alpha and Beta testing.
To test a function, the programmer has to wrote a ---- which calls the function and passes its test data.	Stub.	Proxy.	Driver.	None of the above.			Driver.
The testing technique that requires devising test cases to exercise the internal logic of a software module is called-----	White box testing.	Glass box testing.	Grey box testing.	Black box testing.			Black box testing.
Independent test groups is a part of--- -----	Software development project team.	Software testing team.	Execution.	Planning team.			Software development project team.
Low level components are combined into clusters in	Top down integration.	Integration testing.	Bottom up integration.	Cluster testing.			Bottom up integration.
Testing OO class operations is made more difficult by	Encapsulation.	Inheritance.	Polymorphism.	Both Inheritance and Polymorphism.			Both Inheritance and Polymorphism.
Unit testing is a	Black box testing.	White box testing.	Stress testing.	None of the above.			Black box testing.
The important element of the validation process is a -----	Alpha testing.	Beta testing.	Gamma testing.	Configuration review.			Configuration review.

The different classes of loops seen in loop testing are	Simple loop, Nested loop, structure loop, Unstructured loop.	Simple loop, Nested loop, For loop, Structured loop.	Nested loop, While loop, Do while loop, For loop.	Simple loop, Nested loop, Concatenated, Unstructured loop.			Simple loop, Nested loop, Concatenated , Unstructured loop.
Select the correct characteristics that lead to testable software.	Testability, Stability and Consistency.	Testability, Understandability and Simplicity.	Communication, Speed and stability.	Versatility, Accuracy and Testability.			Testability, Understandability and Simplicity.
Both Hardware and Software are integrated and tested for error in	Task testing.	Behavioral testing.	validation testing.	System testing.			System testing.
Software testing accounts to what percent of software development costs?	10-20.	40-50 .	70-80.	5-10.			40-50 .
Loop Testing comes under which testing method?	Black box testing.	White box testing.	Yellow box testing.	Green box testing.			White box testing.
Graph based testing comes under which testing methods?	Black box testing.	White box testing.	Yellow box testing.	Green box testing.			Black box testing.
_____ of software design defines the relationship between major structural elements of the software, styles and design patterns.	interface design	architectural design	class design	design activity			architectural design
The importance of software design can be stated with a single word _____.	Customer requirement	engineering	model	quality			quality

Software design is an iterative process through which requirements are translated into a _____ for constructing the software.	Blueprint	process	scenario	system design			Blueprint
_____ refers to a sequence of instructions that have a specific and limited function in software design.	abstraction	data abstraction	procedural abstraction	limit data.			procedural abstraction
Collection of data that describes a data object is design concept is called _____.	data abstraction	abstraction	procedural abstraction	data structure.			data abstraction
The overall structure of the software and the ways in which that structure provides conceptual integrity for a system is named as _____.	software engineering	software design	software abstraction	software architecture.			software architecture.
Architectural design can be represented using the models like _____, _____, _____ & _____.	structural, framework, dynamic, process & functional.	software, futuristic, design, process & framework.	regular, dependant, engineering, architectural & conceptual.	none of the above.			structural, framework, dynamic, process & functional.
_____ is the concept used to hide the details of data structure and procedural processing behind a module interface in software engineering.	data hiding	information hiding	design hiding	all the above.			information hiding

In the design patterns _____ is the language specific patterns generally implement an algorithm element of a component & specific interface protocol.	idioms	coding patterns	framework	both idioms & coding patterns			both idioms & coding patterns
_____ represents a implementation-specific skeletal infrastructure for design work.	framework	design	protocol	none			framework
The two components of software architecture design pyramid are _____ & _____	design data & design model	data design & architectural design	data analysis & design analysis	data design & design analysis			data design & architectural design
_____ is a technique that reuses design elements that have proven successful in the past.	pattern-based design	programming based data	pattern programming	programming design.			pattern-based design
_____ are used to create interface and also interacts with software.	sub class	super class	controller class	boundary class			boundary class
_____ is used to assemble a collection of related classes.	methods	objects	package	instance.			package
When faced with severe deadline pressure, experienced project managers some times use a project scheduling and control technique called _____	White - Boxing	Black -Boxing	Time-Boxing	Effort Validation			Time-Boxing

_____ enables you to determine what tasks will be conducted at a given point in time.	Time - Boxing	Time line chart	Project tables	Scheduling tool			Time line chart
Independent test groups is a part of--- -----	Software development project team.	Software testing team.	Execution.	Planning team.			Software development project team.
Overloading without explicit arguments to an operator is known as -----	operator overloading	Argument overloading	Unary operator overloading	Binary operator overloading			Unary operator overloading
Overloading with single explicit arguments to an operator is known as -----	operator overloading	Argument overloading	Unary operator overloading	Binary operator overloading			Binary operator overloading
_____ feature can be used to add two user-defined operator data types.	Function	Overloading	Arrays	Pointers			Overloading
Which of the following overloading operator does not allow in operator function in c++?	+	>>	./	?:			?:
Pure virtual function should be declare in -----	public	private	protected	outside the class			public
The friend function binary operator overloading operator must have _____ operand	two	three	one	four			three
The friend function unary operator overloading operator must have _____ operand	two	three	one	four			one

The technique of building new classes from the existing class is called ----- ----	inheritance	friend	polymorphism	Overloading			inheritance
The class derived from two or more than two base class is called _____.	single inheritance	multiple inheritance	hybrid inheritance	hierarchal inheritance			multiple inheritance
Derivation of several classes from a single base class is called _____.	single inheritance	multiple inheritance	hybrid inheritance	hierarchal inheritance:			hierarchal inheritance:
Overloading feature can add two _____ data types.	in-built	enumerated	user-defined	static			user-defined
The public member of a class can be accessed by its own objects using the _____ operator.	Scope resolution	Relational	Arithmetic	DotAns:			DotAns:
Derivation of a class from another derived classes is called _____.	multilevel inheritance	multiple inheritance	hybrid inheritance	hierarchal inheritanceAns:			multilevel inheritance
Derivation of class involving more than one form of inheritance is called _____	multilevel inheritance	multiple inheritance	hybrid inheritance	hierarchal inheritance			hybrid inheritance
.A _____ is a function declared in a base class that has no definition relative to the base class.	virtual function	pure virtual function	stream	class			pure virtual function
Pure virtual function is equated to -----	0	1	2	3			0
Inheritance provides the concept of _____.	derived class	subclass	virtual base class	reusability			reusability
The virtual function must be defined in _____	Public	Private	Protected	Private or protected			Public

The function in base class is declared as virtual using the keyword _____	Virtual	virtual function	pure virtual	friend			Virtual
Virtual functions are from the concept of _____	objects	polymorphism	inheritance	None.			polymorphism
To use a friend function to overload the ++ or -- operators we have to pass the ---- as a _____.	operator & argument	operand & reference parameter	object & reference parameter	object & argument			operand & reference parameter
_____ is achieved when a virtual function is accessed through a pointer to the base class.	run time polymorphism	inheritance	class	friend.			run time polymorphism
We cannot have virtual constructors but _____ are allowed.	translators	default constructor	virtual destructor	static members.			virtual destructor
The keywords private and public are known as _____ labels.	static	dynamic	visibility	const			visibility
Duplication of inherited members of ____ inheritance avoided by making the common base class, a virtual base class.	single	multi-level	multipath	hierarchicalAns			multipath
----- is the default visibility mode.	private	public	protected	visibility mode must be any of public, private , protected			private
Operator overloading in a class known as _____	function overload operator	operator overload function		Overloading operator			Overloading operator

